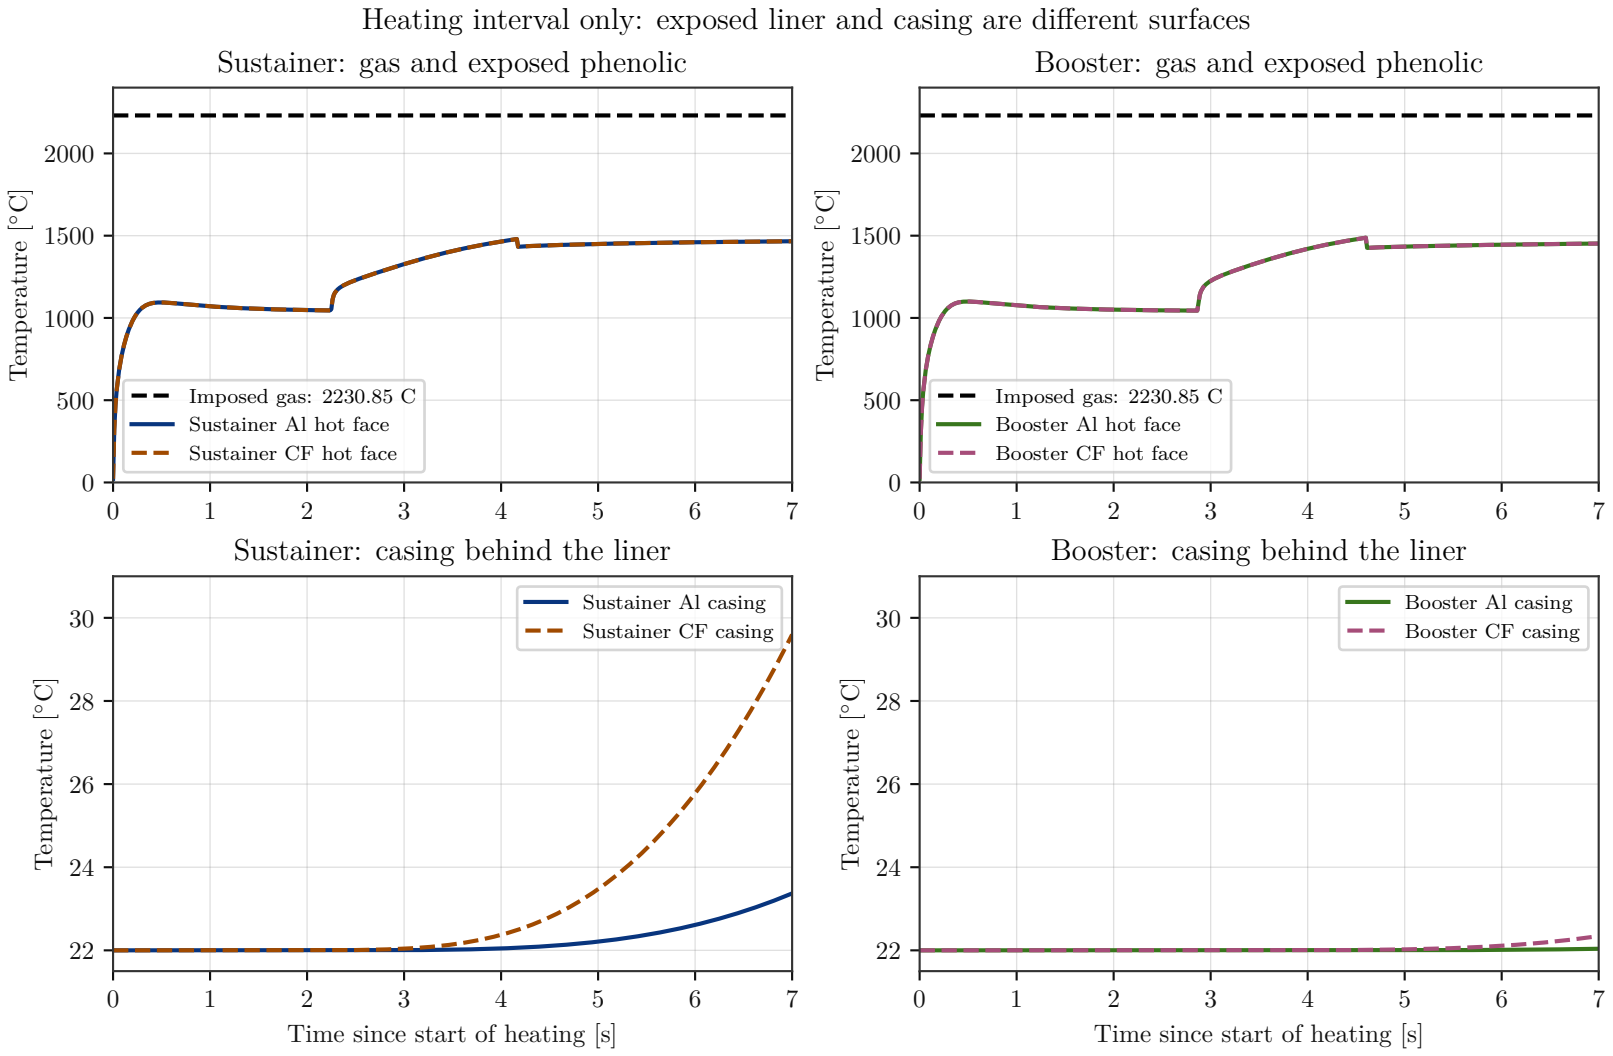

Heating interval only: exposed liner and casing are different surfaces
Sustainer: gas and exposed phenolic
Booster: gas and exposed phenolic
Temperature [°C]
Imposed gas: 2230.85 C
Sustainer Al hot face
Sustainer CF hot face
Booster Al hot face
Booster CF hot face
Sustainer: casing behind the liner
Booster: casing behind the liner
Sustainer Al casing
Sustainer CF casing
Booster Al casing
Booster CF casing
Time since start of heating [s]