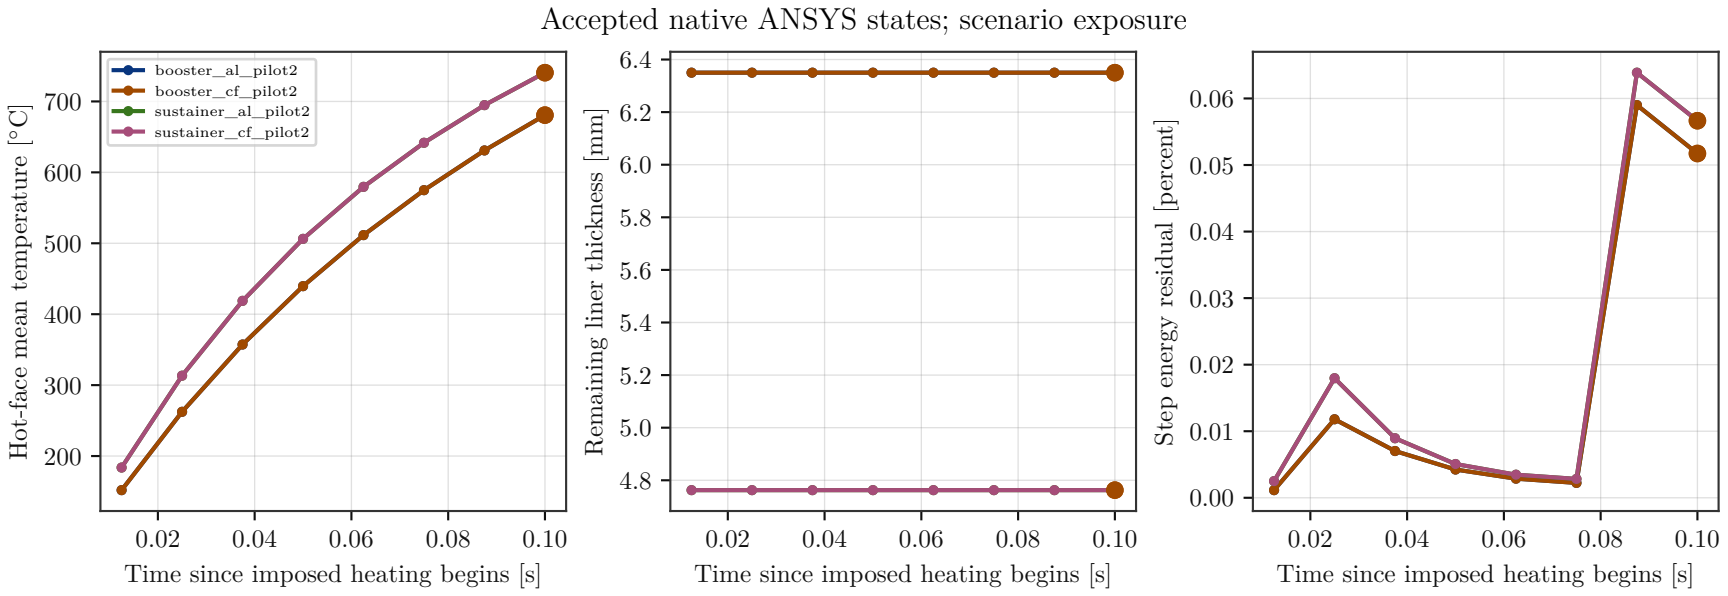

Accepted native ANSYS states; scenario exposure
booster_al_pilot2
booster_cf_pilot2
sustainer_al_pilot2
sustainer_cf_pilot2
Hot-face mean temperature [°C]
Time since imposed heating begins [s]
Remaining liner thickness [mm]
Time since imposed heating begins [s]
Step energy residual [percent]
Time since imposed heating begins [s]