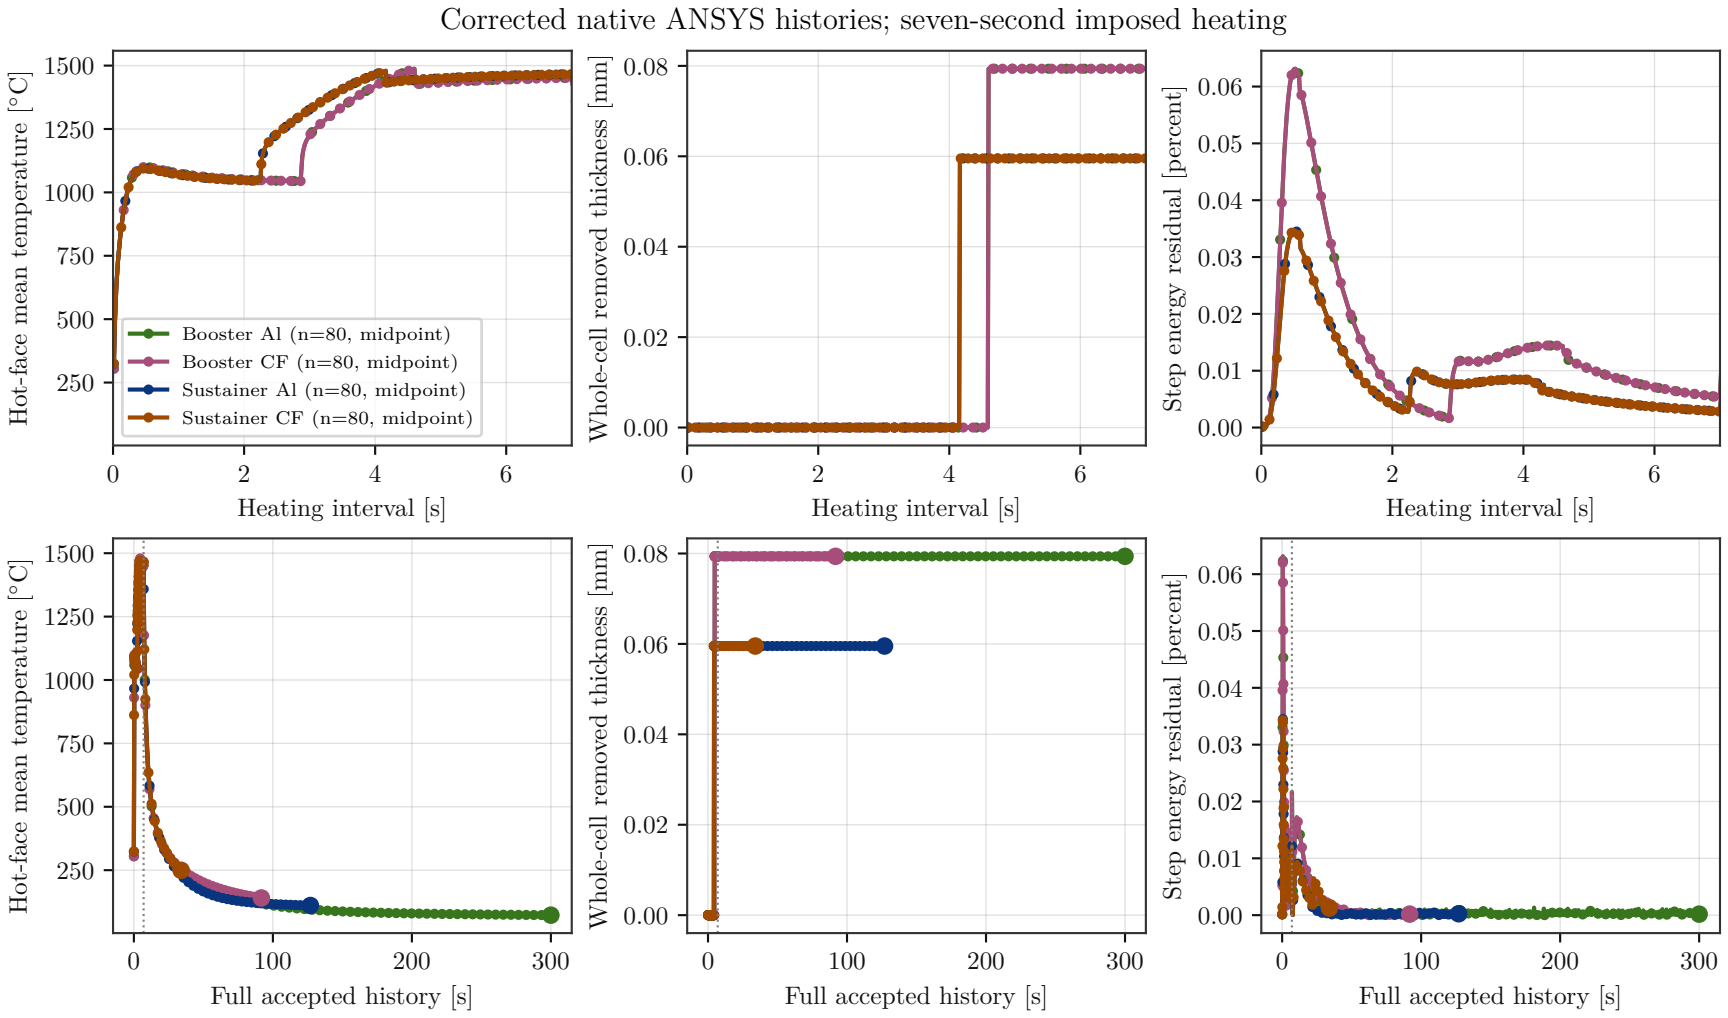

Corrected native ANSYS histories; seven-second imposed heating
Hot-face mean temperature [°C]
Whole-cell removed thickness [mm]
Step energy residual [percent]
Heating interval [s]
Full accepted history [s]
Booster Al (n=80, midpoint)
Booster CF (n=80, midpoint)
Sustainer Al (n=80, midpoint)
Sustainer CF (n=80, midpoint)