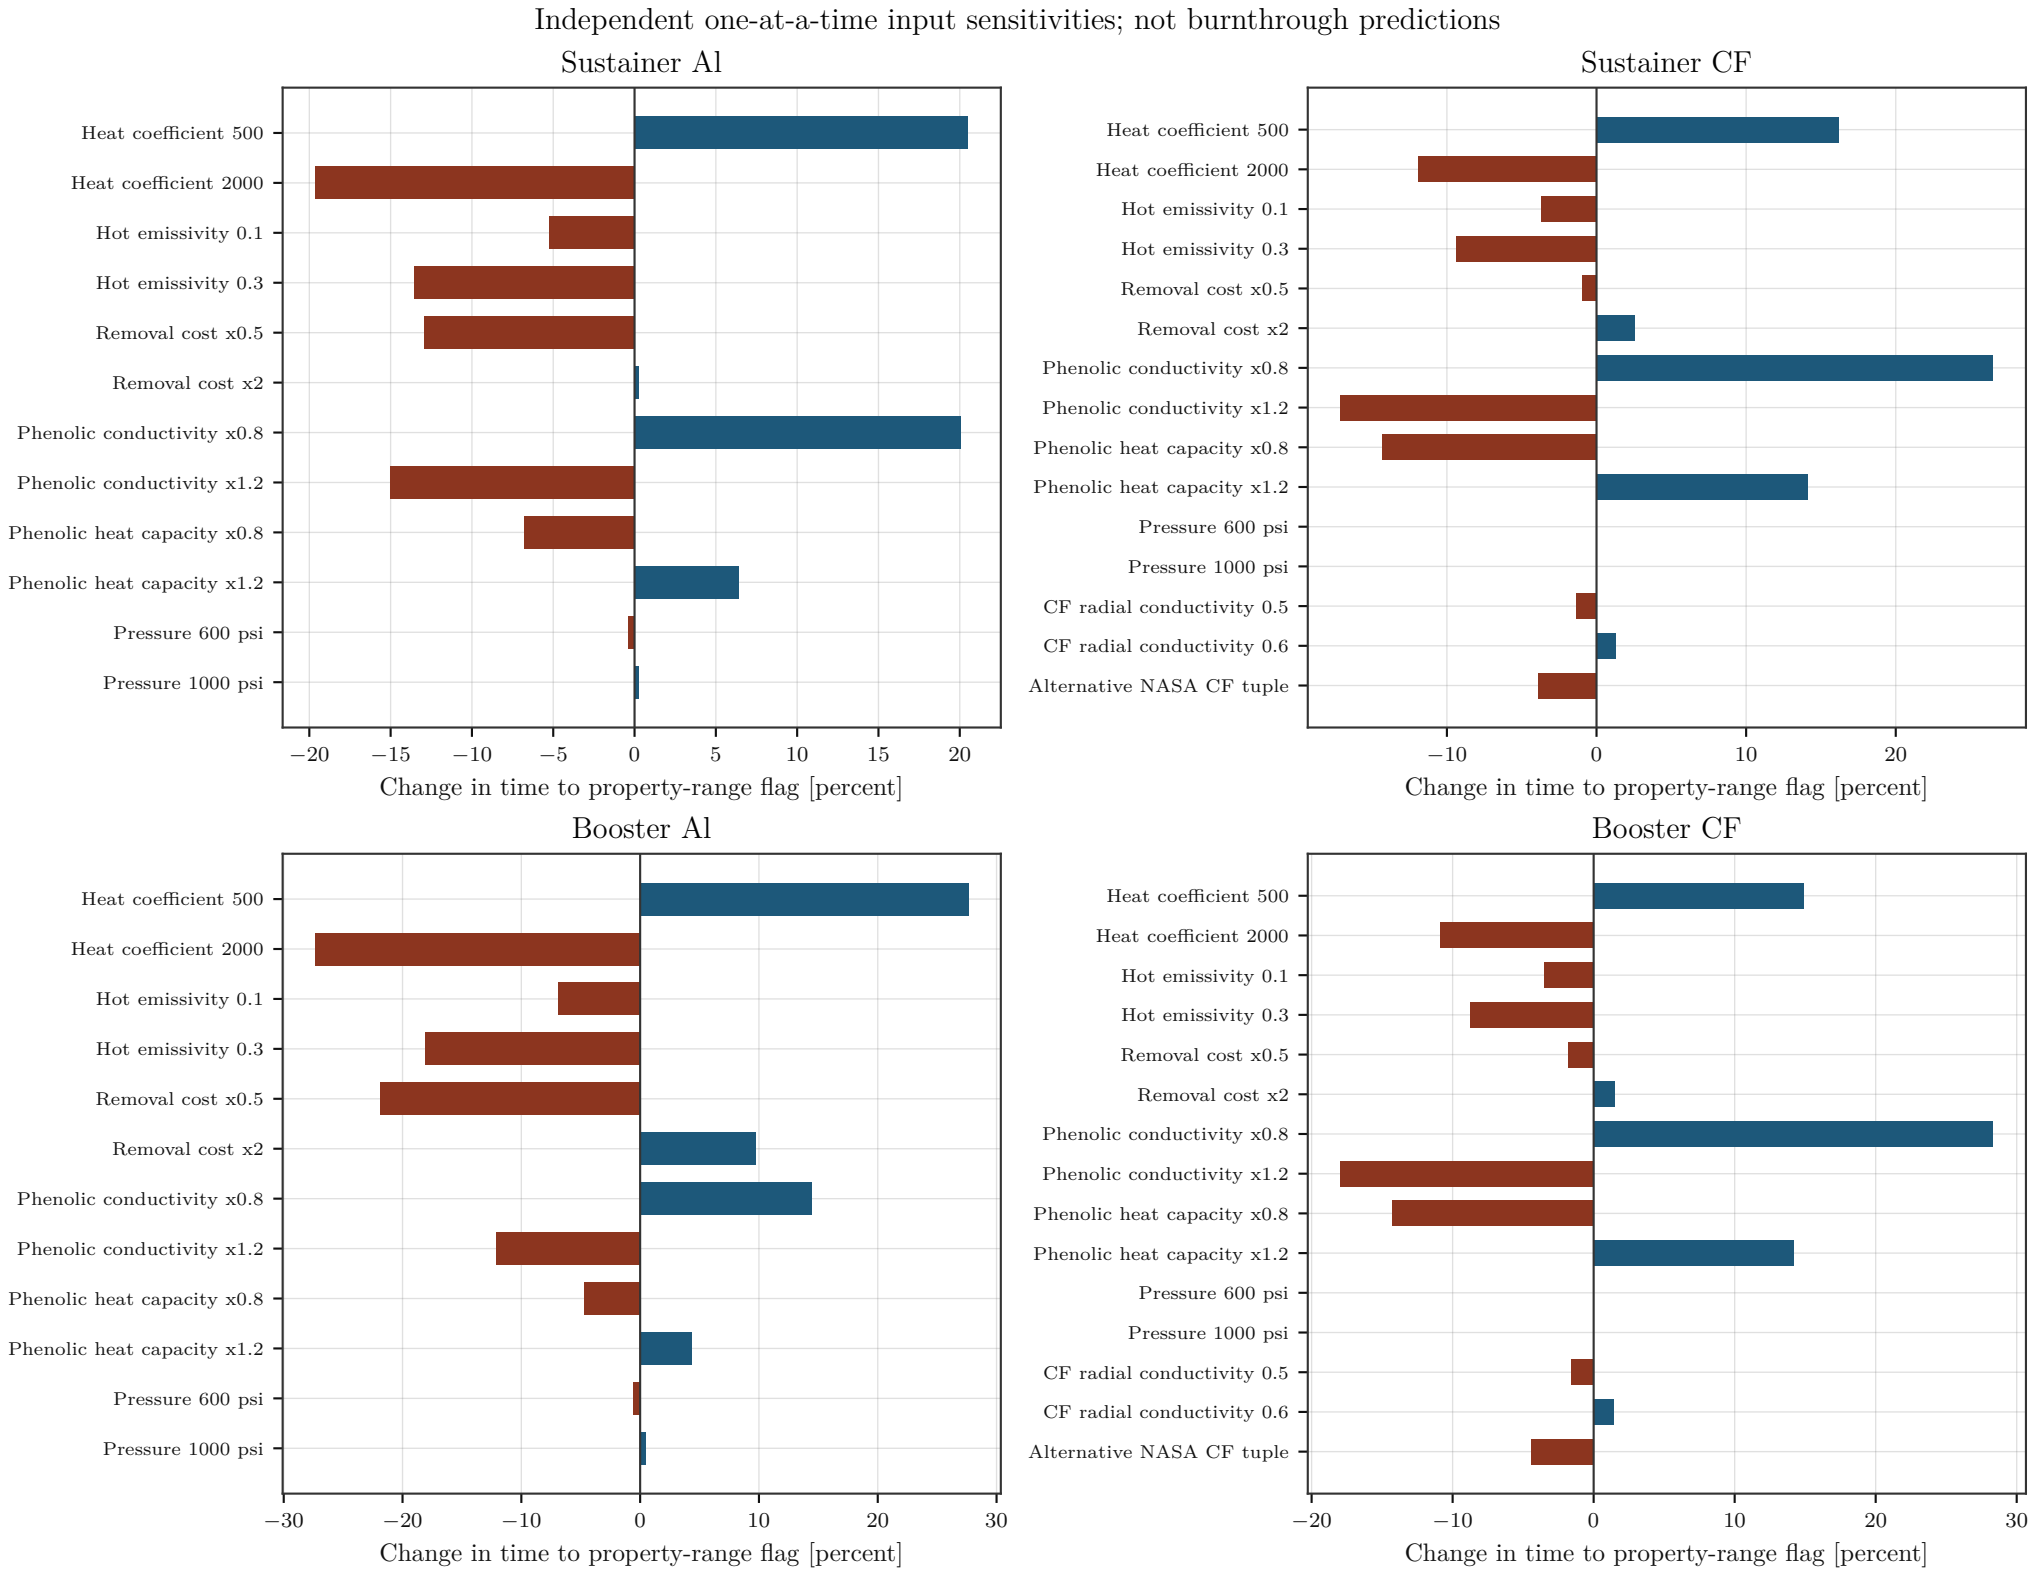

Independent one-at-a-time input sensitivities; not burnthrough predictions
Sustainer Al
Sustainer CF
Booster Al
Booster CF
Heat coefficient 500
Heat coefficient 2000
Hot emissivity 0.1
Hot emissivity 0.3
Removal cost x0.5
Removal cost x2
Phenolic conductivity x0.8
Phenolic conductivity x1.2
Phenolic heat capacity x0.8
Phenolic heat capacity x1.2
Pressure 600 psi
Pressure 1000 psi
CF radial conductivity 0.5
CF radial conductivity 0.6
Alternative NASA CF tuple
Change in time to property-range flag [percent]