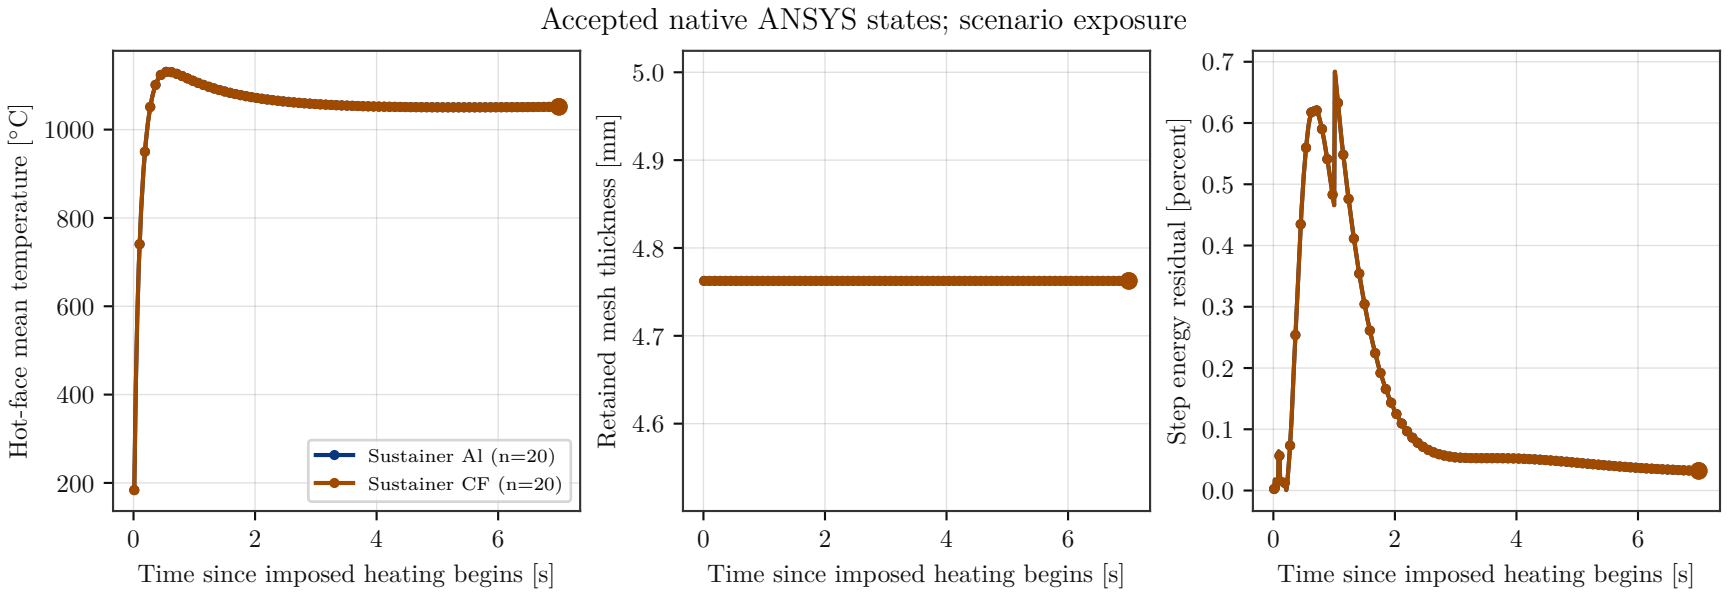

Accepted native ANSYS states; scenario exposure
Hot-face mean temperature [°C]
1000
800
600
400
200
Sustainer Al (n=20)
Sustainer CF (n=20)
0
2
4
6
Time since imposed heating begins [s]
Retained mesh thickness [mm]
5.0
4.9
4.8
4.7
4.6
0
2
4
6
Time since imposed heating begins [s]
Step energy residual [percent]
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0.0
0
2
4
6
Time since imposed heating begins [s]