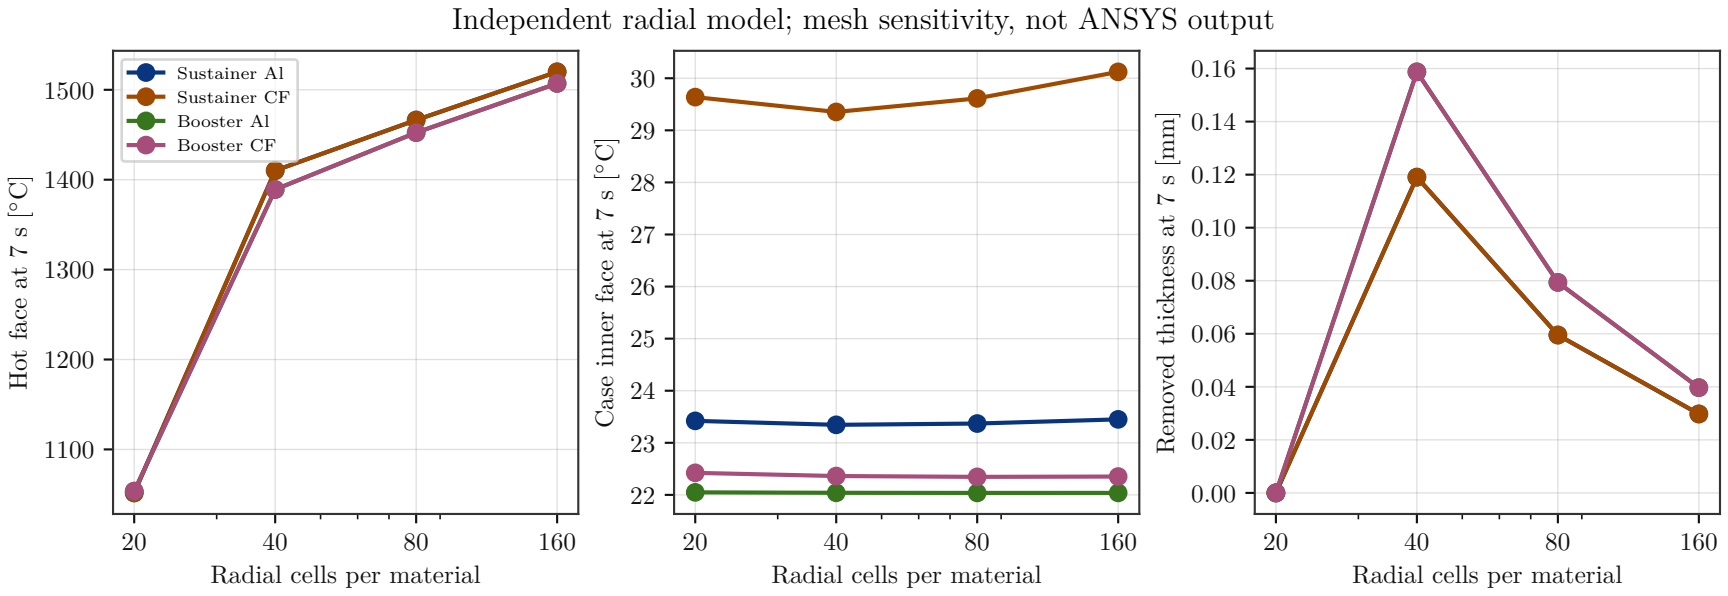

Independent radial model; mesh sensitivity, not ANSYS output
Sustainer Al
Sustainer CF
Booster Al
Booster CF
Hot face at 7 s [°C]
Case inner face at 7 s [°C]
Removed thickness at 7 s [mm]
Radial cells per material
Radial cells per material
Radial cells per material
1500
1400
1300
1200
1100
30
29
28
27
26
25
24
23
22
0.16
0.14
0.12
0.10
0.08
0.06
0.04
0.02
0.00
20
40
80
160