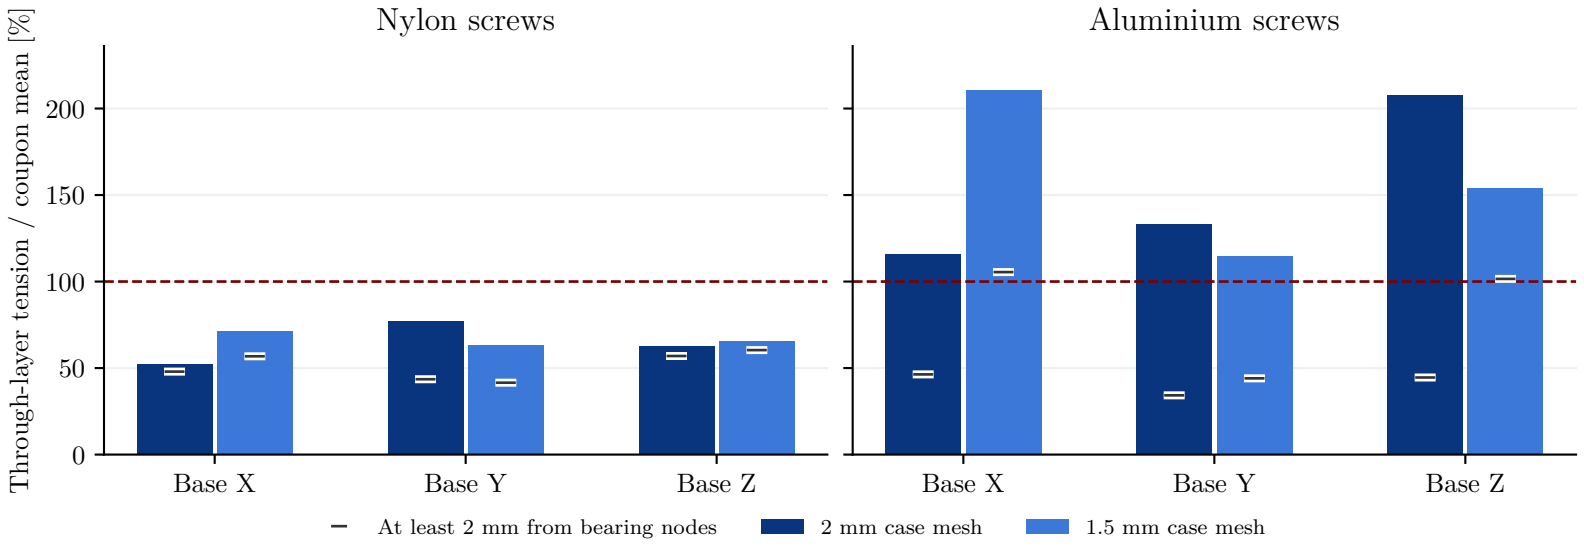

Nylon screws
Aluminium screws
Through-layer tension / coupon mean [%]
0
50
100
150
200
Base X
Base Y
Base Z
Base X
Base Y
Base Z
At least 2 mm from bearing nodes
2 mm case mesh
1.5 mm case mesh