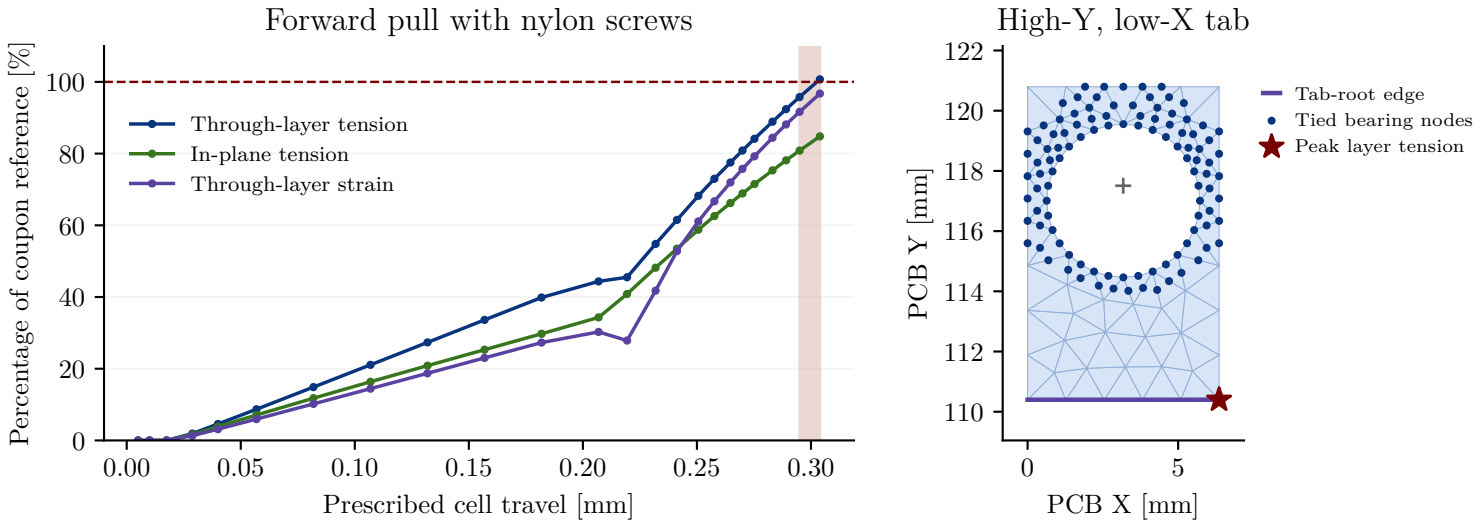

Forward pull with nylon screws
Percentage of coupon reference [%]
Prescribed cell travel [mm]
Through-layer tension
In-plane tension
Through-layer strain
0
20
40
60
80
100
0.00
0.05
0.10
0.15
0.20
0.25
0.30
High-Y, low-X tab
PCB Y [mm]
PCB X [mm]
Tab-root edge
Tied bearing nodes
Peak layer tension
110
112
114
116
118
120
122
0
5