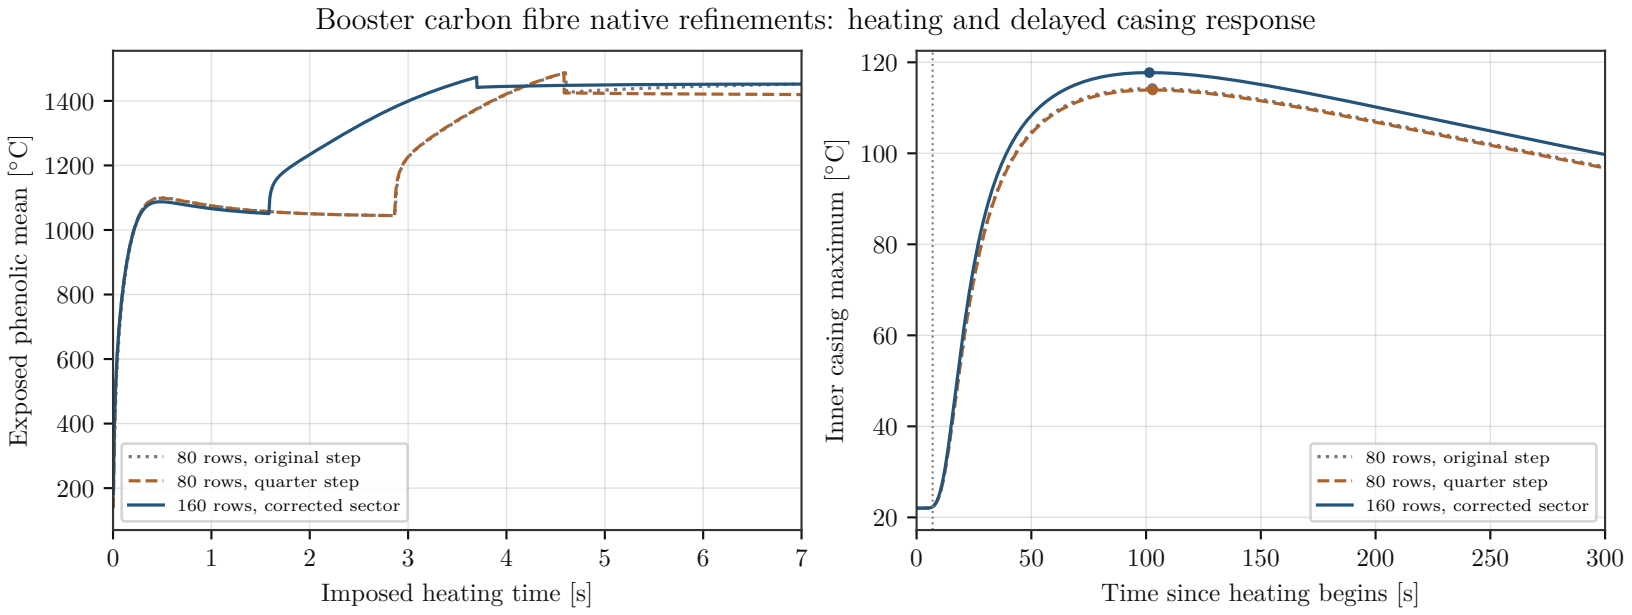

Booster carbon fibre native refinements: heating and delayed casing response
Exposed phenolic mean [°C]
Imposed heating time [s]
80 rows, original step
80 rows, quarter step
160 rows, corrected sector
Inner casing maximum [°C]
Time since heating begins [s]
80 rows, original step
80 rows, quarter step
160 rows, corrected sector