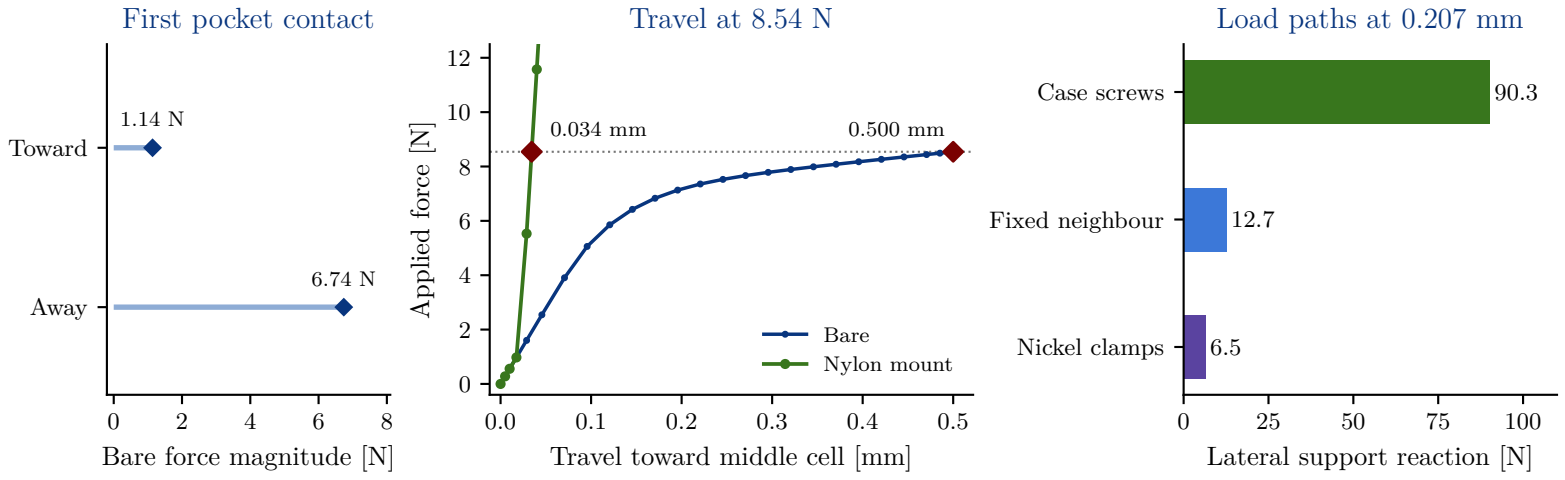

First pocket contact
Toward
Away
1.14 N
6.74 N
0
2
4
6
8
Bare force magnitude [N]
Travel at 8.54 N
Applied force [N]
0.034 mm
0.500 mm
Bare
Nylon mount
0.0
0.1
0.2
0.3
0.4
0.5
Travel toward middle cell [mm]
Load paths at 0.207 mm
Case screws
Fixed neighbour
Nickel clamps
90.3
12.7
6.5
0
25
50
75
100
Lateral support reaction [N]