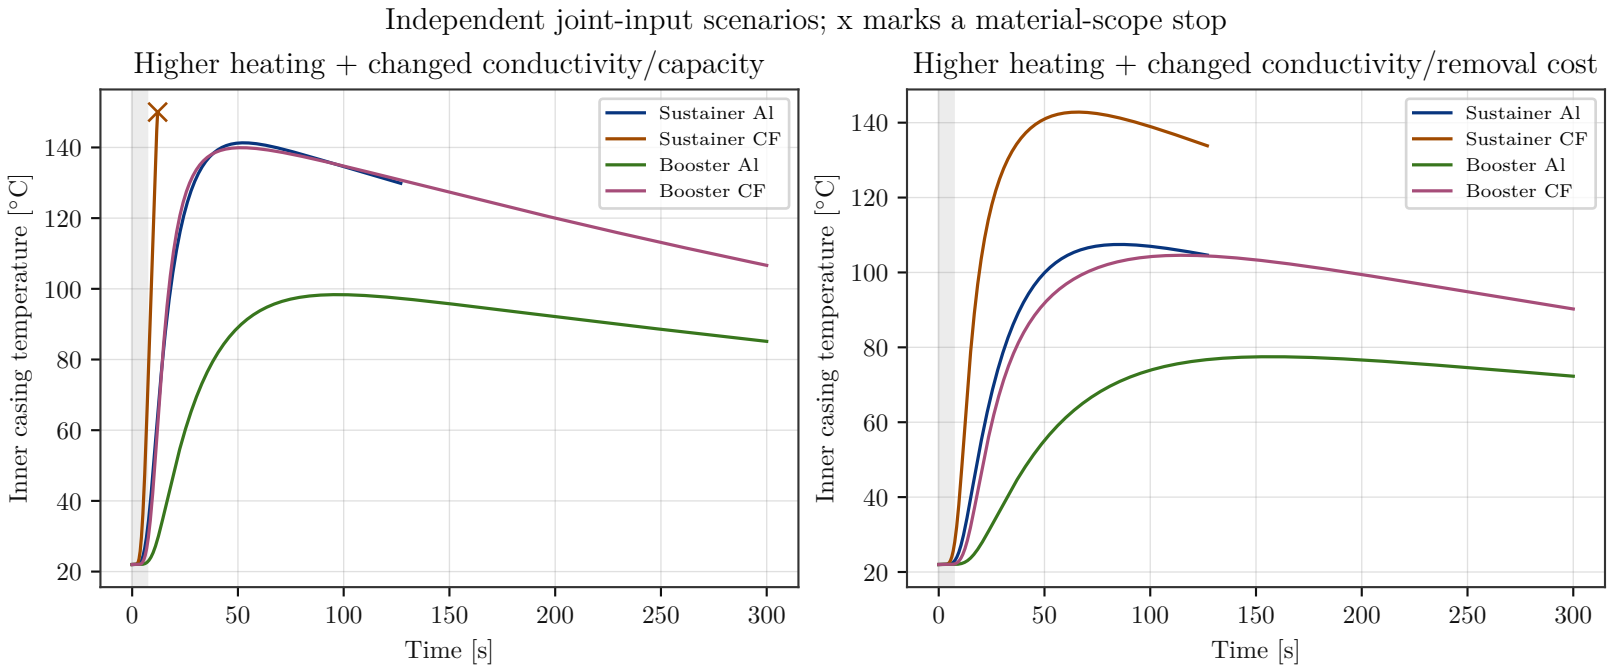

Independent joint-input scenarios; x marks a material-scope stop
Higher heating + changed conductivity/capacity
Higher heating + changed conductivity/removal cost
Inner casing temperature [°C]
Time [s]
Sustainer Al
Sustainer CF
Booster Al
Booster CF
20
40
60
80
100
120
140
0
50
100
150
200
250
300