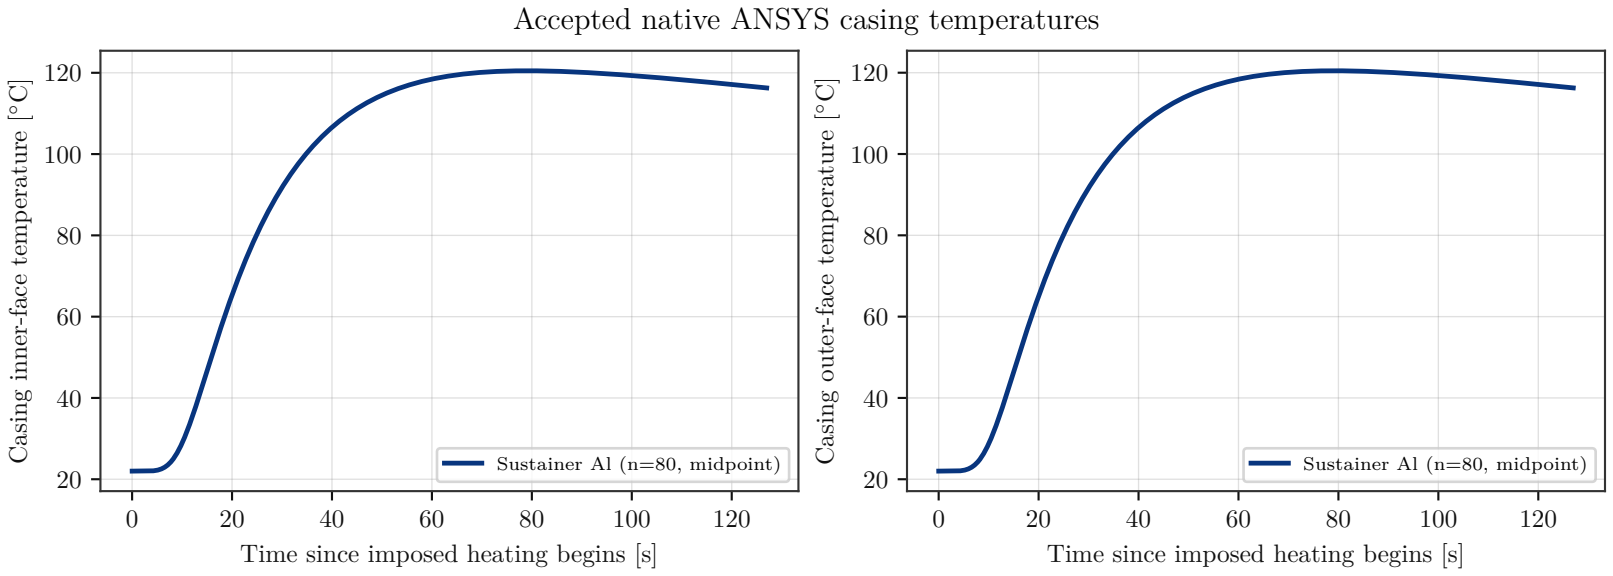

Accepted native ANSYS casing temperatures
Casing inner-face temperature [°C]
Casing outer-face temperature [°C]
Time since imposed heating begins [s]
Time since imposed heating begins [s]
Sustainer Al (n=80, midpoint)
Sustainer Al (n=80, midpoint)
20
40
60
80
100
120
0
20
40
60
80
100
120