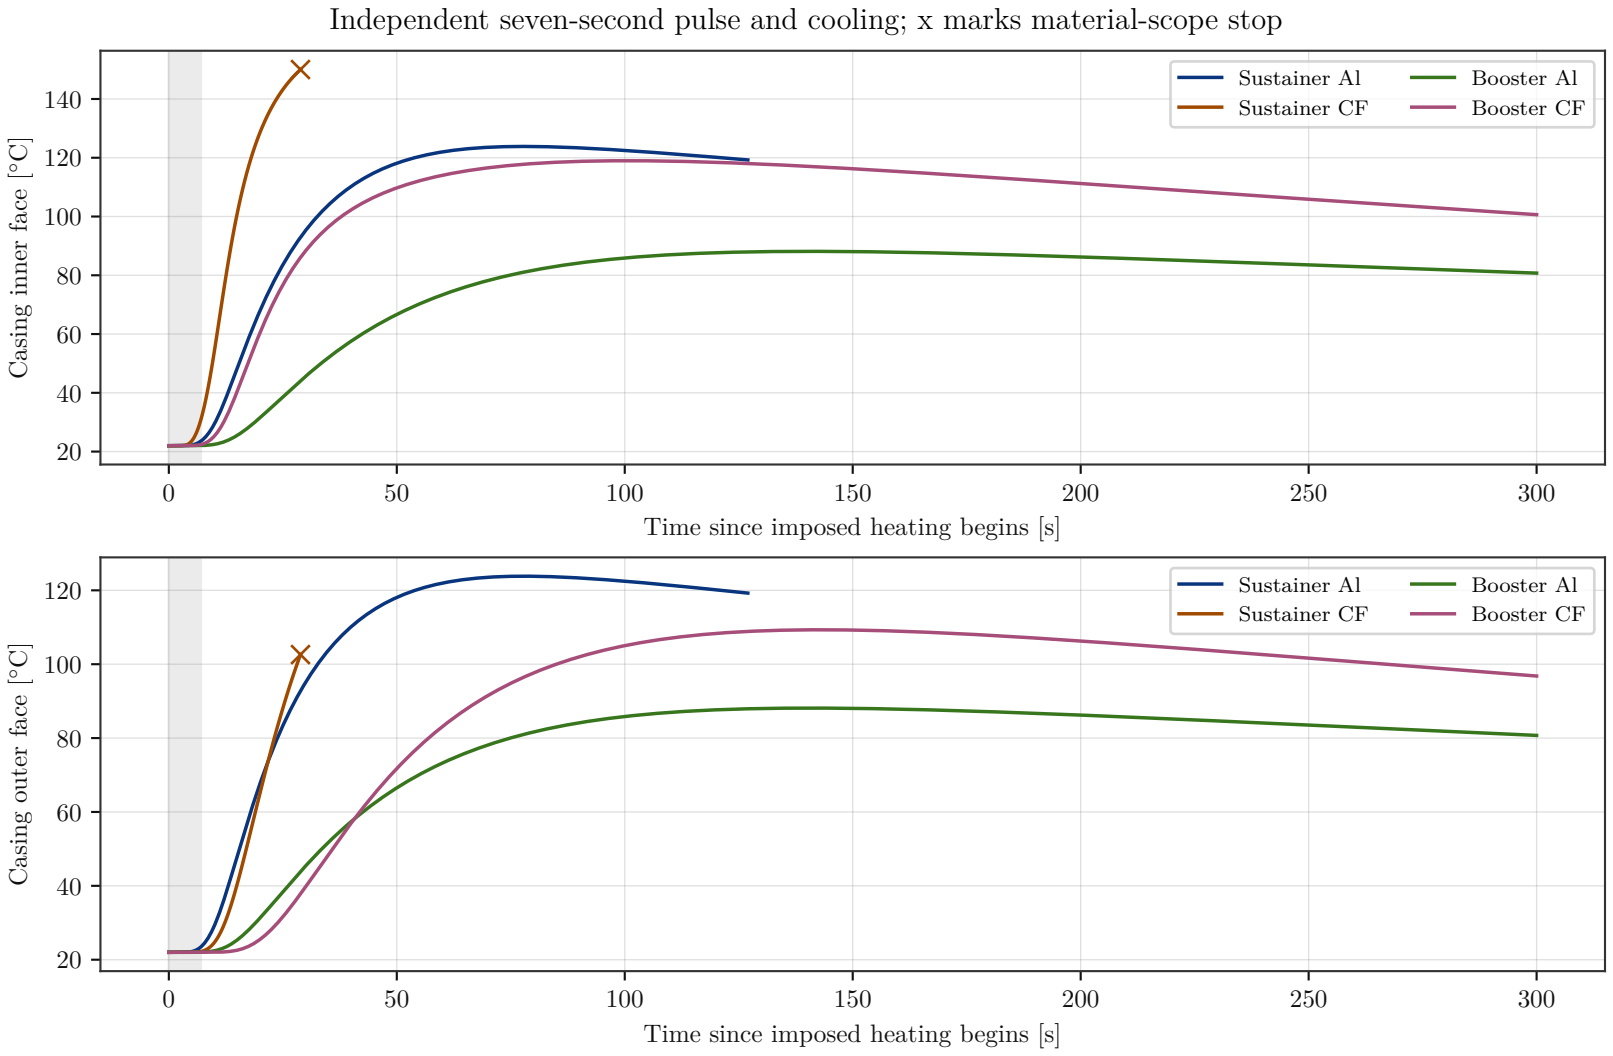

Independent seven-second pulse and cooling; x marks material-scope stop
Sustainer Al
Sustainer CF
Booster Al
Booster CF
Casing inner face [°C]
Time since imposed heating begins [s]
Casing outer face [°C]
Time since imposed heating begins [s]