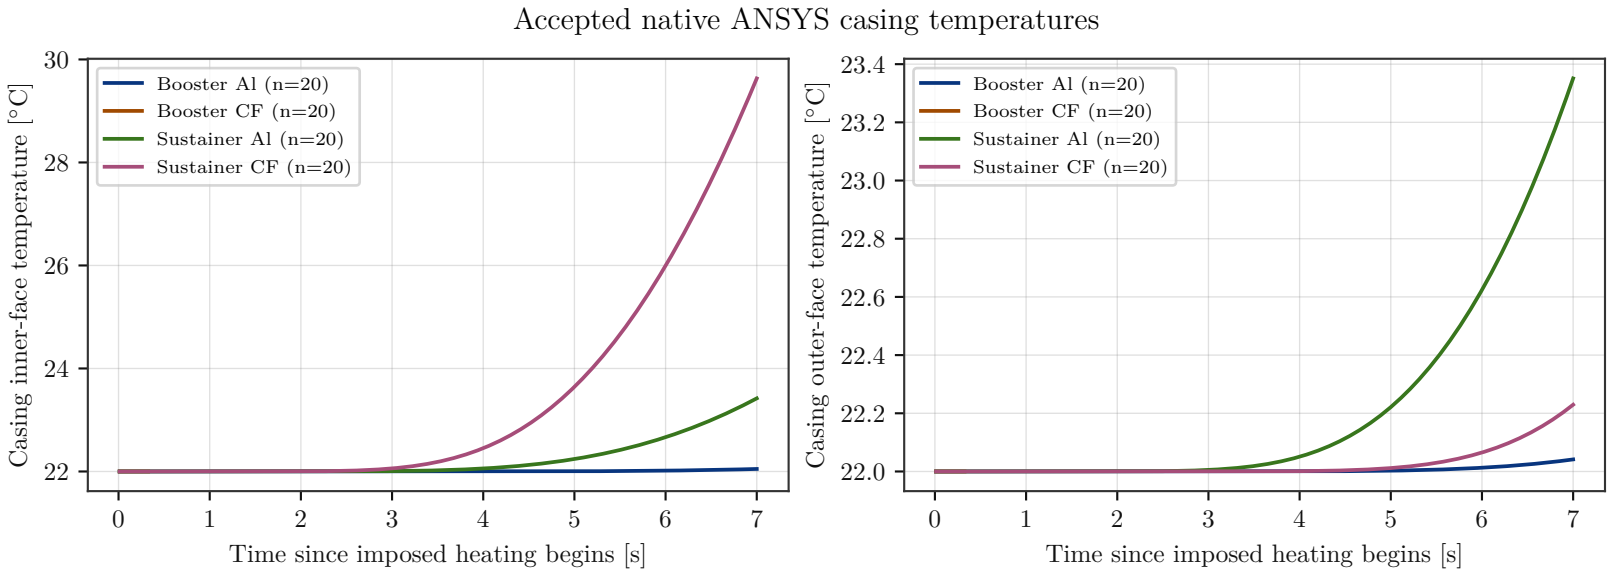

Accepted native ANSYS casing temperatures
Booster Al (n=20)
Booster CF (n=20)
Sustainer Al (n=20)
Sustainer CF (n=20)
Casing inner-face temperature [°C]
30
28
26
24
22
0
1
2
3
4
5
6
7
Time since imposed heating begins [s]
Booster Al (n=20)
Booster CF (n=20)
Sustainer Al (n=20)
Sustainer CF (n=20)
Casing outer-face temperature [°C]
23.4
23.2
23.0
22.8
22.6
22.4
22.2
22.0
0
1
2
3
4
5
6
7
Time since imposed heating begins [s]