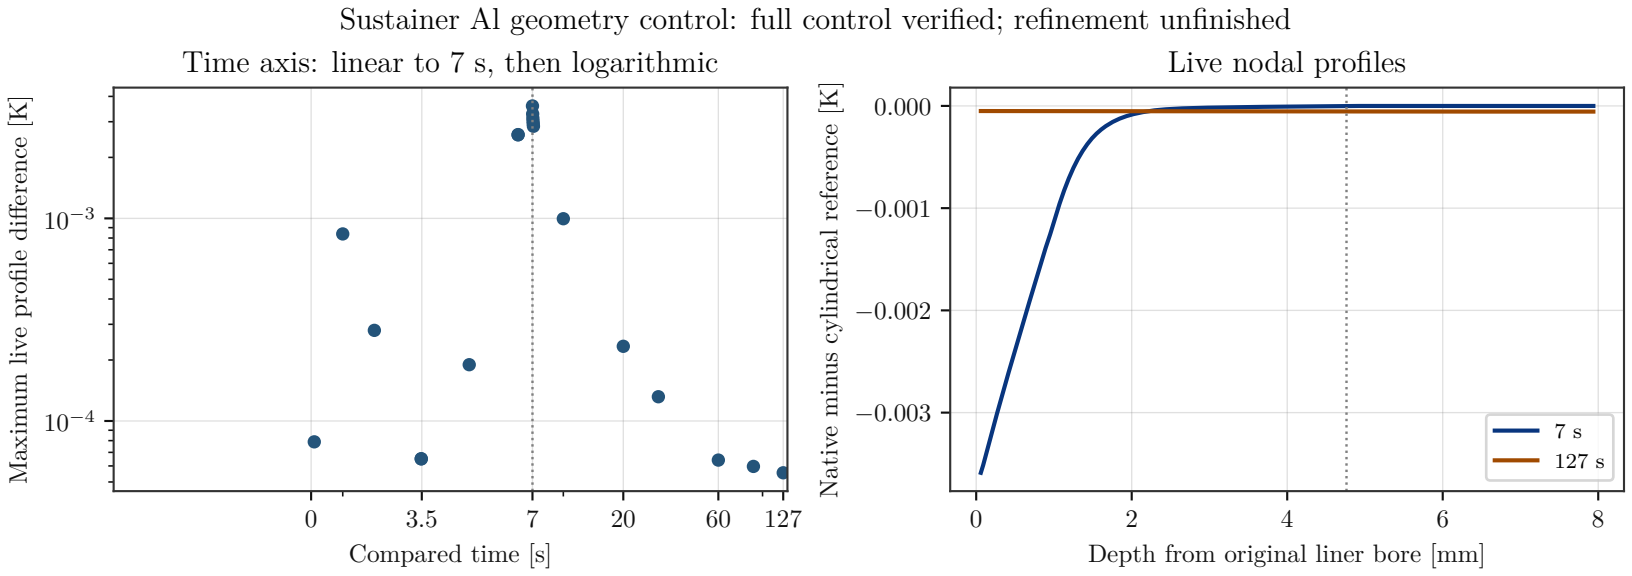

Sustainer Al geometry control: full control verified; refinement unfinished
Time axis: linear to 7 s, then logarithmic
Live nodal profiles
Maximum live profile difference [K]
$10^{-3}$
$10^{-4}$
0
3.5
7
20
60
127
Compared time [s]
Native minus cylindrical reference [K]
0.000
−0.001
−0.002
−0.003
0
2
4
6
8
Depth from original liner bore [mm]
7 s
127 s