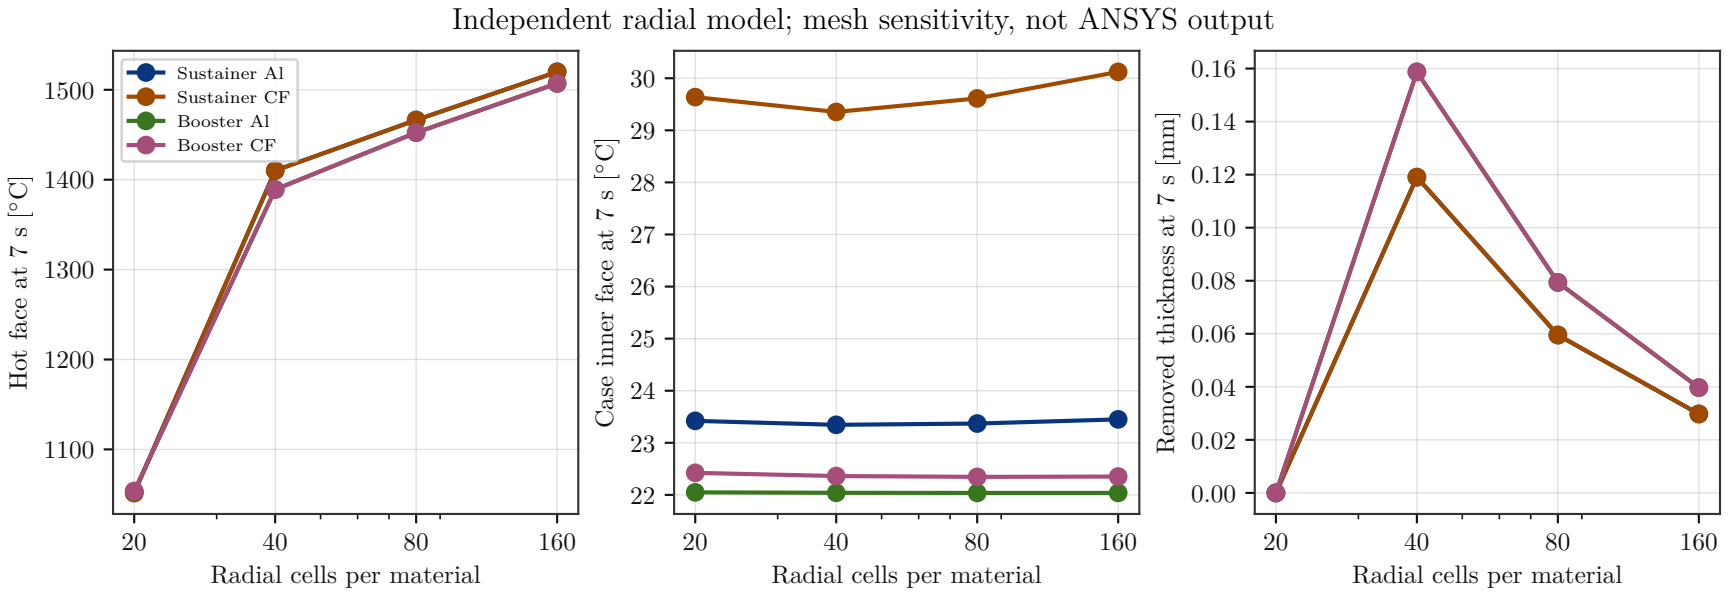

Independent radial model; mesh sensitivity, not ANSYS output
Sustainer Al
Sustainer CF
Booster Al
Booster CF
Hot face at 7 s [°C]
Case inner face at 7 s [°C]
Removed thickness at 7 s [mm]
Radial cells per material
Radial cells per material
Radial cells per material
1100
1200
1300
1400
1500
22
23
24
25
26
27
28
29
30
0.00
0.02
0.04
0.06
0.08
0.10
0.12
0.14
0.16
20
40
80
160