Balius Canards · J800T · Minimum deployment altitude

30 paired flights per altitude · 10 mph mean wind · normal mass σ = 5% · normal Cd σ = 2%

Settled = within ±5% of the paired baseline descent speed throughout the final 1 second before impact

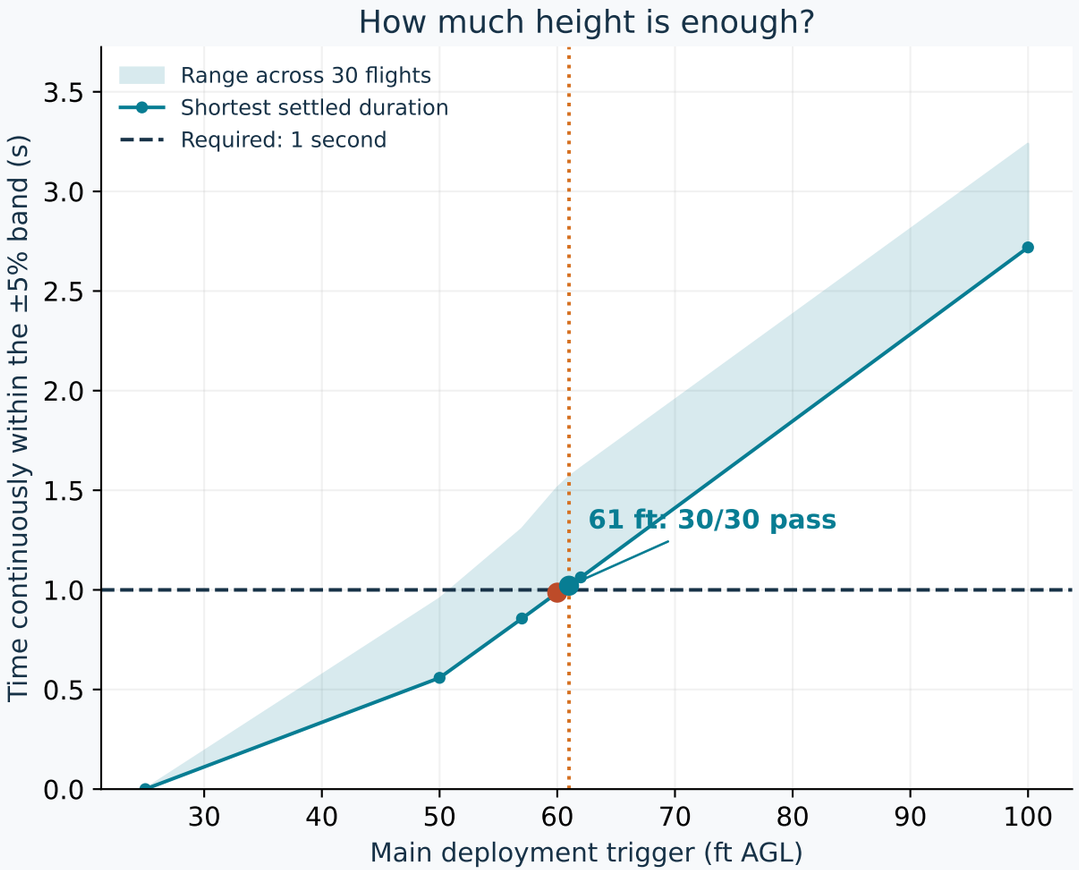

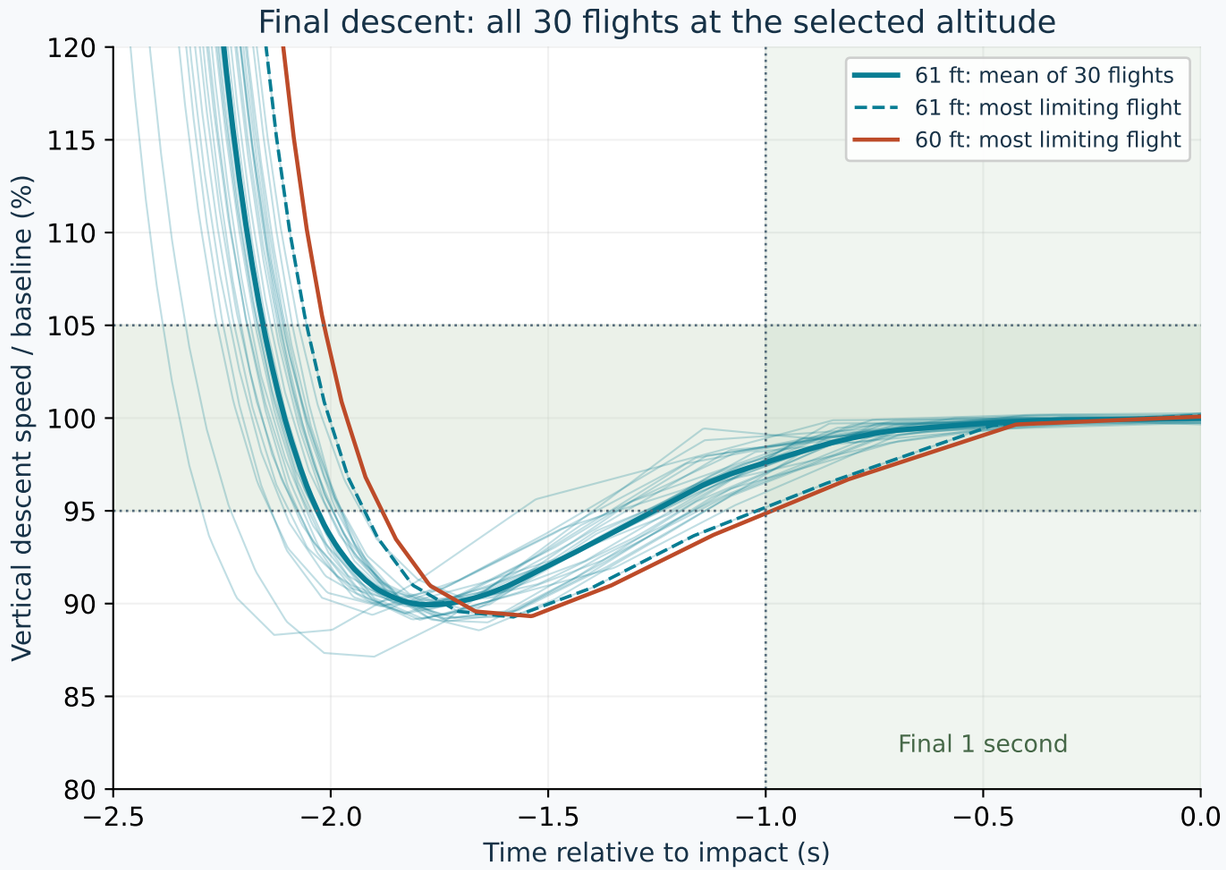

Minimum tested trigger: 61 ft (18.6 m) AGL · 30/30 flights settled

At 60 ft: 29/30 pass · Impact descent: 23.1 ± 0.5 ft/s · Altitude resolution: 1 ft

AGL is measured above the flat ground plane at the URRG launch pad. ± denotes sample standard deviation.

Simulation assumes immediate full parachute drag; canopy inflation time and opening-load failure are not modeled.