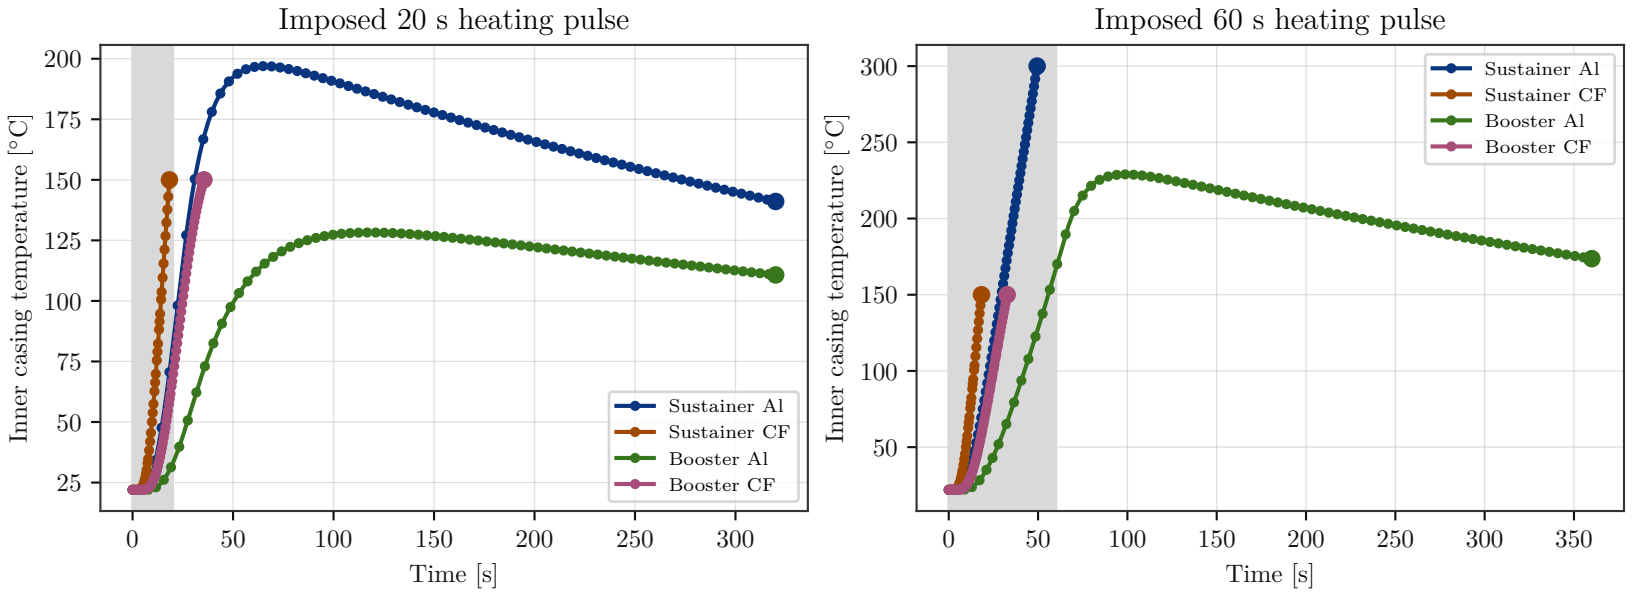

Imposed 20 s heating pulse
Inner casing temperature [°C]
Time [s]
Sustainer Al
Sustainer CF
Booster Al
Booster CF
Imposed 60 s heating pulse
Inner casing temperature [°C]
Time [s]
Sustainer Al
Sustainer CF
Booster Al
Booster CF