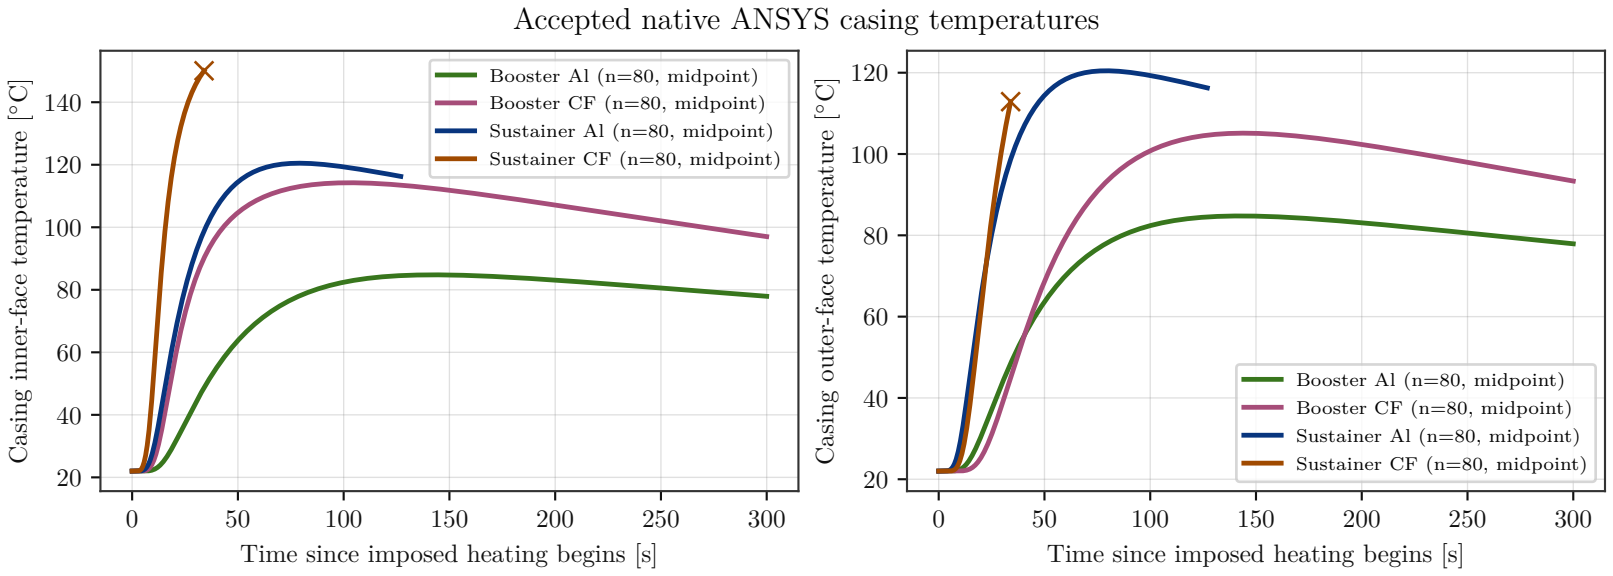

Accepted native ANSYS casing temperatures
Casing inner-face temperature [°C]
Time since imposed heating begins [s]
Booster Al (n=80, midpoint)
Booster CF (n=80, midpoint)
Sustainer Al (n=80, midpoint)
Sustainer CF (n=80, midpoint)
Casing outer-face temperature [°C]
Time since imposed heating begins [s]
Booster Al (n=80, midpoint)
Booster CF (n=80, midpoint)
Sustainer Al (n=80, midpoint)
Sustainer CF (n=80, midpoint)