

C Series



**UL Recognized
CSA Certified
VDE Approved**



C Series

Two function power entry module combining a DPST switch and an IEC 320 power line connector. Compact packaging allows a smaller panel cutout with choice of snap-in or flange mounting. Available with general purpose filtering (F models - CFS, CFE), medical application filtering (H models - CHS, CHE) or unfiltered (CS, CE). Terminals allow for easy connection to any wiring scheme. Preconnected terminals from line to switch are available (B Models - CBS, CBE) for reducing OEM wiring time.

The medical versions (H models) are designed specifically for health care applications. Their extremely low leakage current allows compliance with UL544 and UL2601 as well as CSA22.2 health care specifications for use with both patient and non-patient care equipment.

Specifications

Hipot rating (one minute):

line-to-ground	2250 VDC
line-to-line	1450 VDC

Operating frequency:

50/60 Hz

Rated voltage:

250 VAC

Rated current:

1-10A @120 VAC
1-10A @250 VAC

Operating voltages:

115/230 VAC

Switch:

Double-insulated rated
for 10,000 operations
at full load.
Amp inrush capability.

Unfiltered Push-on Force:

18 lb/80 N

Filtered models only:

Maximum leakage current, each line-to-ground

F Models	@ 120 VAC 60 Hz:	.25 mA
	@ 250 VAC 50 Hz:	.40 mA
H Models	@ 120 VAC 60 Hz:	2 μ A
	@ 250 VAC 50 Hz:	5 μ A

Minimum insertion loss in dB:

Line-to-ground in 50 ohm circuit

Current Rating	0.05	0.15	0.5	1	5	10	30
F Models							
1A	10	26	46	48	46	47	46
3A	8	16	32	36	43	48	50
6A	4	11	22	27	36	41	50
10A	1	4	14	18	27	33	42

Line-to-line in 50 ohm circuit

Current Rating	0.05	0.15	0.5	1	5	10	30
F Models							
1A	1	3	13	28	62	67	42
3A	2	6	14	23	65	65	67
6A	2	6	14	27	46	48	58
10A	1	7	14	23	42	44	62

Line-to-ground in 50 ohm circuit

Current Rating	0.05	0.15	0.5	1	5	10	30
H Models							
1A	16	21	37	44	26	21	10
3A	9	14	31	32	26	24	14
6A	4	10	22	23	19	18	13
10A	2	6	10	15	11	11	9


Line-to-line in 50 ohm circuit

Current Rating	0.05	0.15	0.5	1	5	10	30
H Models							
1A	1	6	13	29	38	42	26
3A	1	5	10	22	36	34	36
6A	1	5	14	20	31	33	37
10A	1	4	11	19	32	37	38


C Series

Case Styles


CS, CBS*

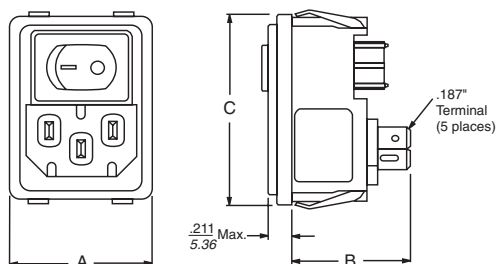

CFS, CHS

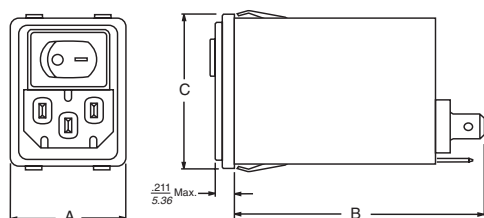


CE, CBE*

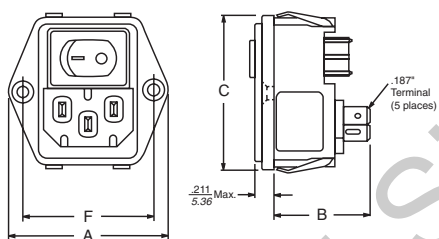


Mounting Holes: .13 [.33] Dia. (2) with .23 Dia. x 90° Counter sunk

CFE, CHE

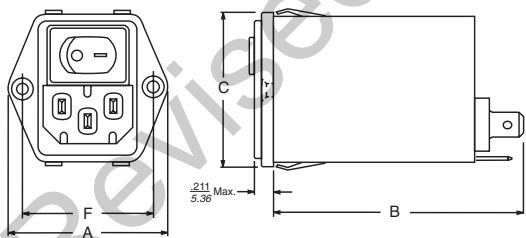

Mounting Holes: .13 [.33] Dia. (2) with .23 Dia. x 90° Counter sunk

*CBS, CBE Pre-Connected Terminals

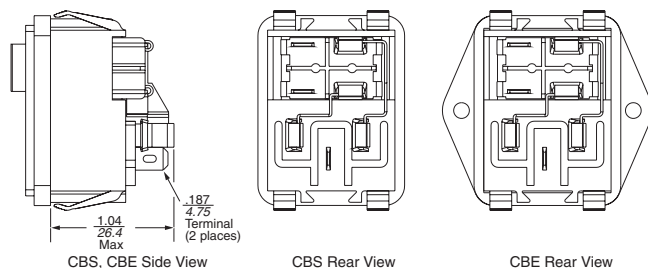


Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ±.006 ±.152	E ±.006 ±.152	F ±.006 ±.152
CS, CBS	1.23 31.24	.97 24.64	1.62 41.17	1.06 26.92	1.540 39.12	—
CE, CBE	1.74 44.2	.97 24.64	1.62 41.17	1.06 26.92	1.540 39.12	1.417 36.0
CFS, CHS	1.23 31.24	2.53 64.26	1.62 41.17	1.12 28.5	1.540 39.12	—
CFE, CHE	1.74 44.2	2.53 64.26	1.62 41.17	1.12 28.5	1.540 39.12	1.417 36.0

Part Numbers

10CS1	10CE1	1CHS1	1CHE1
1CFS1	1CFE1	3CHS1	3CHE1
3CFS1	3CFE1	6CHS1	6CHE1
6CFS1	6CFE1	10CHS1	10CHE1
10CFS1	10CFE1	10CBS1	10CBE1


Recommended Panel Cutout




Panel Cutout for thickness of .031-.098 [.8-2.5]. Not recommended for plastic panels.
For snap-in applications, the D sides of the cutout must have a .02 [.508] radius on the installation side. Snap-in models allow front mounting only.

Electrical Schematics


F Models (CFS, CFE)

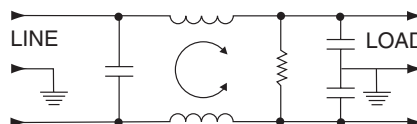

H Models (CHS, CHE)

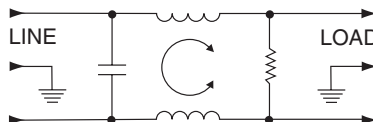

B Models (CBS, CBE)

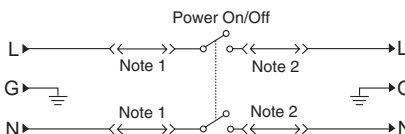

Note 1: Jumpers provided on CBS and CBE versions only.
Note 2: Location of optional filter

Resistor location for reference only.