

## Aim-11

11. To construct a WLAN and make the nodes communicate wirelessly

Topology:

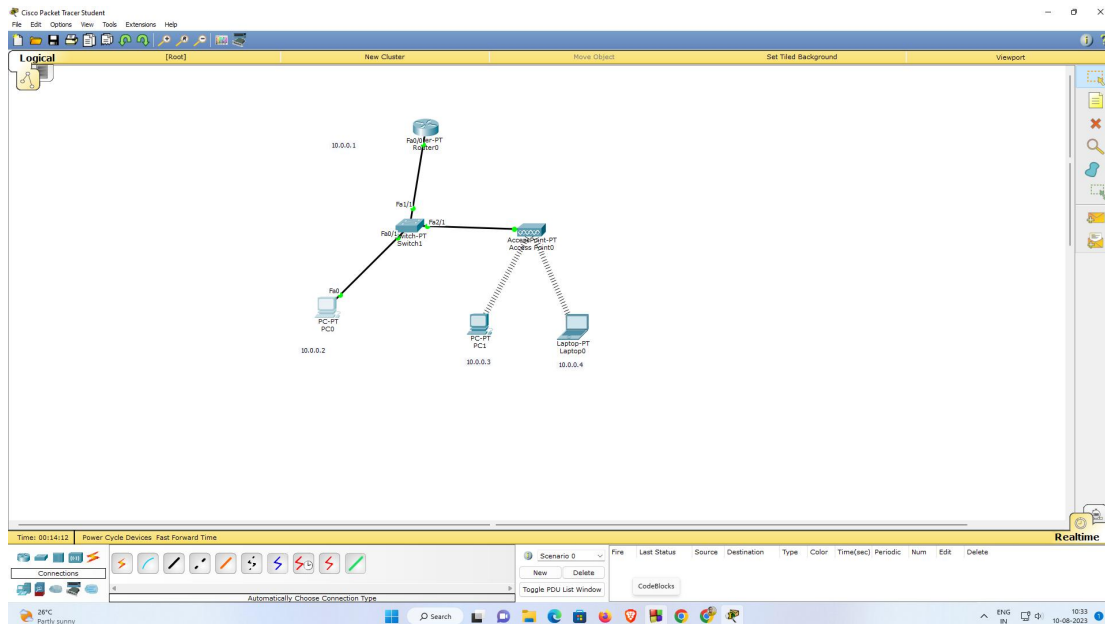


Fig 1: Topology

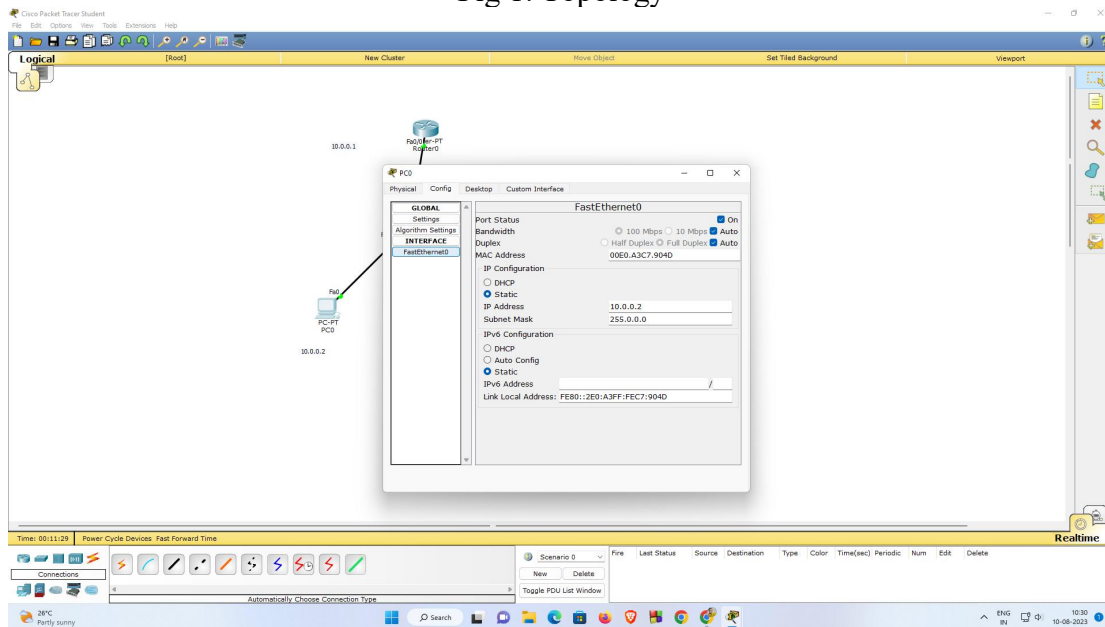


Fig 2: Pco configuration

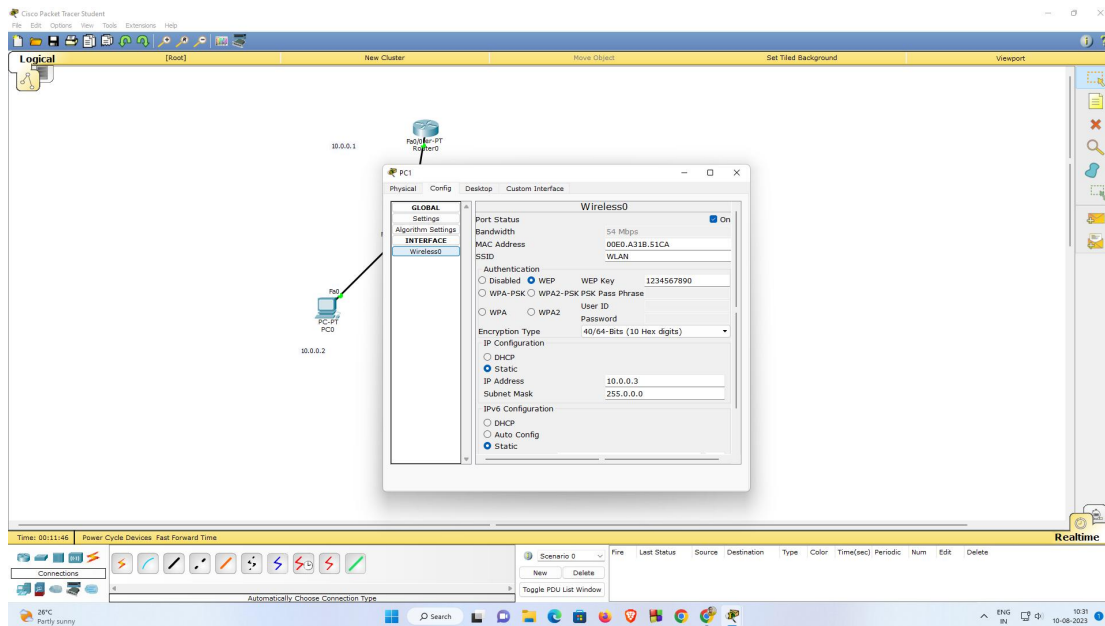


Fig 3: Pc1 configuration

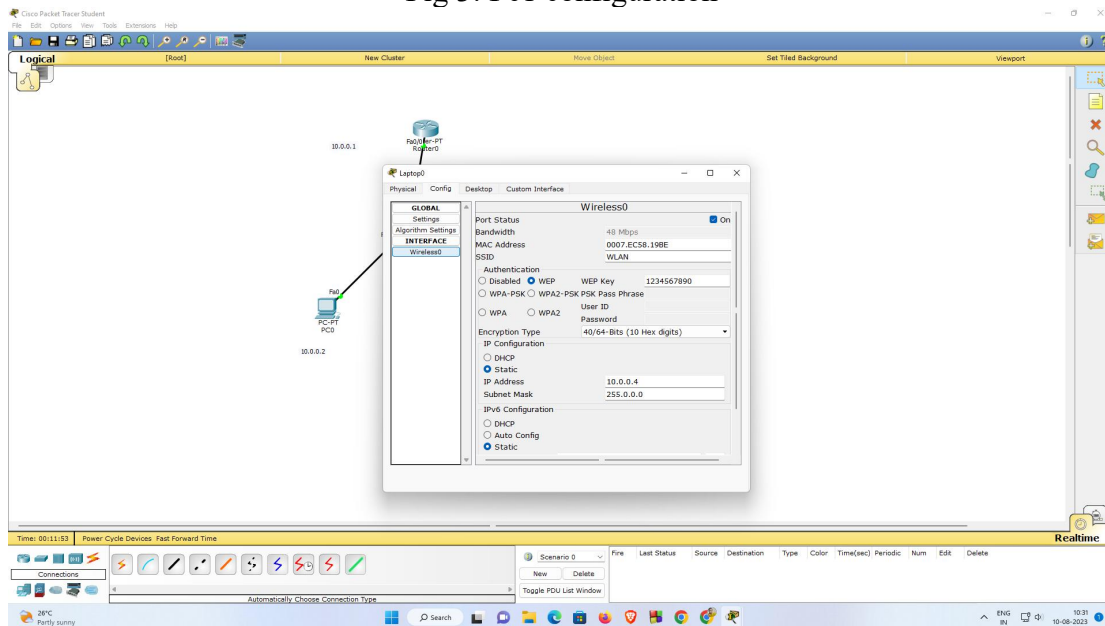


Fig 4: Laptop0 Configuration


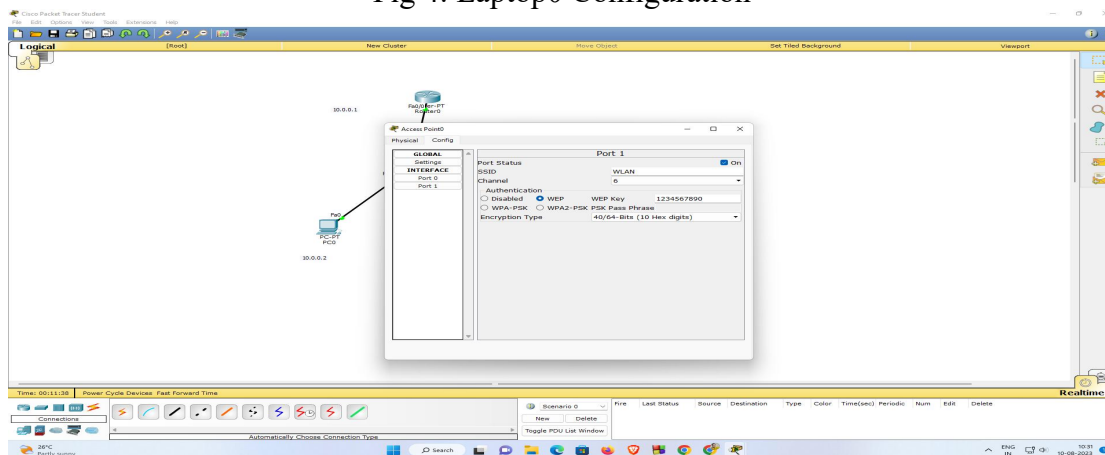



Fig 4: Access point0 Configuration

Output:

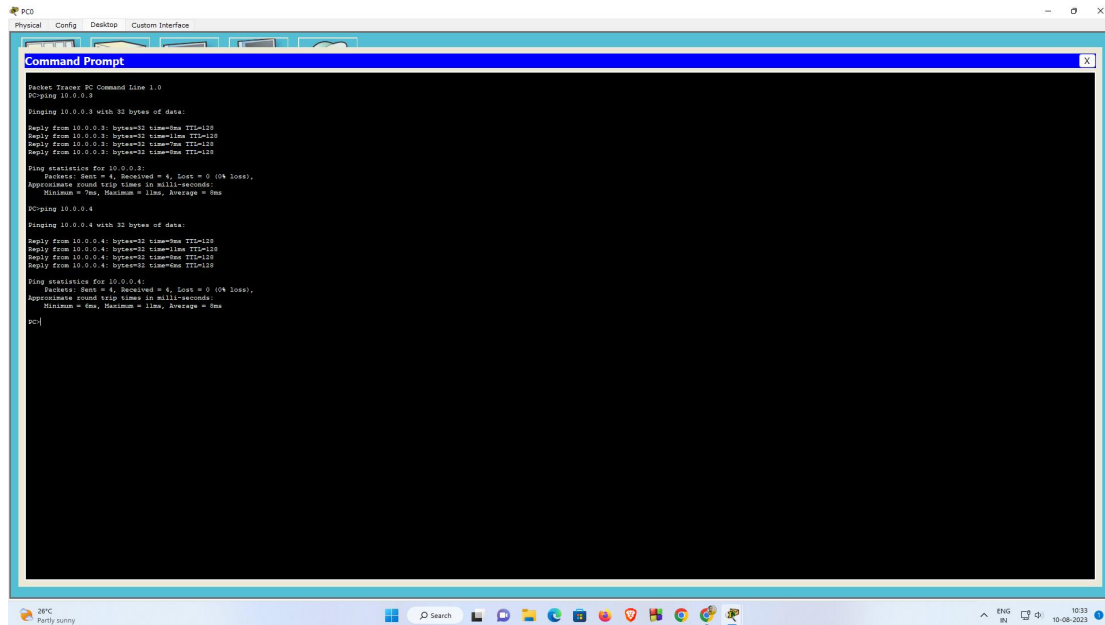

```
Packet Tracer PC Command Line 1.0
PC>
PC> Ping 10.0.0.3
Pinging 10.0.0.3 with 32 bytes of data:
Reply from 10.0.0.3: bytes=32 time=0ms TTL=128
Reply from 10.0.0.3: bytes=32 time=0ms TTL=128
Reply from 10.0.0.3: bytes=32 time=0ms TTL=128
Reply from 10.0.0.3: bytes=32 time=0ms TTL=128
Ping statistics for 10.0.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
PC> Ping 10.0.0.4
Pinging 10.0.0.4 with 32 bytes of data:
Reply from 10.0.0.4: bytes=32 time=0ms TTL=128
Reply from 10.0.0.4: bytes=32 time=0ms TTL=128
Reply from 10.0.0.4: bytes=32 time=0ms TTL=128
Reply from 10.0.0.4: bytes=32 time=0ms TTL=128
Ping statistics for 10.0.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
PC>
```

Fig 5: Ping responses from pc1 and laptop0

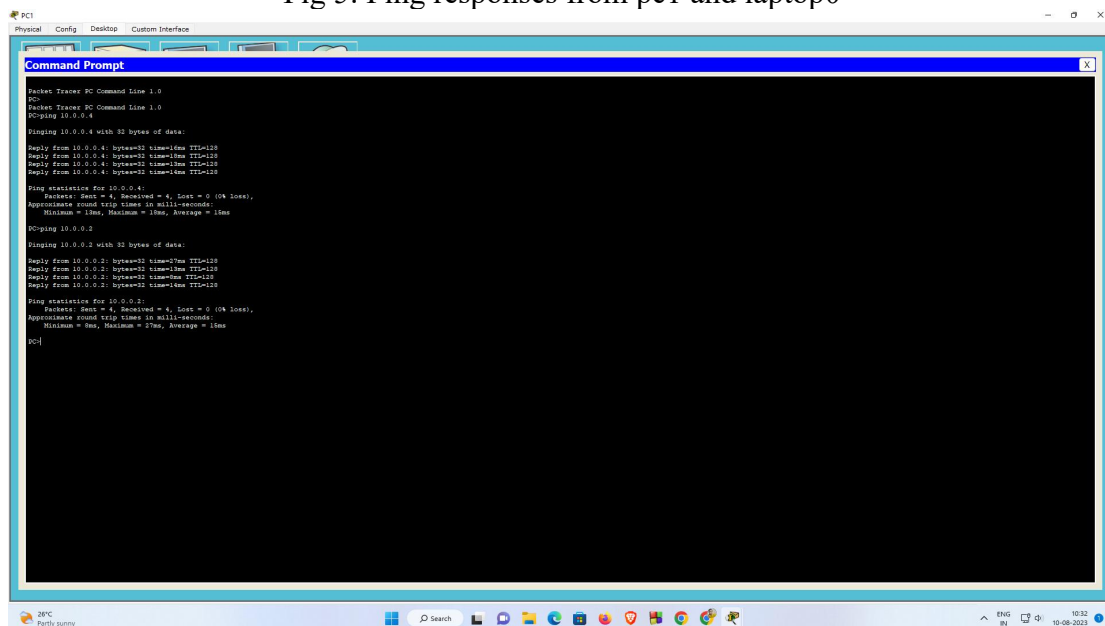

```
PC1
Packet Tracer PC Command Line 1.0
PC1>
PC1> Ping 10.0.0.4
Pinging 10.0.0.4 with 32 bytes of data:
Reply from 10.0.0.4: bytes=32 time=0ms TTL=128
Reply from 10.0.0.4: bytes=32 time=0ms TTL=128
Reply from 10.0.0.4: bytes=32 time=0ms TTL=128
Reply from 10.0.0.4: bytes=32 time=0ms TTL=128
Ping statistics for 10.0.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
PC1> Ping 10.0.0.2
Pinging 10.0.0.2 with 32 bytes of data:
Reply from 10.0.0.2: bytes=32 time=0ms TTL=128
Reply from 10.0.0.2: bytes=32 time=0ms TTL=128
Reply from 10.0.0.2: bytes=32 time=0ms TTL=128
Reply from 10.0.0.2: bytes=32 time=0ms TTL=128
Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
PC1>
```

Fig 6: Ping responses from pc0 and laptop0

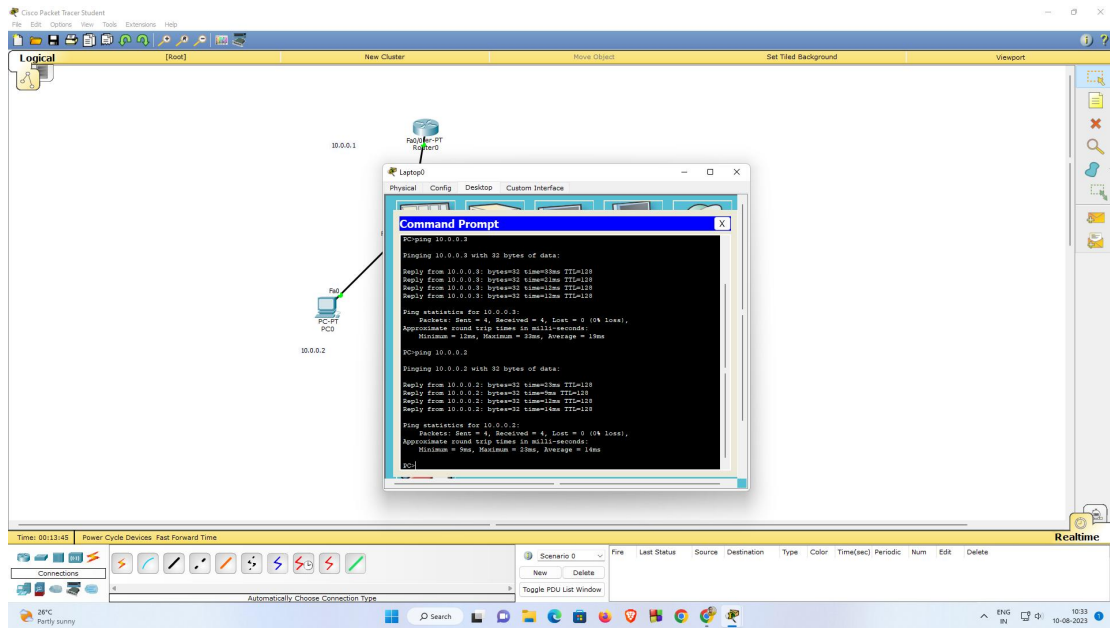


Fig 7: Ping responses from pc0 and pc1