

Pololu stepper driver board

From RepRapWiki

Please note: Pololu stepper driver boards has 0.05 ohm sense resistors instead of StepStick 0.2 ohm.



Pololu stepper driver board

A **Pololu stepper driver board** is a well known RepRap machine stepper motor driver.

Release status: working

The Pololu stepper driver boards are made as pluggable modules to a electronics motherboard. A good reason of this design is, that it is easy to exchange the Pololu boards when troubleshooting - or when a board has burned out.



Contents

- 1 List of Boards
 - 1.1 Alternatives
- 2 Tuning motor current
 - 2.1 A4988 and similar
 - 2.2 DRV8825
- 3 The maths in full
- 4 Heat Consideration
- 5 Upgrades
- 6 See also

Description	Stepper driver for RAMPS Sanguinololu, Gen7
License	Commercial
Author	Pololu
Contributors	
Based-on	A4988
Categories	Stepper motor drivers, Mendel Development

CAD Models

External Link	http://www.pololu.com/cat
----------------------	---

List of Boards

Pololu driver boards (8+8 pins):

- Pololu A4988 stepper driver (<http://www.pololu.com/catalog/product/1182>) - A4988-based; equivalent to A4983-board but offers overcurrent protection. If the boards get too hot, they will interrupt the current until it cools a bit. If the current is too high for the heat sinking, the motors will pulse as the current is interrupted and restored. See <http://forums.reprap.org/read.php?4,116813,116832,quote=1> and its video. Try reducing the current until the pulsing stops.
- Pololu A4983 stepper driver (<http://www.pololu.com/catalog/product/1201>) - A4983-based; (discontinued).

Pololu driver boards with Voltage Regulators (longer boards - 8+14 pins):

- Pololu A4988 Stepper Motor Driver Carrier with Voltage Regulators (<http://www.pololu.com/catalog/product/1183>) - A4988-based; equivalent to A4983-board but offers overcurrent protection.
- Pololu A4983 Stepper Motor Driver Carrier with Voltage Regulators (<http://www.pololu.com/catalog/product/1202>) - A4983-based; (discontinued).

As user Nophead has pointed out, that Pololu driver is a nice design, but with one big shortcoming: it will run hot, and is difficult to cool because it's so small. So what I've done is to design the electronics in such a way that they both perform their function and act as a physical duct for the flow from a fan to direct their own cooling. A happy side-effect of this is that the resulting PCBs are very simple, and can be made single-sided without any thin tracks. That is why RepRap itself can make them. We must walk before we can run... an another way to improve heat dissipation is the use of small heat sink, unfortunately the small adhesive

pad are not so adhesive.... so the use of some thermal conductive glue make the thing easier (like this one, in french www.pc-look.com/boutik/63648.html but if you google: Arctic Silver - Arctic Alumina™ Thermal Adhesive you will find it or equivalent)

Alternatives

- StepStick
- G3D driver
- SureStepr SD82B - http://www.panucatt.com/product_p/sd82b.htm
- DRV8825 Stepper driver (1.5 A max w/o heatsink! 2.2 with) - <http://www.pololu.com/catalog/product/2132>

Tuning motor current

A4988 and similar

Per the A4988 datasheet

(http://www.pololu.com/file/download/a4988_DMOS_microstepping_driver_with_translator.pdf?file_id=0J450) , the calculation for the maximum trip current is:

$$I_{TripMax} = V_{ref} / (8 * R_s)$$

With Pololus, the sensing resistors are $R_s=0.05$ ohm, so a V_{ref} of 0.4 should produce a maximum current of $0.4/(8*0.05)=1A$. Clockwise increases the current which will make the motor run hotter and counterclockwise reduces it which will cool it down (see forum thread 159081).

As another example, aiming for 50% temperature rise on 1A rated steppers by using max 0.7A, so rearrange it as:

$$V_{ref} = I_{TripMax} * 8 * R_s$$

or

$$V_{ref} = 0.7A * 8 * 0.05 = 0.280V$$

With a measured V_{ref} of 0.273V, I should expect 0.6825A, and I measured the current through one coil as 0.486A in full step mode, which should be 0.7071 of the full trip current, or $I_{TripMax} = 0.486/0.7071 = 0.687A$, which seems close enough.

The V_{ref} signal is accessible as the "VREF" pin on the carriers with voltage regulators, as the through-hole via on the carriers without, and also as the wiper on the trim pot itself on both carriers.

Note 1: for StepStick, the $R_s=0.2$ ohm, so you'd get 4 times the V_{ref} at the same current.

Note 2: most "Made in China" A4988 Pololu knock-offs have $R_s=0.1$ ohm.

DRV8825

For the Pololu DRV8825 Stepper Motor Driver (<http://www.pololu.com/product/2133>) , the current sense resistors are 0.1Ω . The calculation changes to " $I_{TripMax} = V_{ref} \times 2$ ", or " $V_{ref} = I_{TripMax} / 2$ ".

Note: Check pinout before placing driver, V_{ref} pot on the Pololu DRV8825 is usually on the opposite side of the board when compared to the Pololu A4988, placing driver backwards can destroy the driver.


$$V_{ref} = I_{TripMax} / 2$$

As an example, running at 70% of a maximum 1A motor current, use the formula as follows:

$$V_{ref} = 0.7A / 2 = 0.350V$$

The maths in full

For reprints, logic supply voltage (VDD) is 5V. For Pololu driver boards, the trimpot is 100kohm, R5 resistor is 20kohm, sense resistors R7 and R8 are 0.05ohm
 $V_{REF} \text{ max} =$

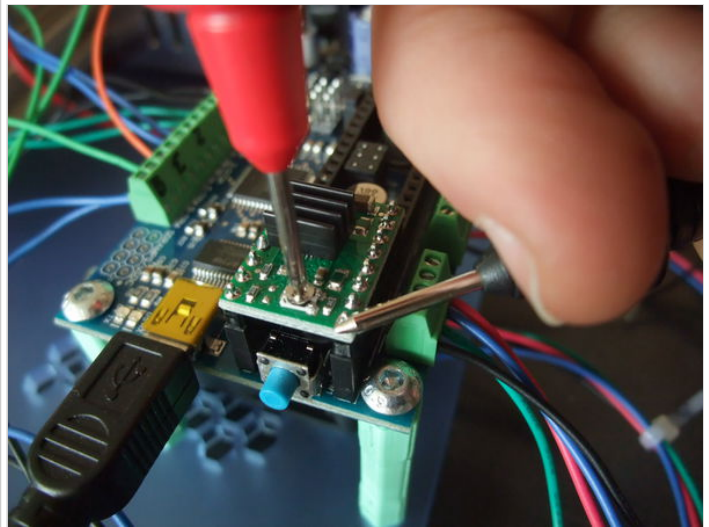

example of a v-ref checking, + probe on the turnpot and - on a ground pin

$$\left(\frac{\text{TrimpotMaxR}}{\text{TrimpotMaxR} + R5} \right) \times VDD = \left(\frac{100,000}{100,000 + 20,000} \right) \times 5 = 4.16V$$

$$I_{\text{TripMAX}} \text{ (effectively max motor current)} = V_{REF} / (8 \times \text{Sense_resistor}) = 4.16 / (8 \times 0.05) = 10.4A$$

To calculate amps from measured VREF: $A = V_{REF} / 0.4$

To calculate VREF required for a target current: $V_{REF} = A \times 0.4$

Heat Consideration

The way the IC is designed, it wicks heat much better through the large pad on the underside than it does through the outside of the packaging. This means the heatsink is not actually in the ideal place to wick heat away, and the quality of the solder job underneath is extra important. On some chinese knockoffs (white board and the pot has no built in stop) I notice they overheat and go into thermal shut down before a real pololu board would, even with a heat sink and fan. Heat dissipation could possibly be improved by re-flowing the solder on a hot plate, but I have not tried this as they are my backups. Pololu also offers a "black Edition" board which has extra copper and multiple layers in the PCB to help wick heat away from the IC and keep it cool. This is said to add on an extra 0.2 amps that can be maintained without heat sinking. Also using the same logic, it is more effective to blow cooling air under the board rather than over it, and brilliant design work on the RAMPS boards allows this quite easily.

Upgrades

By replacing one resistor on the driver board, the reference voltage becomes much easier to set. The resistor in question is to the right of the vref pot, if the pot is considered the bottom of the board.

The voltage divider and pot are poorly selected for the currents used. The board uses a 10k pot and 20k resistor to set the vref, so the effective range is 0-1.7 volts, or 0-4.2 amps! The IC is only rated for a maximum of two amps if you have perfect heat dissipation. This makes it much more difficult to set the ref voltage since at 1/4 turn you have maxed out your driver. The resistor is the easiest to change. You simply need to swap it with one rated at 51K ohms. (part number below) With this modification, the max current is 2.05 A with vRef = 0.82V.

Any resistor in a 0603 SMD package will work. Resistors with a higher resistance will lower the maximum current even further. Some have reported using a 68K-ohm resistor which brings the maximum current down to 1.6 amps. Many of the Pololu clones will shut down before producing this much current, even when cooled with a heatsink and fan, so a slightly higher resistance would work as well.


51K-ohm DigiKey.com part number: 311-51KGRCT-ND

Double check the sense resistor values before making this upgrade, if you actually have stepsticks with 0.2ohm resistors, this is not needed.

See also

- StepStick
- G3D driver

Retrieved from
"http://reprap.org/mediawiki/index.php?"

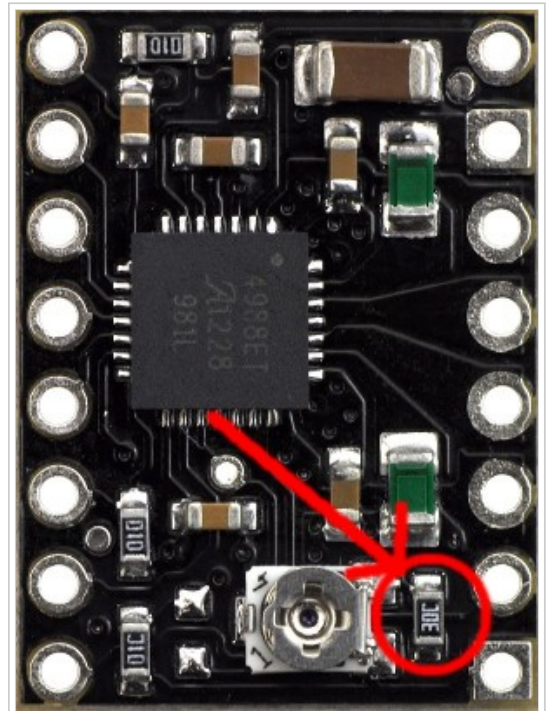

Replace this resistor

title=Pololu_stepper_driver_board&oldid=151376"

Categories: Working developments | Stepper motor drivers | Mendel Development
| Pololu electronics

-
- This page was last modified on 17 July 2015, at 11:18.
 - Content is available under GNU Free Documentation License 1.2.