MAGNETIC FUSION ENERGY FORMULARY

ZACHARY S HARTWIG

MIT Plasma Science and Fusion Center

Yuri A Podpaly

National Institute of Standards and Technology

REVISION: February 2014

Preface

The guiding principle behind the MFE formulary (the "Formulary" hereafter) is to provide a comprehensive reference for students and researchers working in the field of magnetic confinement fusion. It is a product of the authors' frustration with searching dozens of textbooks while studying for the MIT doctoral qualifying exams.

The Formulary consists of three broad sections. Chapters 1–2 cover the mathematics, fundamental units, and physical constants relevent to magnetic fusion. Chapters 3–9 cover the basic physics of thermonuclear fusion plasmas, beginning with electrodynamics as a foundation and developing single particle physics, plasma parameters, plasma models, plasma transport, plasma waves, and nuclear physics. Chapters 10–13 cover the physics of toroidally confined plasmas, the fundamentals of magnetic fusion energy, and the parameters for the major magnetic fusion devices of the world.

Much of the content of the Formulary has been derived from an original source, such as peer-reviewed literature, evaluated nuclear data tables, or the pantheon of "standard" mathematics and physics textbooks commonly used in magnetic fusion energy. References are given immediately following the cited item in superscript form as "a:b", where "a" is the citation number of the reference and "b" is the page number. Full bibliographic entries for all references may be found at the end of the formulary. In addition to providing transparency, this unique feature transforms the Formulary into a gateway to a deeper understanding of the critical equations, derivations, and physics for magnetic fusion energy.

Ultimately, we hope that this work is useful to all those trying to make magnetic fusion energy a reality.

Z & Y

Information

The following sections contain important information regarding the development, use, and distribution of the MFE Formulary. The most up-to-date contact information for the authors of the MFE Formulary is:

• Email: mfe_formulary@mit.edu

• Web: http://www.psfc.mit.edu/research/MFEFormulary

• GitHub: https://github.com/MFEFormulary/MFEFormulary

Licensing

The Formulary has been released under open source licenses in order to maximize its distribution and utility to the plasma physics and magnetic fusion communities. The hardcopy printed book and digital PDF format have been released under the Creative Commons SA 4.0 license. The LaTex source code and build system has been released under the GNU GPL v3.0 and is freely available from our GitHub repository on the web. Both licenses permit copying, redistributing, modifying, and deriving new works under the aforementioned license. You are encouraged to distribute this document as widely as possible under the terms provided in the license above. You are also encouraged to fork or clone our GitHub repository, make your own contributions to the LaTeX codebase, and submit a pull request for inclusion of your contribution to the Formulary. (Email to works as well.) Finally, you are welcome to use any part of the hardcopy or electronic copy of the Formulary or its LaTeX code in your own projects under the terms of the licenses above.

Contributors

The following is a list of people who have contributed their time, effort, and expertise. Their contributions have been critical to continually improving the accuracy and content of the Formulary. Please consider contributing your expertise either through our GitHub repository or email!

• Michael Bongard

• Mark Chilenski

• Dan Brunner

• Samual Cohen

- Luis Delgado-Aparicio
- Chi Gao
- Greg Hammett

- Alex Tronchin-James
- Anne White
- Dennis Whyte

Disclaimer

The MFE formulary is by no means complete or error-free. In fact, the statistical laws of the universe essentially guarantee that it has grievous errors and glaring omissions. Thus, we welcome suggestions for additional material, improvements in layout or usability, and corrections to the pesky errors and typos we have tried so hard to eliminate. Even better, we encourage you to obtain the source code from our GitHub repository (see above), make the corrections, and then submit them to us via pull request. You can also reach us by email (see above).

Despite vigorous proofreading, no guarantee is provided by the authors as to the acuracy of the material in the MFE Formulary. The authors shall have no liability for direct, indirect, or other undesirable consequences of any character that may result from the use of the material in this work. This may include, but is not limited to, your analysis code not working or your tokamak not igniting. By your use of the Formulary and its contents, you implicitly agree to absolve the authors of liability. The reader is encouraged to consult the original references in all cases and is advised that the use of the materials in this work is at his or her own risk.

Acknowledgments

The authors would like to thank Dan Brunner, Chi Gao, Christian Haakonsen, Dr. John Rice, Prof. Anne White, Prof. Dennis Whyte (all of MIT), and Dr. Samuel Cohen (PPPL) for their encouragement, feedback, and proofreading. We would also like thank Heather Barry, Prof. Richard Lester, and Prof. Miklos Porkolab of MIT for their support.

During the writing of the Formulary, the authors were at various times supported by the following funding agencies, to which we would like to extend our gratitude: the MIT Department of Nuclear Science and Engineering, the MIT Plasma Science and Fusion Center, U.S DoE Grant DE-FG02-94ER54235, U.S. DoE Cooperative Agreement DE-FC02-99ER54512, and U.S. ORISE Fusion Energy Sciences Program.

Contents

P	refac	e	1
In	form	nation	3
1	Ma	thematics	9
	1.1	Vector Identities	9
	1.2	Curvilinear Coordinate Systems	10
	1.3	Integral Relations of Vector Calculus	12
	1.4	Legendre Polynomials	13
	1.5	Bessel Functions	13
	1.6	Modified Bessel Functions	14
	1.7	Partial Differential Equations	16
	1.8	Gaussian Integrals	18
	1.9	Error functions	18
2	Fun	ndamental Constants and SI Units	2 1
3	Ele	ctricity and Magnetism	25
	3.1	Electromagnetic in Vacuum	25
	3.2	Electromagnetics in Matter	27
	3.3	Dipoles	27
	3.4	Circuit Electrodynamics	28
	3.5	Conservation Laws	29
	3.6	Electromagnetic Waves	29
	3.7	Electrodynamics	32
4	Sin	gle Particle Physics	35
	4.1	Single Particle Motion in ${\bf E}$ and ${\bf B}$ Fields $\ldots \ldots \ldots$	35
	4.2	Binary Coulomb Collisions	37
	4.3	Single Particle Collisions with Plasma	38
	4.4	Particle Beam Collisions with Plasmas	40
5	Pla	sma Parameters and Definitions	43
	5.1	Single Particle Parameters	43
	5.2	Plasma Parameters	44
	5.3	Plasma Speeds	45
	5.4	Fundamentals of Maxwellian Plasmas	45
	5.5	Definition of a Magnetic Fusion Plasma	46
	5.6	Fundamental Plasma Definitions	47

6 CONTENTS

6	Plas	sma Models	49
	6.1	Kinetic	49
	6.2	Two Fluids	50
	6.3	One Fluid	52
	6.4	Magnetohydrodynamics (MHD)	53
	6.5	MHD Equilibria	54
	6.6	Grad-Shafranov Equation	54
	6.7	MHD Stability	54
	6.8	Stability of the Screw Pinch	56
7	Trai	nsport	5 9
	7.1	Classical Transport	59
	7.2	Neoclassical Transport	62
8	Plas	sma Waves	65
	8.1	Cold Plasma Electromagnetic Waves	65
	8.2	Electrostatic Waves	67
	8.3	MHD Waves	68
	8.4	Hot Plasma	68
9	Nuc	elear Physics	73
	9.1	Fundamental Definitions	73
	9.2	Nuclear Interactions	74
	9.3	Cross Section Theory	76
	9.4	Reaction Rate Theory	77
	9.5	Nuclear Reactions for Fusion Plasmas	78
	9.6	Nuclear Reactions for Fusion Energy	78
	9.7	Fusion Cross Section Parametrization	79
	9.8	Fusion Reaction Rate Parametrization	80
	9.9	Cross Section and Reaction Rate Plots	81
10		v	83
	10.1	Fundamental Definitions	83
		Magnetic Topology	85
		Magnetic Inductance	86
	10.4	Toroidal Force Balance	86
	10.5	Plasma Para- and Dia-Magnetism	87
	10.6	MHD Stability Limits	88
		Tokamak Heating and Current Drive	88
	10.8	Empirical Scaling Laws	90
	10.9	Turbulence	91
11	Tok	amak Edge Physics	97
	11.1	The Simple Scrape Off Layer (SOL)	97
		Bohm Criterion	98
	11.3	A Simple Two Point Model For Diverted SOLs	99
12	Tok	amak Fusion Power 1	01
	19 1	Definitions	01

CONTENTS	7
701(1E1(1)	•

12.2 Power Balance in a D-T Fusion Reactor	
13 Tokamaks of the World	105
References	110
Index	111

8 CONTENTS

Chapter 1

Mathematics

 $\mathbf{A}, \mathbf{B}, \ldots$, are vector functions \mathbf{T} is a tensor ψ and ξ are scalar functions σ and τ refer to surfaces and volumes, respectively $d\boldsymbol{\sigma}$ is a differential surface element pointing away from the volume $d\tau$ is a differential volume element $d\boldsymbol{r}$ is a differential line element

1.1 Vector Identities

1.1.1 Identities Involving Only Vectors ^{12:4}

(a)
$$\mathbf{A} \cdot \mathbf{B} \times \mathbf{C} = \mathbf{A} \times \mathbf{B} \cdot \mathbf{C} = \mathbf{B} \cdot \mathbf{C} \times \mathbf{A}$$

(b)
$$\mathbf{A} \times (\mathbf{B} \times \mathbf{C}) = (\mathbf{C} \times \mathbf{B}) \times \mathbf{A} = \mathbf{B}(\mathbf{A} \cdot \mathbf{C}) - \mathbf{C}(\mathbf{A} \cdot \mathbf{B})$$

(c)
$$(\mathbf{A} \times \mathbf{B}) \cdot (\mathbf{C} \times \mathbf{D}) = (\mathbf{A} \cdot \mathbf{C})(\mathbf{B} \cdot \mathbf{D}) - (\mathbf{A} \cdot \mathbf{D})(\mathbf{B} \cdot \mathbf{C})$$

(d)
$$(\mathbf{A} \times \mathbf{B}) \times (\mathbf{C} \times \mathbf{D}) = \mathbf{C}(\mathbf{A} \times \mathbf{B} \cdot \mathbf{D}) - \mathbf{D}(\mathbf{A} \times \mathbf{B} \cdot \mathbf{C})$$

1.1.2 Identities Involving ∇ 12:4 10

(a)
$$\nabla \cdot (\psi \mathbf{A}) = \psi(\nabla \cdot \mathbf{A}) + \mathbf{A} \cdot (\nabla \psi)$$

(b)
$$\nabla \times (\psi \mathbf{A}) = \psi(\nabla \times \mathbf{A}) - \mathbf{A} \times (\nabla \psi)$$

(c)
$$\nabla \cdot (\mathbf{A} \times \mathbf{B}) = \mathbf{B} \cdot (\nabla \times \mathbf{A}) - \mathbf{A} \cdot (\nabla \times \mathbf{B})$$

(d)
$$\nabla \times (\mathbf{A} \times \mathbf{B}) = (\mathbf{B} \cdot \nabla)\mathbf{A} - (\mathbf{A} \cdot \nabla)\mathbf{B} + \mathbf{A}(\nabla \cdot \mathbf{B}) - \mathbf{B}(\nabla \cdot \mathbf{A})$$

(e)
$$\nabla (\mathbf{A} \cdot \mathbf{B}) = \mathbf{A} \times (\nabla \times \mathbf{B}) + \mathbf{B} \times (\nabla \times \mathbf{A}) + (\mathbf{A} \cdot \nabla)\mathbf{B} + (\mathbf{B} \cdot \nabla)\mathbf{A}$$

(f)
$$\nabla \cdot (\mathbf{A}\mathbf{B}) = (\nabla \cdot \mathbf{A})\mathbf{B} + (\mathbf{A} \cdot \nabla)\mathbf{B}$$

(g)
$$\nabla \cdot (\psi \overleftarrow{\mathbf{T}}) = \nabla \psi \cdot \overleftarrow{\mathbf{T}} + \psi \nabla \cdot \overleftarrow{\mathbf{T}}$$

(h)
$$\nabla \cdot (\nabla \times \mathbf{A}) = 0$$

(i)
$$\nabla^2 \mathbf{A} = \nabla(\nabla \cdot \mathbf{A}) - \nabla \times \nabla \times \mathbf{A}$$

(j)
$$\nabla(\psi\xi) = \nabla(\phi\xi) = \psi\nabla\xi + \xi\nabla\psi$$

(k)
$$\nabla \cdot (\nabla \psi \times \nabla \xi) = 0$$

(1)
$$\nabla \cdot \nabla \psi = \nabla^2 \psi$$

(m)
$$\nabla \times \nabla \psi = 0$$

1.1.3 Identities Involving $\int_{0.01}^{0.01} 12.5$

(a)
$$\int_{volume} \nabla \psi \, d\tau = \int_{surface} \psi \, d\boldsymbol{\sigma}$$

(b)
$$\int_{volume} \nabla \times \mathbf{A} \, d\tau = \oint_{surface} d\boldsymbol{\sigma} \times \mathbf{A}$$

(c)
$$\int_{surface} d\boldsymbol{\sigma} \cdot \nabla \times \mathbf{A} = \oint_{boundary} d\boldsymbol{r} \cdot \mathbf{A}$$

(d)
$$\oint_{boundary} d\mathbf{r} \times \mathbf{A} = \int_{surface} (d\boldsymbol{\sigma} \times \nabla) \times \mathbf{A}$$

1.2 Curvilinear Coordinate Systems

1.2.1 Cylindrical Coordinates (r, θ, z) 12:6-7 10

Differential volume: $d\tau = r dr d\theta dz$

Relation to cartesian coordinates:

$$x = r \cos \theta$$
 $\hat{x} = \cos \phi \, \hat{r} - \sin \phi \, \hat{\phi}$
 $y = r \sin \theta$ $\hat{y} = \sin \phi \, \hat{r} + \cos \phi \, \hat{\phi}$
 $z = z$ $\hat{z} = \hat{z}$

Unit vector differentials

$$\frac{d\hat{r}}{dt} = \hat{\theta} \frac{d\theta}{dt} \qquad \frac{d\hat{\theta}}{dt} = -\hat{r} \frac{d\theta}{dt}$$

Gradient

$$\nabla \psi = \frac{\partial \psi}{\partial r} \hat{\boldsymbol{r}} + \frac{1}{r} \frac{\partial \psi}{\partial \theta} \hat{\boldsymbol{\theta}} + \frac{\partial \psi}{\partial z} \hat{\boldsymbol{z}}$$

Divergence

$$\nabla \cdot \mathbf{A} = \frac{1}{r} \frac{\partial}{\partial r} (rA_r) + \frac{1}{r} \frac{\partial A_{\theta}}{\partial \theta} + \frac{\partial A_z}{\partial z}$$

Curl

$$\nabla \times \mathbf{A} = \left(\frac{1}{r} \frac{\partial A_z}{\partial \theta} - \frac{\partial A_{\theta}}{\partial z}\right) \hat{\mathbf{r}}$$

$$+ \left(\frac{\partial A_r}{\partial z} - \frac{\partial A_z}{\partial r}\right) \hat{\mathbf{\theta}}$$

$$+ \left(\frac{1}{r} \frac{\partial}{\partial r} (rA_{\theta}) - \frac{1}{r} \frac{\partial A_r}{\partial \theta}\right) \hat{\mathbf{z}}$$

Laplacian

$$\nabla^2 \psi = \frac{1}{r} \frac{\partial}{\partial r} \left(r \frac{\partial \psi}{\partial r} \right) + \frac{1}{r^2} \frac{\partial^2 \psi}{\partial \theta^2} + \frac{\partial^2 \psi}{\partial z^2}$$

Vector-dot-grad

$$(\mathbf{A} \cdot \nabla) \mathbf{B} = \left(A_r \frac{\partial B_r}{\partial r} + \frac{A_\theta}{r} \frac{\partial B_r}{\partial \theta} + A_z \frac{\partial B_r}{\partial z} - \frac{A_\theta B_\theta}{r} \right) \hat{\mathbf{r}}$$

$$+ \left(A_r \frac{\partial B_\theta}{\partial r} + \frac{A_\theta}{r} \frac{\partial B_\theta}{\partial \theta} + A_z \frac{\partial B_\theta}{\partial z} + \frac{A_\theta B_r}{r} \right) \hat{\mathbf{\theta}}$$

$$+ \left(A_r \frac{\partial B_z}{\partial r} + \frac{A_\theta}{r} \frac{\partial B_z}{\partial \theta} + A_z \frac{\partial B_z}{\partial z} \right) \hat{\mathbf{z}}$$

1.2.2 Spherical Coordinates (r, θ, ϕ) 12:8-9 10

Differential volume: $d\tau = r^2 \sin \theta \, dr \, d\theta \, d\phi$

Relation to cartesian coordinates

$$x = r \sin \theta \cos \phi \qquad \hat{x} = \sin \theta \cos \phi \, \hat{r} + \cos \theta \cos \phi \, \hat{\theta} - \sin \phi \, \hat{\phi}$$

$$y = r \sin \theta \sin \phi \qquad \hat{y} = \sin \theta \sin \phi \, \hat{r} + \cos \theta \sin \phi \, \hat{\theta} + \cos \phi \, \hat{\phi}$$

$$z = r \cos \theta \qquad \hat{z} = \cos \theta \, \hat{r} - \sin \theta \, \hat{\theta}$$

Gradient

$$\nabla \psi = \frac{\partial \psi}{\partial r} \hat{\boldsymbol{r}} + \frac{1}{r} \frac{\partial \psi}{\partial \theta} \hat{\boldsymbol{\theta}} + \frac{1}{r \sin \theta} \frac{\partial \psi}{\partial \phi} \hat{\boldsymbol{\phi}}$$

Divergence

$$\nabla \cdot \mathbf{A} = \frac{1}{r^2} \frac{\partial}{\partial r} \left(r^2 A_r \right) + \frac{1}{r \sin \theta} \frac{\partial}{\partial \theta} \left(\sin \theta A_\theta \right) + \frac{1}{r \sin \theta} \frac{\partial A_\phi}{\partial \phi}$$

Curl

$$\nabla \times \mathbf{A} = \left(\frac{1}{r \sin \theta} \frac{\partial}{\partial \theta} (\sin \theta A_{\phi}) - \frac{1}{r \sin \theta} \frac{\partial A_{\theta}}{\partial \phi}\right) \hat{\mathbf{r}}$$
$$+ \left(\frac{1}{r \sin \theta} \frac{\partial A_r}{\partial \phi} - \frac{1}{r} \frac{\partial}{\partial r} (r A_{\phi})\right) \hat{\mathbf{\theta}}$$
$$+ \left(\frac{1}{r} \frac{\partial}{\partial r} (r A_{\theta}) - \frac{1}{r} \frac{\partial A_r}{\partial \theta}\right) \hat{\mathbf{\phi}}$$

Laplacian

$$\nabla^2 \psi = \frac{1}{r^2} \frac{\partial}{\partial r} \left(r^2 \frac{\partial \psi}{\partial r} \right) + \frac{1}{r^2 \sin \theta} \frac{\partial}{\partial \theta} \left(\sin \theta \frac{\partial \psi}{\partial \theta} \right) + \frac{1}{r^2 \sin^2 \theta} \frac{\partial^2 \psi}{\partial \phi^2}$$

Vector-dot-grad

$$(\mathbf{A} \cdot \nabla) \mathbf{B} = \left(A_r \frac{\partial B_r}{\partial r} + \frac{A_{\theta}}{r} \frac{\partial B_r}{\partial \theta} + \frac{A_{\phi}}{r \sin \theta} \frac{\partial B_r}{\partial \phi} - \frac{A_{\theta} B_{\theta} + A_{\phi} B_{\phi}}{r} \right) \hat{\mathbf{r}}$$

$$+ \left(A_r \frac{\partial B_{\theta}}{\partial r} + \frac{A_{\theta}}{r} \frac{\partial B_{\theta}}{\partial \theta} + \frac{A_{\phi}}{r \sin \theta} \frac{\partial B_{\theta}}{\partial \phi} + \frac{A_{\theta} B_r}{r} - \frac{\cot \theta A_{\phi} B_{\phi}}{r} \right) \hat{\boldsymbol{\theta}}$$

$$+ \left(A_r \frac{\partial B_{\phi}}{\partial r} + \frac{A_{\theta}}{r} \frac{\partial B_{\phi}}{\partial \theta} + \frac{A_{\phi}}{r \sin \theta} \frac{\partial B_{\phi}}{\partial \phi} + \frac{A_{\phi} B_r}{r} + \frac{\cot \theta A_{\phi} B_{\theta}}{r} \right) \hat{\boldsymbol{\phi}}$$

1.3 Integral Relations of Vector Calculus

In this section, let $\mathbf{A} \equiv \mathbf{A}(\mathbf{x}_i, \mathbf{x}_j, \mathbf{x}_k)$ be a vector function that defines a vector field.

1.3.1 The Fundamental Theorem of Calculus

If f(x) is a single-valued function on the interval [a,b] ^{14:88}

$$\int_{a}^{b} f(x)dx = F(b) - F(a)$$

1.3.2 Gauss's (or the Divergence) Theorem

If τ is a volume enclosed by a surface σ , where $d\sigma = \hat{n}d\sigma$ and \hat{n} is a unit vector pointing away from $\tau^{10:31}$

$$\int_{volume} (\nabla \cdot \mathbf{A}) \ d\tau = \oint_{surface} \mathbf{A} \cdot \mathbf{d}\boldsymbol{\sigma}$$

1.3.3 Stoke's (or the Curl) Theorem

If σ is an open surface defined by a boundary contour at the surface edge $_{10:34}$

$$\int_{contour} (\nabla \times \mathbf{A}) \cdot \mathbf{d}\boldsymbol{\sigma} = \oint_{contour} \mathbf{A} \cdot d\mathbf{r}$$

1.4 Legendre Polynomials

Legendre's equation $^{14:337}$

$$(1-x^2)\frac{d^2y}{dx^2} - 2x\frac{dy}{dx} + l(l+1)y = 0$$
 $-1 \le x \le 1$ and $l = 0, 1, 2, \cdots$

Legendre Polynomials 14:289

Order Corresponding polynomial

$$l = 0 P_0(x) = 1$$

$$l = 1 P_1(x) = x$$

$$l = 2 P_2(x) = \frac{1}{2}(3x^2 - 1)$$

$$l = 3 P_3(x) = \frac{1}{2}(5x^3 - 3x)$$

$$l = 4 P_4(x) = \frac{1}{8}(35x^4 - 30x^2 + 3)$$

$$l = 5 P_5(x) = \frac{1}{8}(63x^5 - 70x^3 + 15x)$$
...

Rodrigues' formula 14:286

$$P_l(x) = \frac{1}{2^l l!} \frac{d^l}{dx^l} (x^2 - 1)^l$$

Orthonormality 14:286

$$\int_{-1}^{1} P_l(x) P_m(x) dx = \int_{0}^{\pi} P_l(\cos \theta) P_m(\cos \theta) \sin \theta d\theta = \frac{2}{2l+1} \delta_{lm}$$

where δ_{lm} is the Kronecker delta: $l=m, \delta_{lm}=1; l\neq m, \delta_{lm}=0.$

1.5 Bessel Functions

1.5.1 Bessel's Equation

The most general form of Bessel's equation is ^{14:269}

$$\frac{d^2y}{dx^2} + \frac{1}{x}\frac{dy}{dx} + \left(\lambda^2 - \frac{p^2}{x^2}\right)y = 0$$

which has the general solution ^{14:270}

$$y = AJ_n(\lambda x) + BY_n(\lambda x)$$

where J_p are Bessel functions of the first kind and Y_p are Bessel functions of the second kind (also known as Neumann Functions N_p), both of order p. Bessel functions of the first kind have no closed form representation;

however, they can be used to define Bessel functions of the second kind: 14:270

$$Y_p(x) = \frac{J_p(x)\cos(p\pi) - J_{-p}(x)}{\sin(p\pi)}$$

1.5.2 Bessel Function Relations

The following relationships are also valid for $Y_p(x)$ by replacing $J_p(x)$ with $Y_p(x)$ ^{14: 278–279}

(a)
$$J_2(x) = \frac{2}{x}J_1(x) - J_0(x)$$

(b)
$$\frac{d}{dx}[J_0(x)] = -J_1(x)$$

(c)
$$\frac{d}{dx}[x^p J_p(x)] = x^p J_{p-1}(x)$$

(d)
$$\frac{d}{dx}[x^{-p}J_p(x)] = -x^{-p}J_{p+1}(x)$$

(e)
$$J_{p-1}(x) + J_{p+1}(x) = \frac{2p}{x} J_p(x)$$

(f)
$$J_{p-1}(x) - J_{p+1}(x) = 2\frac{d}{dx}J_p(x)$$

(g)
$$\frac{d}{dx}J_p(x) = -\frac{p}{x}J_p(x) + J_{p-1}(x) = \frac{p}{x}J_p(x) - J_{p+1}(x)$$

1.5.3 Asymptotic forms of Bessel Functions

For $x \to \infty^{14:273}$

$$J_p(x) \approx \sqrt{\frac{2}{\pi x}} \left[\cos \left(x - \frac{1}{2} p \pi - \frac{1}{4} \pi \right) \right]$$

$$Y_p(x) \approx \sqrt{\frac{2}{\pi x}} \left[\sin \left(x - \frac{1}{2} p \pi - \frac{1}{4} \pi \right) \right]$$

For $p \to \infty$ ^{14:273}


$$J_p(x) \approx \frac{1}{\sqrt{2\pi p}} \left(\frac{ex}{2p}\right)^p \qquad Y_p(x) \approx -\sqrt{\frac{2}{\pi p}} \left(\frac{ex}{2p}\right)^{-p}$$

1.6 Modified Bessel Functions


1.6.1 Bessel's Modified Equation

The most general form of Bessel's modified equation is $^{14:274}$

$$\frac{d^2y}{dx^2} + \frac{1}{x}\frac{dy}{dx} - \left(\lambda^2 + \frac{p^2}{x^2}\right)y = 0$$



Plots of $J_p(x)$



Plots of $Y_p(x)$

which has the general solution $^{14:275}$

$$y = AI_p(\lambda x) + BK_p(\lambda x)$$

where I_p are Modified Bessel functions of the first kind and K_p are modified Bessel functions of the second kind. Modified Bessel functions of the first kind have no closed form representation; however, they can be used to define Bessel functions of the second kind: ^{14:275}

$$K_p(x) = \frac{\pi}{2} \frac{I_{-p}(x) - I_p(x)}{\sin(p\pi)}$$

1.6.2 Modified Bessel Functions Relations

Relations involving $I_p(x)$ ^{14: 280}

(a)
$$xI_{p-1}(x) - xI_{p+1}(x) = 2pI_p(x)$$

(b)
$$I_{p-1}(x) - I_{p+1}(x) = 2\frac{d}{dx}I_p(x)$$

(c)
$$x \frac{d}{dx} [I_p(x)] + pI_p(x) = xI_{p-1}(x)$$

(d)
$$x \frac{d}{dx} [I_p(x)] - pI_p(x) = xI_{p+1}(x)$$

(e)
$$\frac{d}{dx}[I_0(x)] = I_1(x)$$

(f)
$$I_2(x) = -\frac{2}{x}I_1(x) + I_0(x)$$

Relations involving $K_p(x)$ ^{14:280}

(g)
$$xK_{p-1}(x) - xK_{p+1}(x) = -2pK_p(x)$$

(h)
$$K_{p-1}(x) + K_{p+1}(x) = -2\frac{d}{dx}K_p(x)$$

(i)
$$x \frac{d}{dx} [K_p(x)] + pK_p(x) = -xK_{p-1}(x)$$

(j)
$$x \frac{d}{dx} [K_p(x)] - pK_p(x) = -xK_{p+1}(x)$$

(k)
$$\frac{d}{dx}[K_0(x)] = -K_1(x)$$

(1)
$$K_2(x) = \frac{2}{x}K_1(x) + K_0(x)$$

1.6.3 Asymptotic Forms of Modified Bessel Functions

For $x \to \infty$ ^{14:278}

$$I_p(x) \approx \frac{e^x}{\sqrt{2\pi x}} \left(1 - \frac{4p^2 - 1}{8x} \right)$$
$$K_p(x) \approx \sqrt{\frac{\pi}{2x}} e^{-x} \left(1 + \frac{4p^2 - 1}{8x} \right)$$


1.7 Partial Differential Equations

1.7.1 Basis Functions for Laplace's Equation


Basis functions are the most general solutions to $\nabla^2 \psi = 0.18$

^{*}If m is an integer, $J_{-m} \to Y_m$. If k is imaginary, $J_m(kr) \to I_m(|k|r)$ and $Y_m(kr) \to K_m(|k|r)$

 $^{{}^{\}dagger}Y_{lm}(\theta,\phi)$ is the spherical harmonic function



Plots of $I_p(x)$

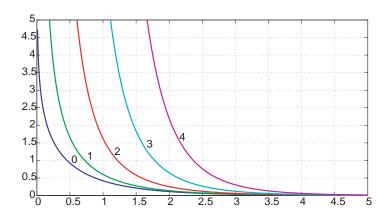

Plots of $K_p(x)$

Geometry	Basis Function ψ
2D Cartesian	$\psi = (A\sin kx + B\cos kx)\left(Ce^{ky} + De^{-ky}\right)$
2D Cylindrical	$\psi = A_0 + B_0 \ln r + (A \sin n\theta + B \cos n\theta) \times (Cr^n + Dr^{-n})$
3D Cartesian	$\psi = Ae^{ik_xx}e^{ik_yy}e^{k_zz} \text{ with } k_x^2 + k_y^2 - k_z^2 = 0$
3D Cylindrical	$\psi = Ae^{\pm im\theta}e^{\pm kz}J_{\pm m}(kr)^*$
2D Spherical	$\psi = \left(Ar^l + Br^{-(l+1)}\right) P_l(\cos\theta)$
3D Spherical	$\psi = \sum_{m=-l}^{l} \left(A_{lm} r^l + B_{lm} r^{-(l+1)} \right) Y_{lm}(\theta, \phi)^{\dagger}$

1.8 Gaussian Integrals

Definite integral relations of Gaussian integrals ^{14:255}

(a)
$$\int_{0}^{\infty} e^{-ax^{2}} dx = \frac{1}{2} \left(\frac{\pi}{a}\right)^{1/2}$$
(b)
$$\int_{-\infty}^{\infty} e^{-ax^{2}} dx = \left(\frac{\pi}{a}\right)^{1/2}$$
(c)
$$\int_{-\infty}^{\infty} e^{-ax^{2}} e^{-2bx} dx = \left(\frac{\pi}{a}\right)^{1/2} e^{\frac{b^{2}}{a}} \quad \text{for a>0}$$
(d)
$$\int_{-\infty}^{\infty} x e^{-a(x-b)x^{2}} dx = b \left(\frac{\pi}{a}\right)^{1/2}$$
(e)
$$\int_{-\infty}^{\infty} x^{2} e^{-ax^{2}} dx = \frac{1}{2} \left(\frac{\pi}{a^{3}}\right)^{1/2}$$

$$\left(\frac{1}{2} \Gamma\left(\frac{n+1}{2}\right) / a^{(n+1)/2} \quad \text{a>0}$$

$$\left(\frac{2k-1)!!}{2^{k+1}a^{k}} \sqrt{\frac{\pi}{a}} \quad \text{n=2k,a>0}$$

$$\frac{k!}{2a^{k+1}} \quad \text{n=2k+1,a>0}$$

Definite integrals of common Gaussian relations ^{21:65}

Definite integrals of common Gaussian relations				
n	$\int_{0}^{\infty} x^n e^{-ax^2} dx$	$\int_{-\infty}^{\infty} x^n e^{-ax^2} dx$	$\int\limits_{0}^{\infty} x^{\frac{1}{2}(n-1)} e^{-ax} dx$	
0	$\frac{\pi^{1/2}}{2a^{1/2}}$	$\frac{\pi^{1/2}}{a^{1/2}}$	$\frac{\pi^{1/2}}{a^{1/2}}$	
1	$\frac{1}{2a}$	0	$\frac{1}{a}$	
2	$\frac{\pi^{1/2}}{4a^{3/2}}$	$\frac{\pi^{1/2}}{2a^{3/2}}$	$rac{\pi^{1/2}}{2a^{3/2}}$	
3	$\frac{1}{2a^2}$	0	$\frac{1}{a^2}$	
4	$\frac{3\pi^{1/2}}{8a^{5/2}}$	$\frac{3\pi^{1/2}}{4a^{5/2}}$	$rac{3\pi^{1/2}}{4a^{5/2}}$	
5	$\frac{1}{a^3}$	0	$\frac{2}{a^3}$	
6	$\frac{15\pi^{1/2}}{16a^{7/2}}$	$\frac{15\pi^{1/2}}{8a^{7/2}}$	$\frac{15\pi^{1/2}}{8a^{7/2}}$	

1.9 Error functions

The error function ^{14:242}

$$\operatorname{erf}(x) = \frac{2}{\sqrt{\pi}} \int_{0}^{x} e^{-t^{2}} dt$$

Taylor expansion of the error function $^{14:242}$

$$\operatorname{erf}(x) = \frac{2}{\sqrt{\pi}} \sum_{n=0}^{\infty} \frac{(-1)^n x^{2n+1}}{n!(2n+1)} = \frac{2}{\sqrt{\pi}} \left(x - \frac{x^3}{3} + \frac{x^5}{10} - \frac{x^7}{42} + \dots \right)$$

The complimentary error function $^{14:242}$

$$\operatorname{erfc}(x) = \frac{2}{\sqrt{\pi}} \int_{x}^{\infty} e^{-t^{2}} dt = 1 - \operatorname{erf}(x)$$

Taylor expansion of the complimentary error function 1:469

erfc
$$(x) \approx \frac{e^{-x^2}}{x\sqrt{\pi}} \left(1 - \frac{1}{2x^2} + \frac{3}{(2x^2)^2} - \frac{15}{(2x^2)^3} + \dots \right)$$

Chapter 2

Fundamental Constants and SI Units

Numerical values for all constants taken from the 2006 CODATA Internationally Recommended Values of the Fundamental Physical Constants.

Universal Constants

Constant	Symbol	Value	Unit
Avagadro's Constant	N_A	$6.022\ 141\ 79(30)\times10^{23}$	mol^{-1}
Boltzmann's Constant	k_B	$ 1.380 \ 650 \ 4(24) \times 10^{-23} 8.617 \ 343 \ 1(15) \times 10^{-5} $	$_{\rm eV/K}^{\rm J/K}$
Elementary Charge	e	$1.602\ 176\ 487(40) \times 10^{-19}$	\mathbf{C}
Impedance of Vacuum $\sqrt{\mu_0/\epsilon_0}$	Z_0	376.730 313 461	Ω
Permittivity of Vacuum	ϵ_0	$8.854\ 187\ 817{ imes}10^{-12}$	F/m
Permeability of Vacuum	μ_0	$4\pi \times 10^{-7}$	N/A^2
Planck's Constant	h	$ 6.626\ 068\ 96(33) \times 10^{-34} $	$\begin{array}{c} J {\cdot} s \\ eV {\cdot} s \end{array}$
H-bar $(h/2\pi)$	\hbar	$ \begin{array}{c} 1.054\ 571\ 628(53) \times 10^{-34} \\ 6.582\ 118\ 99(16) \times 10^{-16} \end{array} $	$\begin{array}{c} J {\cdot} s \\ eV {\cdot} s \end{array}$
Speed of Light (vacuum)	c	$2.997\ 924\ 58{\times}10^{8}$	$\mathrm{m/s}$

Atomic and Nuclear Constants

Constant	Symbol	Value	Unit
Electron Rest Mass	m_e	$9.109\ 382\ 15(45) \times 10^{-31}$ $5.485\ 799\ 0943(23) \times 10^{-4}$ $0.510\ 998\ 910(13)$	$\begin{array}{c} {\rm kg} \\ {\rm u} \\ {\rm MeV/c^2} \end{array}$
Proton Rest Mass	m_p	$1.672 621 637(83) \times 10^{-27}$ 1.007 276 466 77(10) 938.272 013(23)	${\rm kg} \\ {\rm u} \\ {\rm MeV/c^2}$
Neutron Rest Mass	m_n	$1.674\ 927\ 211(84) \times 10^{-27}$ $1.008\ 664\ 915\ 97(43)$ $939.565\ 346(23)$	$\begin{array}{c} \rm kg \\ \rm u \\ \rm MeV/c^2 \end{array}$
Deuteron (² H) Rest Mass	m_d	$3.343 583 20(17) \times 10^{-27}$ 2.013 553 212 724(78) 1875.612 793(47)	$\begin{array}{c} \rm kg \\ \rm u \\ \rm MeV/c^2 \end{array}$
Triton (³ H) Rest Mass	m_t	$5.007 \ 355 \ 88(25) \times 10^{-27}$ $3.015 \ 500 \ 7134(25)$ $2808.9209 \ 06(70)$	${\rm kg}\\ {\rm u}\\ {\rm MeV/c^2}$
Helion (³ He) Rest Mass	m_h	$5.006\ 411\ 92(25) \times 10^{-27}$ $3.014\ 932\ 2473(26)$ $2808.391\ 383(70)$	$ m kg$ $ m u$ $ m MeV/c^2$
Alpha (⁴ He) Rest Mass	m_{lpha}	$6.644 656 20(33) \times 10^{-27}$ 4.001 506 179 127(62) 3727.379 109(93)	${\rm kg} \\ {\rm u} \\ {\rm MeV/c^2}$
Proton to Electron Mass Ratio	m_p/m_e	$1836.152 \ 672 \ 47(80) \approx 6\pi^5$	
Bohr Radius $(a_0 = 4\pi\epsilon_0 \hbar^2 / m_e e^2)$	a_0	$0.529\ 177\ 208\ 59(36) \times 10^{-10}$	m
Classical Electron Radius $(r_e = e^2/4\pi\epsilon_0 m_e c^2)$	r_e	$2.817\ 940\ 289\ 4(58) \times 10^{-15}$	m
Inverse Fine Structure Constant	$1/\alpha$	137.035 999 679(94)	
Rydberg Constant	$R_{\infty} \\ R_{\infty} hc$	$1.097 \ 373 \ 156 \ 852 \ 7(73) \times 10^7$ $13.605 \ 691 \ 93(34)$	${ m m}^{-1}$ ${ m eV}$
Stefan-Boltzmann Constant	σ	$5.670\ 400(40)\times10^{-8}$	$ m W/m^2/K^4$
Thomson Cross Section $(\sigma_{\rm Th} = (8\pi/3) r_e^2)$	$\sigma_{ m Th}$	$ 0.665\ 245\ 855\ 8(27) \times 10^{-28} $ $ 0.665\ 245\ 855\ 8(27) $	m ² barns

The System of International Units

The System of International Units				
Quantity	Symbol	SI Unit	Dimensions	
Activity	${\cal A}$	Becquerel	s^{-1}	
Capacitance	\mathbf{C}	farad (F)	$\frac{s^2 \cdot C^2}{kg \cdot m^2}$	
Charge	\mathbf{q}	*coulomb (C)	\mathbf{C}	
Conductance		siemens (S)	$\frac{s \cdot C^2}{kg \cdot m^2}$ $\frac{s \cdot C^2}{kg \cdot m^3}$ $\frac{C}{s}$ $\frac{C}{m^2}$	
Conductivity	σ	siemens/meter (S/m)	$\frac{s \cdot C^2}{kq \cdot m^3}$	
Current	I	ampére (A)	$\frac{C}{s}$	
Displacement	\mathbf{D}	$coulomb/m^2$	$\frac{C}{m^2}$	
Electric Field	${f E}$	volt/meter	$\frac{kg \cdot m}{s^2 \cdot C}$	
Electromotance	ε	volt (V)	$\frac{kg \cdot m^2}{s^2 \cdot C}$ $\frac{kg \cdot m^2}{s^2}$	
Energy	W	joule (J)	$\frac{kg \cdot m^2}{s^2}$	
Force	${f F}$	newton (N)	$\frac{kg \cdot m}{s^2}$ s ⁻¹	
Frequency	ν	hertz (Hz)		
Impedance	\mathbf{Z}	ohm (Ω)	$\frac{kg \cdot m^2}{s \cdot C^2}$	
Inductance	${f L}$	henry (H)	$\frac{kg \cdot m^2}{C^2}$	
Length	l	*meter (m)	m	
Magnetic Flux	Φ	weber (Wb)	$\frac{kg \cdot m^2}{s \cdot C}$	
Magnetic Flux Density	В	tesla (T)	$\frac{kg}{s \cdot C}$	
Magnetic Moment	μ	$ampere-m^2$	$\frac{m^2 \cdot C}{s}$	
Magnetization	${f M}$	ampere-turn/m	$\frac{C}{s \cdot m}$	
Permeability	μ	henry/meter	$rac{m^2 \cdot C}{s}$ $rac{C}{s \cdot m}$ $rac{kg \cdot m}{C^2}$ $rac{s^2 \cdot C^2}{kg \cdot m^3}$ $rac{C}{m^2}$	
Permittivity	ϵ	farad/meter	$\frac{s^2 \cdot C^2}{kg \cdot m^3}$	
Polarization	P	$coulomb/m^2$	$\frac{C}{m^2}$	
Electric Potential	V	volt (V)	$\frac{kg \cdot m^2}{s^2 \cdot C}$	
Power	P	watt (W)	$\frac{kg \cdot m^2}{s^3}$	
Pressure	p	pascal (Pa)	$\frac{kg}{m \cdot s^2}$	
Resistance	\mathbf{R}	ohm (Ω)	$\frac{kg \cdot m^2}{s \cdot C^2}$	
Resistivity	η	ohm-meter	$\frac{kg \cdot m^3}{s \cdot C^2}$	
Temperature	${ m T}$	*kelvin (K)	K	
Thermal Conductivity	κ	${\rm watt/meter/kelvin}$	$\frac{kg \cdot m}{s^3}$	
Time	\mathbf{s}	*second	\mathbf{s}	
Velocity	v	meter/second	$\frac{m}{s}$	

 $^{\ ^{*}}$ denotes a fundamental SI base unit

Energy Conversion Factors

Energy	\leftrightarrow	Temperature	$1 \text{ eV} = 1.602189 \times 10^{-19} \text{ J}$
			$1 \text{ eV} = 1.1604505 \times 10^4 \text{ K}$
Energy	\leftrightarrow	Mass	$1~\mathrm{u} = 931.501~\mathrm{MeV/c^2} = 1.660566{\times}10^{-27}~\mathrm{kg}$
Energy	\leftrightarrow	Wavelength	$hc = 1239.8419 \text{ MeV} \cdot fm = 1239.8419 \text{ eV} \cdot nm$
			$\hbar c = 197.329 \text{ MeV} \cdot \text{fm} = 197.329 \text{ eV} \cdot \text{nm}$ $e^2/4\pi\epsilon_0 = 1.439976 \text{ MeV} \cdot \text{fm}$
			0 / 1/100 1110 1110 1111

Chapter 3

Electricity and Magnetism

In this chapter, all units are SI.

e is the elementary electric charge

q is the total particle charge

Z is the particle atomic (proton) number

n is the particle density

U is energy

r is the particle position

v is the particle velocity

 ρ is volumetric charge density

 σ is surface charge density

J is volumetric current density

K is surface current density

 τ and σ are the volume and surface, respectively

 $d\tau$, $d\sigma$, and $d\mathbf{l}$ are the volume, surface, and line elements, respectively b and f subscripts refer to bound and free charges

3.1 Electromagnetic in Vacuum

3.1.1 Fundamental Equations

Maxwell's equations ^{10:326}

$$\nabla \cdot \mathbf{E} = \rho/\epsilon_0 \qquad \qquad \nabla \cdot \mathbf{B} = 0$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \qquad \qquad \nabla \times \mathbf{B} = \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \frac{\partial \mathbf{E}}{\partial t}$$

Electrostatic scalar potential relations ^{10:87}

$$\mathbf{E} = -\nabla V \qquad \qquad V = -\int \mathbf{E} \cdot d\mathbf{l}$$

$$\nabla^2 V = -\frac{\rho}{\epsilon_0} \qquad \qquad V = \frac{1}{4\pi\epsilon_0} \int \frac{\rho}{r} d\tau$$

Electrostatic vector potential relations ^{10:240}

$$\mathbf{B} = \nabla \times \mathbf{A}$$
 $\nabla^2 \mathbf{A} = -\mu_0 \mathbf{J}$ $\mathbf{A} = \frac{\mu_0}{4\pi} \int \frac{\mathbf{J}}{r} d\tau$

Electromagnetic energy stored in the fields ^{10:348}

$$U_{\rm em} = \frac{1}{2} \int \left(\epsilon_0 E^2 + \frac{1}{\mu_0} B^2 \right) d\tau$$

Coulomb Force $^{10:59}$

$$\mathbf{F} = \frac{q_1 q_2}{4\pi\epsilon_0 |\mathbf{r}_1 - \mathbf{r}_2|^2} \frac{\mathbf{r}_1 - \mathbf{r}_2}{|\mathbf{r}_1 - \mathbf{r}_2|}$$

Lorentz force law $^{10:204}$

$$\mathbf{F} = q\left(\mathbf{E} + \mathbf{v} \times \mathbf{B}\right)$$

Biot-Savart law 10:215

$$\mathbf{B} = \frac{\mu_0}{4\pi} \int \frac{\mathbf{I} \times \hat{\mathbf{r}}}{r^2} dl$$

3.1.2 Boundary Conditions

For given surface S, + and - refer to above and below S, respectively. $\hat{\mathbf{n}}$ is a unit vector perpendicular to S.

Electrostatic boundary conditions on ${\bf E}^{~10:179}$

$$E_+^{\perp} - E_-^{\perp} = \sigma/\epsilon_0$$

$$E_{+}^{||} - E_{-}^{||} = 0$$

Magnetostatic boundary conditions on ${\bf B}^{10:241}$

$$B_+^{\perp} - B_-^{\perp} = 0$$

$$B_{+}^{||} - B_{-}^{||} = \mu_0 K$$

$$\mathbf{B}_{+} - \mathbf{B}_{-} = \mu_0 \left(\mathbf{K} \times \hat{\mathbf{n}} \right)$$

3.2 Electromagnetics in Matter

3.2.1 Fundamental Equations

Maxwell's equations in matter $^{10:330}$

$$\nabla \cdot \mathbf{D} = \rho_f \qquad \qquad \nabla \cdot \mathbf{B} = 0$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \qquad \qquad \nabla \times \mathbf{H} = \mathbf{J}_f + \frac{\partial \mathbf{D}}{\partial t}$$

The polarization in linear media (χ_e is the polarizability) $^{10:179}$

$$\mathbf{P} = \epsilon_0 \chi_e \mathbf{E}$$
 [electric dipole moments per m⁻³]

The magnetization in linear media (χ_m is the magnetization) $^{10:274}$

$$\mathbf{M} = \chi_m \mathbf{H}$$
 [electric dipole moments per m⁻³]

The displacement field $^{10:\,175,180}$

$$\mathbf{D} = \epsilon_0 \mathbf{E} + \mathbf{P}$$

$$= \epsilon \mathbf{E} \quad \text{(linear media only where } \epsilon \equiv \epsilon_0 (1 + \chi_e) \text{)}$$

The H-field (Magnetic field) 10:269,275

$$\mathbf{H} = \frac{1}{\mu_0} \mathbf{B} - \mathbf{M}$$

$$= \frac{1}{\mu} \mathbf{B} \quad \text{(linear media only where } \mu \equiv \mu_0 (1 + \chi_m) \text{)}$$

Associated bound charges $(\sigma_b,\,\rho_b)$ and currents $(\mathbf{K}_b,\,\mathbf{J}_b)^{-10:\,167,168,267,268}$

$$\sigma_b = \mathbf{P} \cdot \hat{\mathbf{n}}$$
 $\rho_b = -\nabla \cdot \mathbf{P}$ $\mathbf{K}_b = \mathbf{M} \times \hat{\mathbf{n}}$ $\mathbf{J}_b = \nabla \times \mathbf{M}$

3.2.2 Boundary Conditions

For given surface S, + and - refer to above and below S, respectively. $\hat{\mathbf{n}}$ is a unit vector perpendicular to S. $^{10:178,273}$

$$D_{+}^{\perp} - D_{-}^{\perp} = \sigma_{f}$$

$$D_{+}^{\parallel} - \mathbf{D}_{-}^{\parallel} = \mathbf{P}_{+}^{\parallel} - \mathbf{P}_{-}^{\parallel}$$

$$H_{+}^{\perp} - H_{-}^{\perp} = -\left(M_{+}^{\perp} - M_{-}^{\perp}\right)$$

$$\mathbf{H}_{+}^{\parallel} - \mathbf{H}_{-}^{\parallel} = \mathbf{K}_{f} \times \hat{\mathbf{n}}$$

3.3 Dipoles

In this section, **p** and **m** are electric and magnetic dipoles, respectively. **N** is the torque and **F** is the force generated by the dipole.

Definition 10:149,244	Fields 10: 153,155,246	Potentials 10: 166,244
$\mathbf{p} \equiv \int \mathbf{r} \rho(\mathbf{r}) d\tau$	$\mathbf{E}_{dip}(\mathbf{r}) = \frac{1}{4\pi\epsilon_0 r^3} \left[3(\mathbf{p} \cdot \hat{\mathbf{r}})\hat{\mathbf{r}} - \mathbf{p} \right]$ $\mathbf{E}_{dip}(r, \theta) = \frac{p}{4\pi\epsilon_0 r^3} \left(2\cos\theta \hat{\mathbf{r}} + \sin\theta \hat{\boldsymbol{\theta}} \right)$	$V_{dip} = \frac{1}{4\pi\epsilon_0} \frac{\mathbf{p} \cdot \hat{\mathbf{r}}}{r^2}$
$\mathbf{m} \equiv I \int d\boldsymbol{\sigma}$	$\mathbf{B}_{dip} = \frac{\mu_0}{4\pi r^3} \left[3(\mathbf{m} \cdot \hat{\mathbf{r}}) \hat{\mathbf{r}} - \mathbf{m} \right]$ $\mathbf{B}_{dip}(r, \theta) = \frac{\mu_0 m}{4\pi r^3} \left(2\cos\theta \hat{\mathbf{r}} + \sin\theta \hat{\boldsymbol{\theta}} \right)$	$\mathbf{A}_{dip}(\mathbf{r}) = \frac{\mu_0}{4\pi} \frac{\mathbf{m} \times \hat{\mathbf{r}}}{r^2}$

Electric ^{10:164,165}	Magnetic 10: 257,258,281
$\mathbf{F} = (\mathbf{p} \cdot \nabla) \mathbf{E}$ $\mathbf{N} = \mathbf{p} \times \mathbf{E}$ $\mathbf{U} = -\mathbf{p} \cdot \mathbf{E}$	$\mathbf{F} = \nabla \left(\mathbf{m} \cdot \mathbf{B} \right)$ $\mathbf{N} = \mathbf{m} \times \mathbf{B}$ $\mathbf{U} = -\mathbf{m} \cdot \mathbf{B}$

3.4 Circuit Electrodynamics

Microscopic Ohm's law ^{10:285}

$$\mathbf{J} = \sigma_c \mathbf{E}$$

where σ_c is the conductivity. Resistivity, ρ_r , is defined as $\rho_r = 1/\sigma_c$.

Macroscopic Ohm's law ^{10:287}

$$V = IR$$

where V is the voltage, I is the current, and R is the resistance.

The voltage due to a changing magnetic field (Faraday's Law) $^{10:\,295,296}$,

$$V = -\frac{d\Phi}{dt} \qquad \qquad \Phi = \int_{surface} \mathbf{B} \cdot d\mathbf{A}$$

Capacitance is written as C, and inductance is written as L. 18

$$Q = CV$$

$$\Phi = LI$$

$$I = -C\frac{dV}{dt}$$

$$V = -L\frac{dI}{dt}$$

Energy stored in capacitance and inductance $^{10:\,106,317}$

$$U = \frac{1}{2}LI^2 + \frac{1}{2}CV^2$$

3.5 Conservation Laws

Conservation of charge $^{10:214}$

$$\frac{\partial \rho}{\partial t} = -\nabla \cdot \mathbf{J}$$

Poynting vector ^{10:347}

$$\mathbf{S} \equiv \frac{1}{\mu_0} \left(\mathbf{E} \times \mathbf{B} \right)$$

Poynting's theorem (integral form) 10:347

$$\frac{dU}{dt} = -\frac{d}{dt} \int \frac{1}{2} \left(\epsilon_0 E^2 + \frac{1}{\mu_0} B^2 \right) d\tau - \frac{1}{\mu_0} \oint (\mathbf{E} \times \mathbf{B}) \cdot d\boldsymbol{\sigma}$$
volume
surface

Poynting's theorem (differential form) 10:348

$$\frac{\partial}{\partial t} \left(U_{\text{mechanical}} + U_{\text{em}} \right) = -\nabla \cdot \mathbf{S}$$

Maxwell's stress tensor $^{10:352}$

$$T_{ij} \equiv \epsilon_0 \left(E_i E_j - \frac{1}{2} \delta_{ij} E^2 \right) + \frac{1}{\mu_0} \left(B_i B_j - \frac{1}{2} \delta_{ij} B^2 \right)$$

Electromagnetic force density on collection of charges 10:352

$$\mathbf{f} = \nabla \cdot \overleftarrow{\mathbf{T}} - \epsilon_0 \mu_0 \frac{\partial \mathbf{S}}{\partial t}$$

Total electromagnetic force on collection of charges $^{10:353}$

$$\mathbf{F} = \oint \overrightarrow{\mathbf{T}} \cdot d\boldsymbol{\sigma} - \epsilon_0 \mu_0 \frac{d}{dt} \int \mathbf{S} \, d\tau$$
surface volume

Momentum density in electromagnetic fields ^{10:355}

$$p_{em} = \mu_0 \epsilon_0 \mathbf{S}$$

Conservation of momentum in electromagnetic fields $^{10:356}$

$$\frac{\partial}{\partial t} \left(p_{mech} + p_{em} \right) = \nabla \cdot \overleftarrow{\mathbf{T}}$$

3.6 Electromagnetic Waves

In this section,

 λ is the wavelength $k = 2\pi/\lambda$ is the wave number ν is the frequency

 $\omega = 2\pi\nu$ is the angular frequency

 $T = 1/\nu$ is the period

 $\mathbf{k} = k\mathbf{k}$ is the wave number vector

 $\hat{\mathbf{n}}$ is the polarization vector in the direction of electric field

 $\dot{\mathbf{X}}$ is a complex vector

The wave equation in three dimensions $^{10:376}$

$$\nabla^2 f = \frac{1}{v^2} \frac{\partial^2 f}{\partial t^2}$$

is satisfied by two transformations of Maxwell's equations in vacuum $^{10:376}$

$$\nabla^2 \mathbf{E} = \mu_0 \epsilon_0 \frac{\partial^2 \mathbf{E}}{\partial t^2} \qquad \qquad \nabla^2 \mathbf{B} = \mu_0 \epsilon_0 \frac{\partial^2 \mathbf{B}}{\partial t^2}$$

These have sinusoidal solutions, but it is more convenient to work with imaginary exponentials and take the real parts ^{10:379}

$$\tilde{\mathbf{E}}(\mathbf{r},t) = \tilde{E_0}e^{i(\mathbf{k}\cdot\mathbf{r} - \omega t)}\hat{\mathbf{n}}$$

$$\tilde{\mathbf{B}}(\mathbf{r},t) = \frac{1}{c}\tilde{E}_0 e^{i(\mathbf{k}\cdot\mathbf{r}-\omega t)}(\hat{\mathbf{k}}\times\hat{\mathbf{n}}) = \frac{1}{c}\hat{\mathbf{k}}\times\tilde{\mathbf{E}}$$

EM Wave Relations ^{10:381–382}

Parameter	Symbol	Equation
Averaged energy per unit volume	$\langle u \rangle$	$\frac{1}{2}\epsilon_0 E_0^2$
Averaged energy flux density	$\langle \mathbf{S} \rangle$	$\frac{1}{2}c\epsilon_0 E_0^2\hat{\mathbf{k}}$
Averaged momentum density	$\langle P \rangle$	$\frac{1}{2c}\epsilon_0 E_0^2 \hat{\mathbf{k}}$
Intensity	I	$\langle S \rangle$
Radiation pressure	P	$\frac{I}{c}$

3.6.1 EM Waves in Matter

In this section, θ is measured from the normal to the surface

Assuming no free charge or current in a linear media, the EM wave equations become $^{10:\,383}$

$$\nabla \cdot \mathbf{E} = 0 \qquad \qquad \nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}$$

$$\nabla \cdot \mathbf{B} = 0 \qquad \qquad \nabla \times \mathbf{B} = \mu \epsilon \frac{\partial \mathbf{E}}{\partial t}$$

Speed of light in a material 10:383

$$v = \frac{1}{\sqrt{\epsilon \mu}} = \frac{c}{n}$$

Index of refraction ^{10:383}

$$n \equiv \sqrt{\frac{\epsilon \mu}{\epsilon_0 \mu_0}} \approx \sqrt{\epsilon_r}$$

Intensity $^{10:383}$

$$I = \frac{1}{2}\epsilon v E_0^2$$

Boundary conditions at a material surface $^{10:384}$

$$\epsilon_1 E_1^{\perp} = \epsilon_2 E_2^{\perp} \qquad \qquad \mathbf{E}_1^{\parallel} = \mathbf{E}_2^{\parallel}$$

$$B_1^{\perp} = B_2^{\perp} \qquad \qquad \frac{1}{\mu_1} \mathbf{B}_1^{\parallel} = \frac{1}{\mu_2} \mathbf{B}_2^{\parallel}$$

Reflection and transmission coefficients ^{10:386}

$$R \equiv \frac{I_{ref}}{I_{inc}} = \left(\frac{n_1 - n_2}{n_1 + n_2}\right)^2$$
 $T \equiv \frac{I_{trans}}{I_{inc}} = \frac{4n_1n_2}{(n_1 + n_2)^2}$ $R + T = 1$

Snell's Laws for oblique incidence on material surface ^{10:388}

$$k_{inc}\sin\theta_{inc} = k_{ref}\sin\theta_{ref} = k_{trans}\sin\theta_{trans}$$

$$\theta_{inc} = \theta_{ref}$$

$$\frac{\sin \theta_{trans}}{\sin \theta_{inc}} = \frac{n_1}{n_2}$$

Fresnel Equations $^{13:305-306}$

Polarization to incident plane	E_{trans}/E_{inc}	E_{ref}/E_{inc}
Perpendicular	$\frac{2n_1\cos\theta_{inc}}{n_1\cos\theta_{inc} + (\mu_1/\mu_2)\sqrt{n_2^2 - n_1^2\sin^2\theta_{inc}}}$	$\frac{n_1 \cos \theta_{inc} - (\mu_1/\mu_2) \sqrt{n_2^2 - n_1^2 \sin^2 \theta_{inc}}}{n_1 \cos \theta_{inc} + (\mu_1/\mu_2) \sqrt{n_2^2 - n_1^2 \sin^2 \theta_{inc}}}$
Parallel	$\frac{2n_1n_2\cos\theta_{inc}}{(\mu_1/\mu_2)n_2^2\cos\theta_{inc} + n_1\sqrt{n_2^2 - n_1^2\sin^2\theta_{inc}}}$	$\frac{(\mu_1/\mu_2)n_2^2\cos\theta_{inc} - n_1\sqrt{n_2^2 - n_1^2\sin^2\theta_{inc}}}{(\mu_1/\mu_2)n_2^2\cos\theta_{inc} + n_1\sqrt{n_2^2 - n_1^2\sin^2\theta_{inc}}}$

Brewster's angle (no reflection of perpendicular incidence wave) 10:390

$$\sin^2 \theta_B = \frac{1 - \beta^2}{(n_1/n_2)^2 - \beta^2}$$

where
$$\beta = \mu_1 n_2 / \mu_2 n_1$$

If the wave is in a conductor, it will experience damping due to the presence of free charges, subject to $\mathbf{J}_f = \sigma \mathbf{E}$. Solving Maxwell's equations gives $\mathbf{J}_{0:394}$

$$\tilde{k}^2 = \mu \epsilon \omega^2 + i\mu \sigma \omega$$

Decomposing gives real and imaginary parts of the wave vector $\tilde{k} = k + i\kappa$

$$k \equiv \omega \sqrt{\frac{\epsilon \mu}{2}} \left[\sqrt{1 + \left(\frac{\sigma}{\epsilon \omega}\right)^2} + 1 \right]^{1/2} \qquad \kappa \equiv \omega \sqrt{\frac{\epsilon \mu}{2}} \left[\sqrt{1 + \left(\frac{\sigma}{\epsilon \omega}\right)^2} - 1 \right]^{1/2}$$

Knowing the imaginary part of the wave number, allows to know the damping of the wave which is characterized by a skin depth or the e-folding length $d \equiv 1/\kappa$. ^{10:394}

3.7 Electrodynamics

We are allowed to choose $\nabla \cdot \mathbf{A}$; two common gauges used are the Lorentz and Coulomb gauge. $^{10:421-422}$

Gauge	$ abla \cdot \mathbf{A}$	V Equation	A Equation
Lorentz	$-\mu_0 \epsilon_0 \frac{\partial V}{\partial t}$	$\nabla^2 V - \mu_0 \epsilon_0 \frac{\partial^2 V}{\partial t^2} = -\frac{\rho}{\epsilon_0}$	$\nabla^2 \mathbf{A} - \mu_0 \epsilon_0 \frac{\partial^2 \mathbf{A}}{\partial t^2} = -\mu_0 \mathbf{J}$
Coulomb	0	$\nabla^2 V = -\frac{\rho}{\epsilon_0}$	$\nabla^2 \mathbf{A} - \mu_0 \epsilon_0 \frac{\partial^2 \mathbf{A}}{\partial t^2} = -\mu_0 \mathbf{J} + \mu_0 \epsilon_0 \nabla \left(\frac{\partial V}{\partial t} \right)$

For any scalar function λ , any potential formulation is valid if $^{10:420}$

$$\mathbf{A}' = \mathbf{A} + \nabla \lambda \qquad \qquad V' = V - \frac{\partial \lambda}{\partial t}$$

3.7.1 Fields of Moving Charges

In this section, ||A|| evaluates A at the retarded time ¹⁸

Definition of retarded time ^{10:423}

$$t_{ret} \equiv t - \frac{|\mathbf{r}(t) - \mathbf{r}(t_{ret})|}{c}$$

The Lienard-Wiechert potentials ^{10:432-433}

$$V = \frac{q}{4\pi\epsilon_0} \left| \left| \frac{1}{r\kappa} \right| \right| \qquad \mathbf{A} = \frac{\mu_0 q}{4\pi} \left| \left| \frac{\mathbf{v}}{r\kappa} \right| \right|$$

Electric field of a moving point charge ^{10:438}

$$\mathbf{E} = \frac{q}{4\pi\epsilon_0} \left| \left| (\hat{\mathbf{r}} - \mathbf{v}/c) \left(1 - v^2/c^2 \right) \frac{1}{\kappa^3 r^2} - \hat{\mathbf{r}} \times \left((\hat{\mathbf{r}} - \mathbf{v}/c) \times \mathbf{a}/c \right) \frac{1}{\kappa^3 rc} \right| \right|$$

Magnetic field of a moving point charge ^{10:438}

$$\mathbf{B} = ||\hat{\mathbf{r}}|| \times \mathbf{E}/c$$

where
$$\kappa = 1 - \hat{\boldsymbol{r}} \cdot \frac{\mathbf{v}}{c}$$
.

3.7.2 Radiation by Charges

In this section, $\mathbf{u} \equiv c\hat{\mathbf{r}} - \mathbf{v}$, $\gamma \equiv 1/\sqrt{1 - v^2/c^2}$ is the relativistic gamma factor, and \mathbf{a} is the acceleration.

Poynting vector associated with a moving charge ^{10:460}

$$\mathbf{S} = \frac{1}{u_0 c} \left[E^2 \hat{\mathbf{r}} - (\hat{\mathbf{r}} \cdot \mathbf{E}) \mathbf{E} \right]$$

Non-relativistic power radiated by a moving charge ^{10:462}

$$P = \frac{\mu_0 q^2 a^2}{6\pi c}$$

Relativistic power radiated by a moving charge per solid angle ^{10:463}

$$\frac{dP}{d\Omega} = \frac{q^2}{16\pi^2 \epsilon_0} \frac{|\hat{\mathbf{r}} \times (\mathbf{u} \times \mathbf{a})|^2}{(\hat{\mathbf{r}} \cdot \mathbf{u})^5}$$

Relativistic power radiated by a moving charge ^{10:463}

$$P = \frac{\mu_0 q^2 \gamma^6}{6\pi c} \left(a^2 - \left| \frac{\mathbf{v} \times \mathbf{a}}{c} \right|^2 \right)$$

Relativistic force of a moving charge $^{10:467}$

$$\mathbf{F}_{rad} = \frac{\mu_0 q^2}{6\pi c} \frac{d\mathbf{a}}{dt}$$

Chapter 4

Single Particle Physics

In this chapter, all units are SI with the exception of temperature, which is defined in the historical units of eV (electron-volts).

e is the elementary electric charge

q is the total particle charge

Z is the particle atomic (proton) number

m is the particle mass

r is the particle position

 \mathbf{v} is the particle velocity

U is energy

T is temperature; $T_{\text{keV}} = T$ in units of kiloelectron-volts

 ${f E}$ and ${f B}$ are the electric and magnetic fields

b is a unit vector in the direction of **B**

 \parallel and \perp indicate parallel and perpendicular to **b**

4.1 Single Particle Motion in E and B Fields

4.1.1 General Formulation

Single particle trajectories result from solving Newton's second law for a particle with charge q and mass m in electric and magnetic fields: 8:141

$$m\frac{d\mathbf{v}}{dt} = q\left(\mathbf{E} + \mathbf{v} \times \mathbf{B}\right)$$
 $\frac{d\mathbf{r}}{dt} = \mathbf{v}$

If **E** and **B** are independent of time, the particle's kinetic and potential energy is conserved $^{8:142}$

$$\frac{1}{2}mv^2 + qV = \text{constant}$$

where V is the scalar potential ($\mathbf{E} = -\nabla V$).

4.1.2 Gyro Motion Solutions for $B = B_0 \hat{z}$; E = 0

Particle initially has $\mathbf{r} = (x_0, y_0, z_0), \mathbf{v} = \mathbf{v}_{\parallel} + \mathbf{v}_{\perp}$, and arbitrary phase, ϕ .

Parallel to the field: 8:143

$$z(t) = z_0 + v_{\parallel} t$$

Perpendicular to the field: 8:144

$$x(t) = x_g + \rho_L \sin(\Omega_c t - \phi)$$
 $x_g \equiv x_0 + \rho_L \sin \phi$
 $y(t) = y_g + \rho_L \cos(\Omega_c t - \phi)$ $y_g \equiv y_0 - \rho_L \cos \phi$

The guiding center position is (x_g, y_g) ; the larmor (or gyro) radius is $\rho_L = v_{\perp}/\Omega_c = mv_{\perp}/qB$; the larmor (or gyro) frequency is Ω_c

4.1.3 Single Particle Drifts

In this section, \mathbf{R}_c is the particle's radius of curvature in a magnetic field and is defined as $\mathbf{b} \cdot \nabla \mathbf{b} = -\mathbf{R}_c/R_c^2$

 $E \times B$ drift $^{8:149}$

$$\mathbf{v}_E = \frac{\mathbf{E} \times \mathbf{B}}{B^2}$$

 ∇B drift $^{8:153}$

$$\mathbf{v}_{\nabla B} = \frac{mv_{\perp}^2}{2aB} \frac{\mathbf{B} \times \nabla B}{B^2}$$

Curvature drift 8:159

$$\mathbf{v}_{\kappa} = \frac{mv_{\parallel}^2}{qB} \frac{\mathbf{R}_c \times \mathbf{B}}{R_c^2 B}$$

Polarization drift $^{8:162}$

$$\mathbf{v}_p = \frac{m}{qB}\hat{\boldsymbol{b}} \times \frac{d\mathbf{v}_E}{dt}$$

Vacuum field only $\rightarrow \nabla \times \mathbf{B} = 0^{-8:160}$

$$\mathbf{v}_{\nabla B} + \mathbf{v}_{\kappa} = \frac{m}{qB} (v_{\parallel}^2 + \frac{v_{\perp}^2}{2}) \frac{\mathbf{R}_c \times \mathbf{B}}{R_c^2 B}$$

Particle drift velocity for a general force ${\bf F}^{-8:\,153}$

$$\mathbf{v}_F = \frac{\mathbf{F} \times \mathbf{B}}{qB^2}$$

4.1.4 Magnetic Moment And Mirroring

In this section, i refers to the initial point, and f stand for the final, or mirror, point.

Magnetic moment (the first adiabatic invariant) 8:167

$$\mu = \frac{mv_{\perp}^2(t)}{2B(t)} = \text{constant}$$

Force on particle in magnetic fields where $\nabla B/B \ll 1^{-8:171}$

$$F_{\parallel} \approx -\mu \nabla_{\parallel} B$$

Velocity in terms of velocity space pitch angle 8:174

$$v_{\perp i} = v_0 \sin \theta$$
 $v_{\parallel i} = v_0 \cos \theta$

Conservation of energy 8:174

$$\frac{1}{2}m\left(v_{\perp i}^2+v_{\parallel i}^2\right)=\frac{1}{2}mv_{\perp f}^2=U_{\rm total}={\rm constant}$$

Mirroring condition 8:175

$$\sin^2 \theta_c = \frac{U_{\perp i}}{U_{\text{total}}} = \frac{v_{\perp i}^2}{v_{\perp f}^2} = \frac{B_{min}}{B_{max}}$$

Fraction of trapped particles (Maxwellian distribution) 8:176

$$\mathcal{F}_{\text{trapped}} = \frac{1}{n} \int_{\theta_c}^{\pi - \theta_c} \sin \theta d\theta \int_0^{2\pi} d\phi \int_0^{\infty} \mathcal{F}_{\text{Maxwellian}}(v) v^2 dv$$

where n is the total number of particles in the distribution function

4.2 Binary Coulomb Collisions

r is the relative distance

 \mathbf{v}_1 and \mathbf{v}_2 are particle velocities in the lab frame \mathbf{V} and \mathbf{v} are the center of mass and relative velocities

 v_0 and b_0 are the initial relative velocity and impact parameter

 χ is the scattering angle in the center of mass frame

 \dot{x} is the time derivative of quantity x

Force between 2 charged particles

$$\mathbf{F} = -\nabla \left(\frac{q_1 q_2}{4\pi \epsilon_0 r} \right)$$


Transformation to center of mass frame 8:186

$$\mathbf{V} = \frac{m_1 \mathbf{v}_1 + m_2 \mathbf{v}_2}{m_1 + m_2}$$

$$\mathbf{v} = \mathbf{v}_1 - \mathbf{v}_2$$

$$\mathbf{v}_1 = \mathbf{V} + \frac{m_2 \mathbf{v}}{m_1 + m_2}$$

$$\mathbf{v}_2 = \mathbf{V} - \frac{m_1 \mathbf{v}}{m_1 + m_2}$$

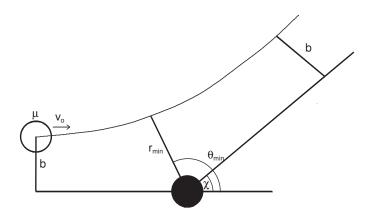

Schematic of two body collision in the reduced mass frame.

Reduced mass $^{8:186}$

$$m_{\mu} = \frac{m_1 m_2}{m_1 + m_2}$$

Conservation of energy 8:187

$$\frac{1}{2}m_{\mu}v^{2} + \frac{q_{1}q_{2}}{4\pi\epsilon_{0}r} = E_{0} = \frac{1}{2}m_{\mu}v_{0}^{2} = \text{constant}$$

Conservation of angular momentum 8:187

$$m_{\mu}\mathbf{r} \times \mathbf{v} = \mathbf{L}_0 = -m_{\mu}bv_0 = \text{constant}$$

Transformation to cylindrical coordinates 8:188

$$\mathbf{r} = r\hat{\mathbf{r}}$$
 $\mathbf{v} = \dot{r}\hat{\mathbf{r}} + r\dot{\theta}\hat{\boldsymbol{\theta}}$

Ordinary differential equation for unknown r(t) 8:188

$$\dot{r} = \mp v_0 \left(1 - 2 \frac{b_{90}}{r} - \frac{b^2}{r^2} \right)^{1/2}$$

Solution in terms of scattering angle χ ^{8:190}

$$\tan(\frac{\chi}{2}) = \frac{b_{90}}{b} = \frac{q_1 q_2}{4\pi\epsilon_0 m_\mu v_0^2 b}$$

Impact parameter for 90 degree collision $^{8:188}$

$$b_{90} = \frac{q_1 q_2}{4\pi \epsilon_0 m_\mu v_0^2}$$

4.3 Single Particle Collisions with Plasma

a is an approaching test particle; t is a target plasma particle. $Q_{\rm at}$ are quantities depending on approaching particle a incident upon target particle t.

Total loss in test particle linear momentum 8:192

$$\frac{d}{dt}(m_a v_a) = -(\Delta m_a v_a) n_t \sigma v_a$$

$$= -\int (\Delta m_a v_a) f_a(\mathbf{v}_t) |\mathbf{v}_a - \mathbf{v}_t| b \, db \, d\alpha \, d^3 v$$

Definition of test particle collision frequency 8:193

$$\frac{d}{dt}(m_a v_a) \equiv -\nu_{at}(m_a v_a)$$

Test particle collision frequency 8:193

$$\nu_{at}(v_a) = \frac{1}{m_a v_a} \int (\Delta m_a v_a) f_t(\mathbf{v}_t) |\mathbf{v}_a - \mathbf{v}_t| b \, db \, d\alpha \, d^3 v$$

4.3.1 Collision Frequencies

Approximated expressions for frequencies hold only for $v_e \sim v_{te} \gg v_{ti}$

Electron-ion 8:197

$$\nu_{ei} = \left(\frac{e^4 n_i \ln \Lambda}{4\pi \epsilon_0^2 m_e m_\mu}\right) \frac{1}{v_e^3 + 1.3 v_{ti}^3} \approx \frac{e^4 n_i \ln \Lambda}{4\pi \epsilon_0^2 m_e^2 v_e^3}$$
$$\approx 8.06 \times 10^5 \frac{n_i \ln \Lambda}{v_e^3} \quad [s^{-1}]$$

Electron-electron 8:197

$$\nu_{ee} = \left(\frac{e^4 n_e \ln \Lambda}{2\pi \epsilon_0^2 m_e^2}\right) \frac{1}{v_e^3 + 1.3 v_{te}^3} \quad [s^{-1}]$$

Ion-ion 8:197

$$\nu_{ii} = \left(\frac{e^4 n_i \ln \Lambda}{2\pi \epsilon_0^2 m_i^2}\right) \frac{1}{v_i^3 + 1.3 v_{ti}^3} \quad [s^{-1}]$$

Ion-electron 8:197

$$\nu_{ie} = \left(\frac{e^4 n_e \ln \Lambda}{4\pi \epsilon_0^2 m_e m_i}\right) \frac{1}{v_i^3 + 1.3 v_{te}^3} \quad [s^{-1}]$$

Collision frequency scalings 8:197

$$u_{ee} \sim \nu_{ei} \qquad \qquad \nu_{ii} \sim \left(\frac{m_e}{m_i}\right)^{1/2} \nu_{ei} \qquad \qquad \nu_{ie} \sim \left(\frac{m_e}{m_i}\right) \nu_{ei}$$

The Coulomb logarithm 8:194

$$\Lambda \approx \frac{12\pi\epsilon_0^{3/2}T_e^{3/2}}{n_e^{1/2}e^3} = 4.9\times 10^7 \frac{T_{\rm kev}^{3/2}}{n_{\rm 20}^{1/2}}$$

where $\ln \Lambda \approx 15 - 20$ for most plasmas.

4.3.2 Collision Times

Electron-ion collision time ^{11:5}

$$\tau_{ei} = \frac{12\pi^{3/2} \epsilon_0^2 m_e^{1/2} T_e^{3/2}}{\sqrt{2} n_i Z_i^2 e^4 \ln \Lambda}$$
$$= 1.09 \times 10^{16} \frac{T_{\text{e, keV}}^{3/2}}{Z_i^2 n_i \ln \Lambda} \quad [s]$$

Ion-ion collision time ^{11:5}

$$\tau_{ii} = \frac{12\pi^{3/2}}{2^{1/2}} \frac{\epsilon_0^2 m_i^{1/2} T_i^{3/2}}{n_i Z_i^4 e^4 \ln \Lambda_i}$$

$$= 4.67 \times 10^{17} \left(\frac{m_i}{m_p}\right)^{1/2} \frac{T_{i, \text{ keV}}^{3/2}}{Z_i^4 n_i \ln \Lambda_i} \quad [s]$$

An ion collision time is sometimes defined to be $\tau_i = \sqrt{2}\tau_{ii}$ Ion-impurity collision time $^{11:177}$

$$\begin{split} \tau_{iI} &= \frac{12\pi^{3/2}}{2^{1/2}} \frac{m_i^{1/2} T_i^{3/2} \epsilon_0^2}{n_I Z_i^2 Z_I^2 e^4 \ln \Lambda} \\ &= 4.67 \times 10^{17} \left(\frac{m_i}{m_p}\right)^{1/2} \frac{T_{i, \text{ keV}}^{3/2}}{Z_i^2 Z_I^2 n \ln \Lambda_i} \quad [s] \end{split}$$

Electron-to-ion energy transfer time

$$R_{\rm ei} = \frac{\frac{3}{2}n\left(T_e - T_i\right)}{\left(\frac{m_i}{2m_e}\tau_e\right)}$$

Thermal equilibration frequency (rate of species a equilibrating to species b) $^{12:34}$

$$\nu_{ab}^{t} = 1.8 \times 10^{-19} \frac{(m_a m_b)^{1/2} Z_a^2 Z_b^2 n_b \ln \Lambda}{(m_a T_b + m_b T_a)^{3/2}} \quad [s^{-1}]$$

For ions and electrons with $T_e \approx T_i = T$, $\nu_{ei} n_e = \nu_{ie} n_i^{-12:34}$

$$\nu_{ei}^t = 3.2 \times 10^{-15} \frac{Z^2 \ln \Lambda}{(m_i/m_p T^{3/2})} \quad [\text{m}^3 \text{s}^{-1}]$$

4.4 Particle Beam Collisions with Plasmas

In this section, plasma density is written as $n_{20} = n/10^{20}$

Beam-electron collision frequency 8:202-203

$$\nu_{be}(v_b) = \left(\frac{Z_b^2 e^4 n_e \ln \Lambda}{4\pi \epsilon_0^2 m_e m_b}\right) \frac{1}{v_b^3 + 1.3 v_{te}^3}$$

$$\approx \frac{1}{3(2\pi)^{3/2}} \frac{Z_b^2 e^4 m_e^{1/2} n_e \ln \Lambda}{\epsilon_0^2 m_b T_e^{3/2}} \quad (v_{te}^3 \gg v_b^3 \text{ only})$$

$$= 100 \frac{n_{20}}{T_{\text{keV}}^{3/2}} \quad [\text{s}^{-1}] \quad (\text{alpha heating only})$$

Beam-ion collision frequency 8:203

$$\nu_{bi}(v_b) = \left(\frac{Z_b^2 e^4 n_i \ln \Lambda}{4\pi \epsilon_0^2 m_\mu m_b}\right) \frac{1}{v_b^3 + 1.3 v_{ti}^3}$$

$$\approx \frac{1}{4\pi} \frac{Z_b^2 e^4 n_i \ln \Lambda}{\epsilon_0^2 m_\mu m_b v_b^3} \quad (v_{ti}^3 \ll v_b^3 \text{ only})$$

$$= 0.94 \frac{n_{20}}{(E_{\text{beam}})_{\text{MeV}}^{3/2}} \quad [\text{s}^{-1}] \quad (\text{alpha heating only})$$

When $\nu_{be} = \nu_{bi}$, $v_b = v_{crit}$ and the beam changes the plasma particle it preferentially damps upon. For $v_b > v_{crit}$, the beam damps on plasma electrons; for $v_b < v_{crit}$, the beam damps on plasma ions. The critical beam energy is calculated as $E_c = 1/2m_{beam}v_{beam}^2 = 14.8(m_{beam}/m_i^{2/3})T_e$. For a 15 keV plasma, the critical energy corresponds to 660 keV.

A high energy beam entering a plasma has energy behavior (purely slowing down on electrons) ^{26:249}

$$E_b = E_{b,0} \left[e^{-3t/\tau_{se}} - \left(\frac{E_c}{E_{b,0}} \right)^{3/2} \left(1 - e^{-3t/\tau_{se}} \right) \right]^{2/3}$$

where $E_{b,0}$ is the initial beam energy and τ_{se} is the slowing down time assuming $v_b < v_{te}$ $^{26:\,246}$

$$\tau_{se} = \frac{3(2\pi)^{3/2} \epsilon_0^2 m_b T_e^{3/2}}{m_e^{1/2} n e^4 \ln \Lambda}$$

Chapter 5

Plasma Parameters and Definitions

In this chapter, all units are SI with the exception of temperature, which is defined in the historical units of eV (electron-volts).

e is the elementary electric charge

Z is atomic (proton) number

m is the particle mass

e and i subscripts refer to electrons and ions, respectively

B is the magnetic field

n is the particle density; $n_{20} = n/10^{20}$

T is temperature; $T_{\text{keV}} = T$ in units of kiloelectron-volts

5.1 Single Particle Parameters

Thermal speed¹

$$v_{te} = \left(\frac{T_e}{m_e}\right)^{1/2} \qquad v_{ti} = \left(\frac{T_i}{m_i}\right)^{1/2}$$

Plasma frequencies [radians/s] 8:135

$$\omega_{pe} = \left(\frac{n_e e^2}{m_e \epsilon_0}\right)^{1/2}$$

$$\omega_{pi} = \left(\frac{n_i (Z_i e)^2}{m_i \epsilon_0}\right)^{1/2}$$

Cyclotron frequencies [radians/s] ^{8:134}

$$\Omega_e = \frac{eB}{m_e} \qquad \qquad \Omega_i = \frac{Z_i eB}{m_i}$$

¹Some references define thermal speed with an additional factor of $\sqrt{2}$. The definition given here results in v_t being the standard deviation of a Gaussian distribution, which is the widely used convention in statistics and mathematical physics. In either case, it's just a question of how the factor of "1/2" in the exponential term of the Gaussian distribution is treated.

Gyro radii [m] $^{8:\,134}$

$$\rho_{Le} = \frac{(2m_e T_e)^{1/2}}{eB}$$
 $\rho_{Li} = \frac{(2m_i T_i)^{1/2}}{Z_i eB}$

Single particle parameters as functions of magnetic field B [T], density n_{20} [m⁻³], and temperature T [keV] ³

Particle	Plasma frequencies $\begin{bmatrix} \omega \\ f \end{bmatrix}$	Cyclotron frequencies $\begin{bmatrix} \omega \\ f \end{bmatrix}$	Gyro radii [m]
electron	$5.641 \times 10^{11} \ n_{20}^{1/2} \ \text{rad/s}$ $89.779 \ n_{20}^{1/2} \ \text{GHz}$	$1.759 \times 10^{11} \ B \ rad/s$ $28.000 \ B \ GHz$	$1.066 \times 10^{-4} \frac{T_{\text{keV}}^{1/2}}{B}$
proton	$1.316 \times 10^{10} \; n_{20}^{1/2} \; \mathrm{rad/s} \\ 2.094 \; n_{20}^{1/2} \; \mathrm{GHz}$	$9.579 \times 10^7~B~\mathrm{rad/s}$ $15.241~B~\mathrm{MHz}$	$4.570 \times 10^{-3} \frac{T_{\text{keV}}^{1/2}}{B}$
deuteron	$9.312 \times 10^9 \ n_{20}^{1/2} \ \mathrm{rad/s}$ $1.482 \ n_{20}^{1/2} \ \mathrm{GHz}$	$4.791 \times 10^7~B~{\rm rad/s}$ $7.626~B~{\rm MHz}$	$6.461 \times 10^{-3} \frac{T_{\text{keV}}^{1/2}}{B}$
triton	$7.609 \times 10^9 \ n_{20}^{1/2} \ \mathrm{rad/s}$ $1.211 \ n_{20}^{1/2} \ \mathrm{GHz}$	$3.200 \times 10^7~B~{ m rad/s}$ $5.092~B~{ m MHz}$	$7.906 \times 10^{-3} \frac{T_{\text{keV}}^{1/2}}{B}$
helion	$7.610 \times 10^9 \; n_{20}^{1/2} \; \mathrm{rad/s} \\ 1.211 \; n_{20}^{1/2} \; \mathrm{GHz}$	$6.400\times10^7~B~{\rm rad/s}$ $10.186~B~{\rm MHz}$	$3.952 \times 10^{-3} \frac{T_{\text{keV}}^{1/2}}{B}$
alpha	$6.605 \times 10^9 \ n_{20}^{1/2} \ \mathrm{rad/s}$ $1.051 \ n_{20}^{1/2} \ \mathrm{GHz}$	$4.822 \times 10^7~B~{\rm rad/s}$ $7.675~B~{\rm MHz}$	$4.554 \times 10^{-3} \frac{T_{\text{keV}}^{1/2}}{B}$

5.2 Plasma Parameters

Debye length 8:125

$$\frac{1}{\lambda_D^2} = \frac{1}{\lambda_{De}^2} + \frac{1}{\lambda_{Di}^2} = \frac{e^2 n_0}{\epsilon_0 T_e} + \frac{e^2 n_0}{\epsilon_0 T_i}$$

$$\lambda D_e \approx \left(\frac{\epsilon_0 T_e}{e^2 n_0}\right)^{1/2} = 2.35 \times 10^{-5} \left(\frac{T_{\text{keV}}}{n_{20}}\right)^{1/2} \quad [\text{m}]$$

Debye-shield ion potential (spherical coordinates) ^{26:37}

$$V = \frac{e}{4\pi\epsilon_0 r} e^{-r/\lambda_D}$$

Volume of a Debye sphere ³

$$\mathcal{V}_D = \frac{4}{3}\pi\lambda_D^3$$

Plasma parameter 8:133

$$\Lambda_D = \mathcal{V}_D n_0 = \frac{4}{3} \pi \left(\frac{\epsilon_0 T_e}{e^2 n_0} \right)^{3/2} n_0 \approx 5.453 \times 10^6 \frac{T_{\text{keV}}^{3/2}}{n_{20}^{1/2}}$$

Effective plasma charge ^{8:56}

$$Z_{\text{eff}} = \frac{\sum\limits_{\text{all ions}} n_j Z_j^2}{\sum\limits_{\text{all ions}} n_j Z_j} = \frac{1}{n_e} \sum\limits_{\text{all ions}} n_j Z_j^2$$

5.3 Plasma Speeds

In this section, ρ_0 is the mass density of the plasma, p_0 is the plasma pressure, and γ is the adiabatic index.

Alfvén speed 8:314

$$v_a = (B_0^2/\mu_0 \rho_0)^{1/2}$$

Sound speed 5:96,67

$$c_{\rm s} pprox \left(rac{ZT_{
m e} + \gamma T_{
m i}}{m_{
m i}}
ight)^{1/2}$$

where

 $\gamma = 1$ (isothermal flow)

$$\gamma = \frac{2+N}{N}$$
 (N is the number of degrees of freedom)

Plasma mach number ^{5: 298}

$$M \equiv \frac{v_{\text{plasma}}}{c_c}$$

5.4 Fundamentals of Maxwellian Plasmas

General Maxwellian velocity distribution function $^{21:64-65}$

$$\mathcal{F}_M(v_x, v_y, v_z) = \mathcal{F}_M(\mathbf{v}) = C \exp\left(-\frac{bm}{2} \left[(v_x - a_x)^2 + (v_y - a_y)^2 + (v_z - a_z)^2 \right] \right)$$

where a_x , a_y , a_z , b, and c are constants. If $a_x = a_y = a_z = 0$ we have an (ordinary) Maxwellian; otherwise we have a *drifting* Maxwellian where the drift (or mean) velocity is $\mathbf{v}_{dr} = (a_x, a_y, a_z)$.

Ordinary Maxwellian velocity distribution function for a plasma $^{21:64-65}$

$$\mathcal{F}_M(\mathbf{v}) = n \left(\frac{m}{2\pi T}\right)^{3/2} \exp\left(-\frac{m}{2T} \left(v_x^2 + v_y^2 + v_z^2\right)\right)$$

Definition of temperature in a Maxwellian plasma ^{21:66}

$$\frac{3}{2}nT \equiv n\left\langle \frac{1}{2}m(v_x^2 + v_y^2 + v_z^2) \right\rangle \equiv \int \mathcal{F}_M(\mathbf{v}) \left(\frac{1}{2} \left(v_x^2 + v_y^2 + v_z^2 \right) \right) d\mathbf{v}$$

Total number density of particles in a Maxwellian plasma ^{21:66}

$$n = \int_{\substack{all \\ velocity \\ space}} \mathcal{F}_M(\mathbf{v}) \, d\mathbf{v} = 4\pi \int_0^\infty w^2 \mathcal{F}_M(w) \, dw$$

where we have transformed to spherical coordinates such that $d\mathbf{v} = w^2 \sin\theta \, dw \, d\theta \, d\phi$ and $w = (v_x^2 + v_y^2 + v_z^2)^{1/2}$.

Average (thermal) particle speed in a Maxwellian plasma ^{21:67}

$$\bar{c} \equiv \frac{1}{n} \int_{0}^{\infty} w \mathcal{F}_{M}(w) dw = \left(\frac{8T}{\pi m}\right)^{1/2}$$

Thermal particle flux in a single dimension x for a Maxwellian plasma $^{21:67}$

$$\Gamma \equiv \int_{0}^{\infty} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} v_x \, \mathcal{F}_M(\mathbf{v}) \, dv_x \, dv_y \, dv_z = \frac{1}{4} n \bar{c}$$

5.5 Definition of a Magnetic Fusion Plasma

A fusion plasma is defined as an electrically conducting ionized gas that is dominated by collective effects and that magnetically confines its composing particles. If L is the macroscopic length scale of the plasma, $\omega_{\rm transit}$ is 1 over the time required for a particle to cross the plasma, and v_T is the thermal particle velocity, the criteria to be a fusion plasma are: ^{8:136}

Required condition	Physical consequence
$\lambda_D \ll L$	Shielding of DC electric fields
$\omega_{pe} \gg \omega_{\mathrm{transit}} = v_{te}/L$	Shielding of AC electric fields
$\Lambda_D\gg 1$	Collective effects dominate
$ \rho_{Li} \ll L $	Magnetic confinment of particle orbits
$\Omega_i \gg v_{ti}/L$	Particle gyro orbits dominate free streaming

5.6 Fundamental Plasma Definitions

5.6.1 Resistivity

Plasma resistivity of an unmagnetized plasma ^{5:179,183}

$$\eta = \frac{m_e}{n_e e^2 \tau_c} \approx 5.2 \times 10^{-5} \frac{Z_{\text{eff}} \ln \Lambda}{T_{\text{eV}}^{3/2}} \quad [\Omega \cdot \text{m}]$$

Spitzer resistivity of a singly charged unmagnetized plasma ^{26:71}

$$\eta_s = 0.51 \frac{m_e}{n_e e^2 \tau_e} = 0.51 \frac{m_e^{1/2} e^2 \ln \Lambda}{3\epsilon_0^2 (2\pi T_e)^{3/2}}$$

$$\approx 1.65 \times 10^{-9} \frac{\ln \Lambda}{T_{\rm e, \ keV}^{3/2}} \quad [\Omega \cdot \text{m}]$$

Spitzer resistivity of a singly charged magnetized plasma ^{26:71}

$$\eta_{s,\parallel \text{ to B}} = \eta_s$$
 $\eta_{s,\perp \text{ to B}} = 1.96 \eta_s$

Spitzer resistivity of a plasma with impurities ^{26:72}

$$\eta_s = Z_{\text{eff}} \eta_s$$

Spitzer resistivity of a pure non-hydrogenic plasma of charge $Z^{26:72}$

$$\eta(Z) = N(Z)Z\eta_s$$
 where
$$\begin{cases}
N = 0.85 \text{ for } Z = 2 \\
N = 0.74 \text{ for } Z = 4
\end{cases}$$

5.6.2 Runaway Electrons

Volumetric runaway electron production rate ^{26:74}

$$R = \frac{2}{\sqrt{\pi}} \frac{n}{\tau_{\rm se}} \left(\frac{E}{E_D}\right)^{1/2} exp \left[-\frac{E_D}{4E} - \left(\frac{2E_D}{E}\right)^{1/2} \right]$$

where the Driecer electric field, E_D is $^{26:74}$

$$E_D = \frac{ne^3 \ln \Lambda}{4\pi \epsilon_0^2 m_e v_{te}^2}$$
$$\approx 4.582 \times 10^6 \frac{n \ln \Lambda}{v_{te}^2} \quad [V/m]$$

and the electron slowing down time, τ_{se} , for $v_e \gg v_{te}$ is ^{26:74}

$$\tau_{se} = \frac{4\pi\epsilon_0^2 m_e^2 v_e^3}{ne^4 \ln \Lambda}$$
$$\approx 1.241 \times 10^{-6} \frac{v_e^3}{n \ln \Lambda} \quad [s]$$

Relativistic runaway electron limit (Connor-Hastie limit) ^{26:74}

$$E < \frac{ne^3 \ln \Lambda}{4\pi\epsilon_0^2 m_e c^2}$$
$$\approx 4.645 \times 10^{-53} \frac{n \ln \Lambda}{m_e}$$

Chapter 6

Plasma Models

In this chapter, all units are SI with the exception of temperature, which is defined in the historical units of eV (electron-volts).

u is the plasma flow velocity

 ${f v}$ is the particle velocity vector

a is the particle acceleration vector

m is the particle mass

 α is a general particle

 n_{α} is the number density of particle α

 ρ is the plasma mass density

p is the plasma pressure

a and R_0 are the minor and major radius of a toroidal plasma

 κ is the plasma elongation

e is the fundamental charge unit

i and e subscripts refer to the ions and electrons, respectively

6.1 Kinetic

The kinetic Vlasov equation ^{7:10}

$$\frac{\partial f}{\partial t} + \mathbf{v} \cdot \nabla f + \mathbf{a} \cdot \nabla_v f = \mathcal{C}(f)$$

where C(f) is the integro-differential collision operator.

The collisionless kinetic Vlasov equation

$$\frac{\partial f}{\partial t} + \mathbf{v} \cdot \nabla f + \frac{q}{m} \left(\mathbf{E} + \mathbf{v} \times \mathbf{B} \right) \cdot \nabla_v f = 0$$

where in a Maxwellian distribution^{8:46}

$$f = \frac{1}{(\pi v_t)^{3/2}} \exp(-v^2/2v_t^2)$$

6.2 Two Fluids

Continuity equation 7:15

$$\left(\frac{dn_{\alpha}}{dt}\right)_{\alpha} + n_{\alpha}\nabla \cdot \mathbf{v}_{\alpha} = 0$$

Momentum equation $^{7:15}$

$$n_{\alpha}m_{\alpha}\left(\frac{d\mathbf{v}}{dt}\right)_{\alpha}-q_{\alpha}n_{\alpha}\left(\mathbf{E}+\mathbf{v}_{\alpha}\times\mathbf{B}\right)+\nabla\cdot\overleftrightarrow{\mathbf{P}}_{\alpha}=\mathbf{R}_{\alpha}$$

Energy equation $^{7:15}$

$$\frac{3}{2}n_{\alpha}\left(\frac{dT_{\alpha}}{dt}\right)_{\alpha} + \overrightarrow{\mathbf{P}}_{\alpha} : \nabla \mathbf{v}_{\alpha} + \nabla \cdot \mathbf{h}_{\alpha} = Q_{\alpha}$$

Maxwell's equations 7:15

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}$$

$$\nabla \times \mathbf{B} = \mu_0 \left(Zen_i \mathbf{v}_i - en_e \mathbf{v}_e \right) + \frac{1}{c^2} \frac{\partial \mathbf{E}}{\partial t}$$

$$\nabla \cdot \mathbf{E} = \frac{e}{\epsilon_0} \left(n_i - n_e \right)$$

$$\nabla \cdot \mathbf{B} = 0$$

where

Convective derivative 7:14

$$\left(\frac{d}{dt}\right) \equiv \frac{\partial}{\partial t} + \mathbf{v}_{\alpha} \cdot \nabla$$

Heat generated by unlike collision 7:13

$$Q_{\alpha} \equiv \int \frac{1}{2} m_{\alpha} w_{\alpha}^2 C_{\alpha\beta} \, d\mathbf{w}$$

Mean momentum transfer from unlike particles 7:14

$$\mathbf{R}_{\alpha} \equiv \int m_{\alpha} \mathbf{w} C_{\alpha\beta} \, d\mathbf{w}$$

Heat flux due to random motion 7:14

$$\mathbf{h}_{\alpha} \equiv \frac{1}{2} n_{\alpha} m_{\alpha} \left\langle w^2 \mathbf{w} \right\rangle$$

Temperature 7:14

$$T_{\alpha} \equiv p_{\alpha}/n_{\alpha}$$

Anisotropic part of pressure tensor 7:14

$$\overleftrightarrow{\mathbf{\Pi}}_{\alpha} \equiv \overleftrightarrow{\mathbf{P}}_{\alpha} - p_{\alpha} \overleftrightarrow{\mathbf{I}}$$

Pressure tensor ^{7:14}

$$\overrightarrow{\mathbf{P}}_{\alpha} \equiv n_{\alpha} m_{\alpha} \langle \mathbf{w} \mathbf{w} \rangle$$

Scalar pressure 7:14

$$p_{\alpha} \equiv \frac{1}{3} n_{\alpha} m_{\alpha} \left\langle w^2 \right\rangle$$

Collision operator 7:11

$$\mathcal{C}(f) = \sum_{\beta} C_{\alpha\beta}$$

Macroscopic number density

$$n_{\alpha}(\mathbf{r},t) \equiv \int f_{\alpha} d\mathbf{u}$$

Macroscopic fluid velocity

$$\mathbf{v}_{\alpha}(\mathbf{r},t) \equiv \frac{1}{n_{\alpha}} \int \mathbf{u} f_{\alpha} d\mathbf{u}$$

Velocity representing thermal motion of the particles

$$\mathbf{w} = \mathbf{u} - \mathbf{v}_{\alpha}(\mathbf{r}, t)$$

Relations involving the collision operators C_{ij} 7:11

(a)
$$\int C_{ee} d\mathbf{u} = \int C_{ii} d\mathbf{u} = \int C_{ei} d\mathbf{u} = \int C_{ie} d\mathbf{u} = 0$$

(b)
$$\int m_e \mathbf{u} \mathcal{C}_{ee} d\mathbf{u} = \int m_i \mathbf{u} \mathcal{C}_{ii} d\mathbf{u} = 0$$

(c)
$$\int \frac{1}{2} m_e u^2 \mathcal{C}_{ee} d\mathbf{u} = \int \frac{1}{2} m_i u^2 \mathcal{C}_{ii} d\mathbf{u} = 0$$

(d)
$$\int (m_e \mathbf{u} \mathcal{C}_{ei} + m_i \mathbf{u} \mathcal{C}_{ie}) \ d\mathbf{u} = 0$$

(e)
$$\int \frac{1}{2} \left(m_e u^2 \mathcal{C}_{ei} + m_i u^2 \mathcal{C}_{ie} \right) d\mathbf{u} = 0$$

6.3 One Fluid

Taking the two fluid equation, we assume $m_e \to 0$ and $n_i = n_e \equiv n$ so that 7:17

$$\rho = m_i n$$

$$\mathbf{v} = \mathbf{v}_i$$

$$\mathbf{v}_e = \mathbf{v} - \mathbf{J}/en$$

Additional simplifications $p=nT=p_e+p_i$ and $T=T_e+T_i$ lead to the one-fluid equations $^{7:\,18}$

Continuity of mass equation 7:18

$$\frac{\partial \rho}{\partial t} + \nabla \cdot \rho \mathbf{v} = 0$$

Continuty of charge equation 7:18

$$\nabla \cdot \mathbf{J} = 0$$

Momentum equation $^{7:18}$

$$\rho \frac{d\mathbf{v}}{dt} - \mathbf{J} \times \mathbf{B} + \nabla p = -\nabla \cdot (\overleftarrow{\mathbf{\Pi}}_i + \overleftarrow{\mathbf{\Pi}}_e)$$

Force balance 7:19

$$\mathbf{E} + \mathbf{v} \times \mathbf{B} = \frac{1}{en} \left(\mathbf{J} \times \mathbf{B} - \nabla p_e - \nabla \cdot \overleftrightarrow{\mathbf{\Pi}}_e \mathbf{R}_e \right)$$

Equations of state 7:19

$$\frac{d}{dt} \left(\frac{p_i}{\rho^{\gamma}} \right) = \frac{2}{3\rho^{\gamma}} \left(Q_i - \nabla \cdot \mathbf{h}_i - \overleftrightarrow{\mathbf{\Pi}}_i : \nabla \mathbf{v} \right)$$

$$\frac{d}{dt}\left(\frac{p_e}{\rho^{\gamma}}\right) = \frac{2}{3\rho^{\gamma}}\left[Q_e - \nabla \cdot \mathbf{h}_e - \overleftrightarrow{\mathbf{\Pi}}_e : \nabla\left(\mathbf{v} - \frac{\mathbf{J}}{en}\right)\right] + \frac{1}{en}\mathbf{J} \cdot \nabla\left(\frac{p_e}{\rho^{\gamma}}\right)$$

Maxwell's equation (low frequency limit) 7:19

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J}$$

$$\nabla \cdot \mathbf{B} = 0$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}$$

53

6.4 Magnetohydrodynamics (MHD)

MHD scalings $^{8:247}$

length : $a >> \rho_{Li} >> [\rho_{Le} \sim \lambda_{De}]$

frequency : $\bar{\nu}_{e1} << v_{ti}/a << \omega_{ci} << [\omega_{ce} \sim \omega_{pe}]$

velocity : $v_{ti} \sim v_a << v_{te} << c$

where a is the tokomak minor radius.

The MHD equations

Continuity of mass^{8:252}

$$\frac{d\rho}{dt} + \rho \nabla \cdot \mathbf{v} = 0$$

Momentum equation 8: 252

$$\rho \frac{d\mathbf{v}}{dt} = \mathbf{J} \times \mathbf{B} - \nabla p$$

Ohm's law 8:252

$$\mathbf{E} + \mathbf{v} \times \mathbf{B} = 0$$
 (ideal MHD)

$$\mathbf{E} + \mathbf{v} \times \mathbf{B} = \eta_{||} \mathbf{J}$$
 (resistive MHD)

Equation of state^{8:252}

$$\frac{d}{dt}\left(\frac{p}{\rho^{\gamma}}\right) = 0$$

Maxwell's equation (low frequency limit)^{8:252}

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J}$$

$$\nabla \cdot \mathbf{B} = 0$$

where $\eta_{||}$ is the parallel resistivity.

6.4.1 Frozen-in Magnetic Field

In ideal MHD, it is found that 8:300

$$\frac{d\Phi}{dt} = 0$$

where $\Phi = \int \mathbf{B} \cdot d\mathbf{S}$ is the magnetic flux.

Case	Current Relation	Equilibrium Relation
θ-pinch 8: 265 z-pinch 8: 267	$\mu_0 J_\theta = -\frac{dB_z}{dr}$ $\mu_0 J_z = \frac{1}{r} \frac{d(rB_\theta)}{dr}$	$\frac{d}{dr}\left(p + \frac{B_z^2}{2\mu_0}\right) = 0$ $\frac{d}{dr}\left(p + \frac{B_\theta^2}{2\mu_0}\right) + \frac{B_\theta^2}{\mu_0 r} = 0$ $\frac{d}{dr}\left(p + \frac{B_\theta^2}{2\mu_0} + \frac{B_z^2}{2\mu_0}\right) + \frac{B_\theta^2}{\mu_0 r} = 0$
screw pinch 8:269	$\mu_0 \mathbf{J} = -\frac{dB_z}{dr} \hat{\boldsymbol{\theta}} + \frac{1}{r} \frac{d(rB_{\theta})}{dr} \hat{\mathbf{z}}$	$\frac{d}{dr} \left(p + \frac{B_{\theta}^2}{2\mu_0} \right) + \frac{\mu_0 r}{\mu_0 r} $ $\frac{d}{dr} \left(p + \frac{B_{\theta}^2}{2\mu_0} + \frac{B_z^2}{2\mu_0} \right) + \frac{B_{\theta}^2}{\mu_0 r} = 0$

MHD relations for linear plasma devices

6.5 MHD Equilibria

The generalized MHD equilibrium equations 8:261

$$\mathbf{J} \times \mathbf{B} = \nabla p \qquad \qquad \nabla \times \mathbf{B} = \mu_0 \mathbf{J} \qquad \qquad \nabla \cdot \mathbf{B} = 0$$

6.6 Grad-Shafranov Equation

The Grad-Shafranov equation is the solution of the ideal MHD equations in two dimensions. In this section, A_{ϕ} is the toroidal component of the vector potential. ^{7:110-111}

$$\Delta^* \psi = -\mu_0 R^2 \frac{dp}{d\psi} - F \frac{dF}{d\psi}$$

where

$$\mathbf{B} = \frac{1}{R} \nabla \psi \times \hat{\boldsymbol{\phi}} + F/R\hat{\boldsymbol{\phi}}$$

$$\mu_0 \mathbf{J} = \frac{1}{R} \frac{dF}{d\psi} \nabla \psi \times \hat{\boldsymbol{\phi}} - \frac{1}{R} \Delta^* \psi \hat{\boldsymbol{\phi}}$$

where

$$\Delta^* \psi \equiv R \frac{\partial}{\partial R} \left(\frac{1}{R} \frac{\partial \psi}{\partial R} \right) + \frac{\partial^2 \psi}{\partial Z^2}$$
$$\psi = \frac{\psi_p}{2\pi} = RA_\phi = \frac{1}{2\pi} \int \mathbf{B}_p \cdot d\mathbf{A}$$
$$F(\psi) = RB_\phi$$

6.7 MHD Stability

This section deals with how a plasma behaves when it is perturbed slightly from equilibrium. Therefore, most physical parameters have an equilibrium value (subscript 0) with an added perturbed value (subscript 1). We also define the displacement vector $\boldsymbol{\xi} = \int \tilde{v_1}$. 8:311

Full Solutions to the Grad-Shafranov Equation

Geometry	Solution	
High β Noncircular Tokamak $7:148$	$\frac{A}{4}r^2 + \frac{C}{8}r^3\cos(\theta) + \sum_{m=0}^{\infty} H_m r^m \cos(m\theta)$	
Spherical Tokamak ^{7:163}	$-\frac{A}{2}Z^{2} + \frac{C}{8}R^{4} + c_{1} + c_{2}R^{2} + c_{3}\left(R^{4} - 4R^{2}Z^{2}\right)$	

$$\tilde{\rho}_{1} = -\nabla \cdot \left(\rho_{0}\tilde{\boldsymbol{\xi}}\right)
\tilde{p}_{1} = -\tilde{\boldsymbol{\xi}} \cdot \nabla p_{0} - \gamma p_{0} \nabla \cdot \tilde{\boldsymbol{\xi}}
\tilde{\mathbf{Q}} \equiv \tilde{\mathbf{B}}_{1} = \nabla \times \left(\tilde{\boldsymbol{\xi}} \times \mathbf{B}_{0}\right)
\rho \frac{\partial^{2}\tilde{\boldsymbol{\xi}}}{\partial t^{2}} = \mathbf{F}(\tilde{\boldsymbol{\xi}})
\mathbf{F}(\tilde{\boldsymbol{\xi}}) = \mathbf{J} \times \tilde{\mathbf{B}}_{1} + \tilde{\mathbf{J}}_{1} \times \mathbf{B} - \nabla \tilde{p}_{1}
\mathbf{F}(\tilde{\boldsymbol{\xi}}) = \frac{1}{\mu_{0}} (\nabla \times \mathbf{B}) \times \tilde{\mathbf{Q}} + \frac{1}{\mu_{0}} (\nabla \times \tilde{\mathbf{Q}}) \times \mathbf{B} + \nabla (\tilde{\boldsymbol{\xi}} \cdot \nabla p + \gamma p \nabla \cdot \tilde{\boldsymbol{\xi}})$$

Then assuming all pertubed quantities $Q_1 = Q_1 \exp\left[-i\left(\omega t - \mathbf{k} \cdot \mathbf{r}\right)\right]$, we can find expressions for the first order terms by letting $\frac{\partial}{\partial t} \to \omega$ and $\nabla \to \mathbf{k}$.

6.7.1 Variational Formulation

A different way of looking at the stability problem is given by $^{7:250}$

$$\omega^2 = \frac{\delta W(\boldsymbol{\xi}^*, \boldsymbol{\xi})}{K(\boldsymbol{\xi}^*, \boldsymbol{\xi})}$$

where

$$\begin{split} \delta W(\boldsymbol{\xi}^*, \boldsymbol{\xi}) &= -\frac{1}{2} \int \boldsymbol{\xi}^* \cdot \mathbf{F}(\boldsymbol{\xi}) d\mathbf{r} \\ &= -\frac{1}{2} \int \boldsymbol{\xi}^* \cdot \left[\frac{1}{\mu_0} (\nabla \times \mathbf{Q}) \times \mathbf{B} + \frac{1}{\mu_0} (\nabla \times \mathbf{B}) \right. \\ &\times \mathbf{Q} + \nabla (\gamma p \nabla \cdot \boldsymbol{\xi} + \boldsymbol{\xi} \cdot \nabla p) \right] d\mathbf{r} \\ &K(\boldsymbol{\xi}^*, \boldsymbol{\xi}) &= \frac{1}{2} \int \rho |\boldsymbol{\xi}|^2 d\mathbf{r} \end{split}$$

An equilibrium is stable if $\delta W \geq 0$. The energy principle can be evaluated simply in two cases: a conducting wall directly in contact to the plasma $(\mathbf{n} \cdot \boldsymbol{\xi}_{\perp}(r_{wall}) = 0)$ or with a vacuum region next to the plasma. A vacuum region is more realistic than an adjacent conducting wall, so the variational principle becomes $\delta W = \delta W_F + \delta W_S + \delta W_V$, where F, S, V refer to fluid, surface, and vacuum, respectively.

$$\begin{split} \delta W_F &= \frac{1}{2} \int_F d\mathbf{r} \left[\frac{|\mathbf{Q}|^2}{\mu_0} - \boldsymbol{\xi}_{\perp}^* \cdot (\mathbf{J} \times \mathbf{Q}) + \gamma p |\nabla \cdot \boldsymbol{\xi}|^2 + (\boldsymbol{\xi}_{\perp} \cdot \nabla p) \nabla \cdot \boldsymbol{\xi}_{\perp}^* \right] \\ \delta W_S &= \frac{1}{2} \int_S dS |\mathbf{n} \cdot \boldsymbol{\xi}_{\perp}|^2 \mathbf{n} \cdot \left\| \nabla \left(p + \frac{B^2}{2\mu_0} \right) \right\| \\ \delta W_V &= \frac{1}{2} \int_V d\mathbf{r} \frac{|\hat{\mathbf{B}}_1|^2}{\mu_0} \\ \mathbf{n} \cdot \hat{\mathbf{B}}_1|_{r_w} &= 0 \\ \mathbf{n} \cdot \hat{\mathbf{B}}_1|_{r_w} &= \mathbf{n} \cdot \nabla \times \left(\boldsymbol{\xi}_{\perp} \times \hat{\mathbf{B}} \right) |_{r_p} \end{split}$$

where ||A|| refers to the jump in A from the vacuum to the plasma.

6.8 Stability of the Screw Pinch

The general screw pinch stability with a vacuum region is given by two different expressions. For internal modes, ^{7:293}

$$\delta W = \frac{2\pi^2 R_0}{\mu_0} \int_0^a (f\xi'^2 + g\xi^2) dr$$

with $\xi(a) = 0$. For external modes, ^{7:293}

$$\delta W = \frac{2\pi^2 R_0}{\mu_0} \left\{ \int_0^a (f\xi'^2 + g\xi^2) dr + \left[\left(\frac{krB_z - mB_\theta}{k_0^2 r^2} \right) rF + \frac{r^2 \Lambda F^2}{|m|} \right]_a \xi_a^2 \right\}$$

where ξ_a is arbitrary and

$$f = \frac{rF^2}{k_0^2}$$

$$g = 2\frac{k^2}{k_0^2} (\mu_0 p)' + \left(\frac{k_0^2 r^2 - 1}{k_0^2 r^2}\right) r F^2 + 2\frac{k^2}{r k_0^4} \left(kB_z - \frac{mB_\theta}{r}\right) F$$

$$\Lambda = -\frac{|m|K_a}{kaK_a'} \left[\frac{1 - (K_b'I_a)/(I_b'K_a)}{1 - (K_b'I_a')/(I_b'K_a')} \right]$$

$$F = \mathbf{k} \cdot \mathbf{B} = \frac{mB_{\theta}}{r} + kB_z$$

6.8.1 Suydam's Criterion

For stability in a screw pinch $^{7:298}$

$$\frac{rB_z^2}{\mu_0} \left(\frac{q'}{q}\right)^2 + 8p' > 0$$

Chapter 7

Transport

In this chapter, all units are SI with the exception of temperature, which is defined in the historical units of eV (electron-volts).

```
e is the elementary electric charge Z is the atomic (proton) number m is the particle mass n is the number density; n_{20} = n/10^{20} \mathbf{v} is the particle velocity vector \rho is the plasma mass density T is the plasma temperature \chi is the thermal diffusivity q is the heat flux || and \perp indicate parallel and perpendicular to \mathbf{B} a and R_0 are the minor and major radii of a toroidal plasma S is a general source term
```

7.1 Classical Transport

7.1.1 Diffusion Equations in a 1D Cylindrical Plasma

If the following approximations are made to the MHD single fluid equations $8\!:\!451\!-\!453$

- (a) neglect inertial terms: $\rho \frac{\partial \mathbf{v}}{\partial t} = 0$
- (b) split resistivity into components: $\eta {\bf J} \to \eta_\perp {\bf J}_\perp + \eta_\parallel {\bf J}_\parallel$
- (c) equate electron and ion temperature: $T_e \approx T_i \equiv T$
- (d) introduce the low- β tokamak expansion: $B_z(r,t) = B_0 + \delta B_z(r,t)$ where B_0 is a constant and $\delta B_z \ll 1$

then a short calculation leads a set of diffusion-like transport equations

Particles 8:453

$$\frac{\partial n}{\partial t} = \frac{1}{r} \frac{\partial}{\partial r} \left[r D_n \left(\frac{\partial n}{\partial r} + \frac{n}{T} \frac{\partial T}{\partial r} + \frac{2\eta_{\parallel}}{\beta_p \eta_{\perp}} \frac{n}{r B_{\theta}} \frac{\partial (r B_{\theta})}{\partial r} \right) \right] \quad D_n = \frac{2n T \eta_{\perp}}{B_0^2}$$

where the poloidal beta is $\beta_p = 4\mu_0 nT/B_\theta^2 \sim 1$

Temperature 8:453

$$3n\frac{\partial T}{\partial t} = \frac{1}{r}\frac{\partial}{\partial r}\left(rn\chi\frac{\partial T}{\partial r}\right) + S$$

Magnetic field 8:453

$$\frac{\partial (rB_{\theta})}{\partial t} = r \frac{\partial}{\partial r} \left(\frac{D_B}{r} \frac{\partial (rB_{\theta})}{\partial r} \right) \qquad D_B = \frac{\eta_{\parallel}}{\mu_0}$$

7.1.2 Classical Particle Diffusion Coefficients

Classical particle diffusion results from coulomb collisions. No shift in the center of mass occurs for like-particle collisions; therefore, D=0 for like-particles and only unlike-particle collisions lead to particle diffusion, implying $D_n^{electrons}=D_n^{ions}$.

Net momentum electron-ion exchange collision frequency 8:217

$$\bar{\nu}_{ei} = \sqrt{\frac{2}{\pi}} \frac{\omega_{pe}}{\Lambda} \ln \Lambda \approx 1.8 \times 10^5 \frac{n_{20}}{T_{\text{keV}}^{3/2}}$$

Random walk diffusion coefficient 8:462

$$D_{\rm rw} = 4 \frac{\bar{\nu}_{ei} m_e T_e}{e^2 B_0^2} \sim \frac{r_{Le}^2}{\bar{\tau}_{ei}}$$

Fluid model diffusion coefficient 8:463

$$D_{\rm fm} = \frac{2nT\eta_{\perp}}{B_0^2} = 2\frac{\bar{\nu}_{ei}m_eT_e}{e^2B_0^2}$$

Braginskii diffusion coefficient 8:463

$$D_{\text{Brag}} = 2.0 \times 10^{-3} \frac{n_{20}}{B_0^2 T_{\text{keV}}^{1/2}} \quad [\text{m}^2/\text{s}]$$

7.1.3 The Collision Operator

In this section, Einstein summation notation $(A_aB_a = \sum_a A_aB_a)$ is used, and $\mathbf{u} \equiv \mathbf{v} - \mathbf{v}'$, and d^3v' is a differential volume element in velocity space. The Fokker-Planck form of the collision operator ^{11:29}

$$C_{ab}(f_a, f_b) = \frac{\partial}{\partial v_k} \left[A_k^{ab} f_a + \frac{\partial}{\partial v_l} (D_{kl}^{ab} f_a) \right]$$

where $^{11:28-29}$

$$A_k^{ab} \equiv \left(1 + \frac{m_a}{m_b}\right) L^{ab} \frac{\partial \phi_b}{\partial v_k}$$

$$D_{kl}^{ab} \equiv -L^{ab} \frac{\partial^2 \psi_b}{\partial \nu_k \partial \nu_l}$$

$$L^{ab} \equiv \left(\frac{Z_a Z_b e^2}{m_a \epsilon_0}\right) \ln \Lambda$$

$$\phi_b(\mathbf{v}) \equiv -\frac{1}{4\pi} \int \frac{1}{u} f_b(\mathbf{v}') d^3 v'$$

$$\psi_b(\mathbf{v}) \equiv -\frac{1}{8\pi} \int u f_b(\mathbf{v}') d^3 v'$$

Rosenbluth form of the collision operator (general) 11:30

$$C_{ab}(f_a, f_b) = -\frac{Z_a^2 Z_b^2 e^4 \ln \Lambda}{8\pi \epsilon_0^2 m_a} \frac{\partial}{\partial v_k} \int U_{kl} \left[\frac{f_a(\mathbf{v})}{m_b} \frac{\partial f_b(\mathbf{v}')}{\partial v_l'} - \frac{f_b(\mathbf{v}')}{m_a} \frac{\partial f_a(\mathbf{v})}{\partial v_l} \right] d^3 v'$$

where $^{11:29}$

$$U_{kl} \equiv \frac{u^2 \delta_{kl} - u_k u_l}{u^3}$$

Rosenbluth form of the collision operator (Maxwellian plasma) 11:37

$$C_{ab}(f_a, f_{b0}) = \nu_D^{ab} \mathcal{L}(f_a) + \frac{1}{v^2} \frac{\partial}{\partial v} \left[v^3 \left(\frac{m_a}{m_a + m_b} \nu_s^{ab} f_a + \frac{1}{2} \nu_{||}^{ab} v \frac{\partial f_a}{\partial v} \right) \right]$$

where $x_{\alpha} = v/v_{Th\alpha}$ and $^{11:38}$

$$\mathcal{L}(f_a) \equiv \frac{1}{2} \left[\frac{1}{\sin \theta} \frac{\partial}{\partial \theta} \left(\sin \theta \frac{\partial f_a}{\partial \theta} \right) + \frac{1}{\sin^2 \theta} \frac{\partial f_a}{\partial \phi} \right]$$

$$G(x) \equiv \frac{\phi(x) - x\phi'(x)}{2x^2} = \begin{cases} \frac{2x}{3\sqrt{\pi}} & x \to 0\\ \frac{1}{2x^2} & x \to \infty \end{cases}$$

$$\nu_D^{ab}(v) = \hat{\nu}_{ab} \frac{\operatorname{erf}(x_b) - G(x_b)}{x_a^3}$$

$$\nu_s^{ab}(v) = \hat{\nu}_{ab} \frac{2T_a}{T_b} \left(1 + \frac{m_b}{m_a} \right) \frac{G(x_b)}{x_a}$$

$$\nu_{||}^{ab}(v) = 2\hat{\nu}_{ab} \frac{G(x_b)}{x_a^3}$$

$$\hat{\nu}_{ab} = \frac{n_b Z_a^2 Z_b^2 e^4 \ln \Lambda}{4\pi \epsilon_0^2 m_a^2 v_{Tha}^3}$$

Krook collision operator 11:84

$$C(f) = \nu(f_0 - f)$$

where ν is chosen as some characteristic collision time and f_0 is a base distribution frequency, which is often chosen to be a Maxwellian.

7.1.4 Classical Thermal Diffusivities

Random walk thermal diffusivities 8:464

$$\chi_i = \frac{1}{4} \frac{v_{ti}^2}{\Omega_i^2 \bar{\tau}_{ii}} \sim \frac{r_{Li}^2}{\bar{\tau}_{ii}}$$

$$\chi_e = \frac{1}{4} \frac{v_{te}^2}{\Omega_e^2 \bar{\tau}_{ee}} \sim \frac{r_{Le}^2}{\bar{\tau}_{ee}}$$

Braginskii Thermal Diffusivity Coefficients (50%-50% D-T plasma) ^{8:465}

$$\chi_i = 0.10 \frac{n_{20}}{B_0^2 T_k^{1/2}} \quad [\text{m}^2/\text{s}]$$

$$\chi_e = 4.8 \times 10^{-3} \frac{n_{20}}{B_0^2 T_{\text{keV}}^{1/2}} \quad [\text{m}^2/\text{s}]$$

7.2 Neoclassical Transport

The following formulae are only valid in the so-called "banana regime" of tokamak confinement devices, where a significant fraction of confined particles undergo magnetic mirroring due to inhomogeneity of the magnetic fields.

7.2.1 Passing Particles

Half-transit time ^{8:480}

$$\tau_{1/2} = \frac{l}{v_{\parallel}} = \frac{\pi R_0 q}{v_{\parallel}}$$

Drift Velocity 8:481

$$\mathbf{v}_D = \frac{m_i}{eB} \left(v_{\parallel}^2 + \frac{v_{\perp}}{2} \right) \frac{\mathbf{R}_c \times \mathbf{B}}{R_c^2 B} \approx \frac{1}{\Omega_i R_0} \left(v_{\parallel}^2 + \frac{v_{\perp}}{2} \right) \left(\hat{\boldsymbol{r}} \sin \theta + \hat{\boldsymbol{\theta}} \cos \theta \right)$$

7.2.2 Trapped Particles

In this section, q is the tokamak safety factor.

The minimum (inboard) and maximum (outboard) magnetic fields 8:484

$$B_{\min} = B_0 \frac{R_0}{R_0 + a} \qquad B_{\max} = B_0 \frac{R_0}{R_0 - a}$$

Trapped particle condition 8:484

$$\frac{v_{\parallel}^2}{v^2} < 1 - \frac{B_{\min}}{B_{\max}} = 1 - \frac{R_0 - a}{R_0 + a} \approx 2\frac{a}{R_0}$$

Fraction of trapped particles (maxwellian distribution \mathcal{F}_{M}) ^{8:485}

$$\mathcal{F}_{\text{trapped}} = \frac{1}{n} \int_{\theta_c}^{\pi - \theta_c} \sin \theta d\theta \int_0^{2\pi} d\phi \int_0^{\infty} \mathcal{F}_{\text{M}}(v) v^2 dv = \cos \theta_c \approx \left(\frac{2a}{R_0}\right)^{1/2}$$

Half-bounce time^{8:487}

$$\tau_{1/2} \approx \frac{l}{v_{||}} \approx \frac{2l}{v_{||}} \approx \frac{2\pi R_0 q}{v_{||}}$$

Full-bounce frequency 8:487

$$\omega_B = \frac{v_{\parallel}}{2R_0 a}$$

Mean square step size (random walk model) 8:488

$$(\Delta l)^2 = \langle (\Delta r)^2 \rangle = 4 \frac{|v_D|^2}{\omega_B^2} \langle \cos^2 \theta_0 \rangle = 2 \frac{q^2 v^4}{\Omega_i^2 v_\parallel^2}$$

Mean step size (averaged over velocity) 8:488

$$(\Delta l)^2 \approx 3 \left(q^2 \frac{R_0}{a}\right) \frac{v_{ti}^2}{\Omega_i^2} \sim \left(q^2 \frac{R_0}{a}\right) \rho_{Li}^2$$

where it has been assumed that

$$v^2 \sim \frac{3T}{m} = \frac{3}{2}v_{ti}^2$$
 $v_{\parallel}^2 \approx \frac{a}{R_0}v^2 \sim \frac{a}{2R_0}3v_{ti}^2$

7.2.3 Trapped Particle Neoclassical Transport Coefficients

Random walk model neoclassical diffusion coefficient 8:489

$$D_n^{NC} = f \frac{\langle (\Delta r)^2 \rangle}{\tau_{\text{eff}}} = 5.2q^2 \left(\frac{R_0}{a}\right)^{3/2} \left(\frac{2m_e T_e}{e^2 B_0^2 \bar{\tau}_{ei}}\right) = 5.2q^2 \left(\frac{R_0}{a}\right)^{3/2} D_n^{CL} \quad [\text{m}^2/\text{s}]$$

Neoclassical diffusion coefficient (Rosenbluth, Hazeltine, and Hinton) 8:489

$$D_n^{NC} = 2.2q^2 \left(\frac{R_0}{a}\right)^{3/2} D_n^{CL}$$

Thermal diffusivities (Rosenbluth, Hazeltine, and Hinton) $^{8:489}$

$$\chi_i^{NC} = 0.68q^2 \left(\frac{R_0}{a}\right)^{3/2} \chi_i^{CL} = 0.068q^2 \left(\frac{R_0}{a}\right)^{3/2} \left(\frac{n_{20}}{B_0^2 T_{\text{keV}}^{1/2}}\right) \quad \text{[m}^2/\text{s]}$$

$$\chi_e^{NC} = 0.89 q^2 \left(\frac{R_0}{a}\right)^{3/2} \chi_e^{CL} = 4.3 \times 10^{-3} q^2 \left(\frac{R_0}{a}\right)^{3/2} \left(\frac{n_{20}}{B_0^2 T_{\rm keV}^{1/2}}\right) \quad [\rm m^2/s]$$

7.2.4 Transport regime criteria

Definition of collisionality $^{11:149}$

$$\nu^* \equiv \nu q R / v_t \epsilon^{3/2}$$

The banana regime $^{11:149}$

$$\nu q R/v_T \ll \epsilon^{3/2}$$

The plateau regime $^{11:149}$

$$\epsilon^{3/2} \ll \nu q R/v_T \ll 1$$

The Pfirsch-Schluter regime ^{11:149}

$$\nu q R/v_T \gg 1$$

Chapter 8

Plasma Waves

In this chapter, all units are SI with the exception of temperature, which is defined in the historical units of eV (electron-volts).

 ${f E}$ and ${f B}$ are the electric and magnetic fields, respectively $\hat{{f b}}$ is a unit vector in the direction of ${f B}$ || and \bot indicate parallel and perpendicular to $\hat{{f b}}$ ${f k}$ is the wave vector

 ω_{pi} is the plasma frequency for particle i Ω_i is the cyclotron frequency for particle i

 \tilde{X} implies that X can be a complex number

8.1 Cold Plasma Electromagnetic Waves

Starting from Maxwell's equation, linearize $Q = \widetilde{Q} \exp(i\mathbf{k} \cdot \mathbf{r} - i\omega t)$, $\mathbf{J} = \overleftarrow{\boldsymbol{\sigma}} \cdot \mathbf{E}$

$$\mathbf{n} \times \mathbf{n} \times \mathbf{E} + \left(\overleftarrow{\mathbf{I}} + \frac{i \overleftarrow{\boldsymbol{\sigma}}}{\epsilon_o \omega} \right) \cdot \mathbf{E} = 0$$

where $\mathbf{n} = c\mathbf{k}/\omega$

By combining this equation with the momentum conservation equations, $\mathbf{J} = \sum_{j} n_{j} q_{j} v_{j}$, setting p = 0, and setting collisionality to 0, it is possible to solve for σ . Plugging in σ and then writing in tensor form with Stix notation,

$$\begin{pmatrix} S - n_{||}^2 & -iD & n_{\perp} n_{||} \\ iD & S - n^2 & 0 \\ n_{\perp} n_{||} & 0 & P - n_{\perp}^2 \end{pmatrix} \begin{pmatrix} E_x \\ E_y \\ E_z \end{pmatrix} = 0$$

where $^{22:7}$

$$\begin{split} S &= 1 - \sum_{j} \frac{\omega_{pj}^2}{\omega^2 - \Omega_{j}^2} \\ D &= \sum_{j} \frac{\Omega_{j}}{\omega} \frac{\omega_{pj}^2}{\omega^2 - \Omega_{j}^2} \\ P &= 1 - \sum_{j} \frac{\omega_{pj}^2}{\omega^2} \\ R &= S + D = 1 - \sum_{j} \frac{\omega_{pj}^2}{\omega \left(\omega + \Omega_{j}\right)} \\ L &= S - D = 1 - \sum_{j} \frac{\omega_{pj}^2}{\omega \left(\omega - \Omega_{j}\right)} \end{split}$$

For a wave propagating at an angle θ to $\hat{\mathbf{b}}$ 22:8

$$An^{4} - Bn^{2} + C = 0$$

$$A = S\sin^{2}\theta + P\cos^{2}\theta$$

$$B = RL\sin^{2}\theta + PS(1 + \cos^{2}\theta)$$

$$C = PRL$$

The equation can be rearranged, conveniently obtaining a handy mnemonic ("P Nar Nal Snarl Nap") $^{22:9}$

$$\tan^2(\theta) = -\frac{P(n^2 - R)(n^2 - L)}{(Sn^2 - RL)(n^2 - P)}$$

For a wave traveling at an angle θ to $\hat{\mathbf{b}}$, the dispersion relation is given by the Appleton-Hartree equation $^{22:38}$

$$n^2 = 1 - \frac{2\omega_{pe}^2 \left(\omega^2 - \omega_{pe}^2\right)}{2\omega^2 \left(\omega^2 - \omega_{pe}^2\right) - \Omega_e^2 \omega^2 \sin^2 \theta \pm \Omega_e \omega^2 \Sigma}$$

$$\Sigma = \left[\Omega_e^2 \sin^4 \theta + 4\omega^4 \left(1 - w_{pe}^2 / \omega^2\right)^2 \cos^2 \theta\right]^{1/2}$$

Polarization of a wave $^{22:10}$

$$\frac{iE_x}{E_y} = \frac{n^2 - S}{D}$$

8.1.1 Common Cold Plasma Waves

Defining special frequencies 5:127 22:29

¹Cutoff/Resonances listed for single ion species plasma

Name	Dispersion Relation ^{5:145}	Type	Resonance	Cutoff ¹
Light Wave	$n^2 = 1 - \sum_j \frac{\omega_{pj}^2}{\omega^2}$	$\mathbf{B}_0 = 0$	NA	ω_{pe}
O wave	$n^2 = P$	$\mathbf{n}\perp\mathbf{B}_0$	NA	ω_{pe}
X wave	$n^2 = RL/S$	$\mathbf{n}\perp\mathbf{B}_0$	ω_{uh}, ω_{lh}	ω_r, ω_l
R wave	$n^2 = R$	$\mathbf{n} \mathbf{B}_0$, right-handed	Ω_e	ω_r
L wave	$n^2 = L$	$\mathbf{n} \mathbf{B}_0$, left-handed	Ω_i	ω_l

$$\omega_R = \frac{\Omega_e + \sqrt{\Omega_e^2 + 4\omega_{pe}^2}}{2}$$

$$\omega_L = \frac{-\Omega_e + \sqrt{\Omega_e^2 + 4\omega_{pe}^2}}{2}$$

$$\omega_{uh}^2 = \omega_p^2 + \Omega_e^2$$

$$\omega_{lh}^2 = \Omega_i^2 + \frac{\omega_{pi}^2}{1 + \omega_{pe}^2/\Omega_e^2}$$

For waves that are almost one of the O, X, L, R waves, with a small angle with respect to the proper propogation direction, we get the following dispersion relations. In these equations, $\alpha = \omega_{pe}^2/\omega^2$. ¹⁹

Wave Name	Dispersion Relation
QT-O	$n^2 \simeq \frac{1-\alpha}{1-\alpha\cos^2\theta}$
QT-X	$n^2 \simeq \frac{(1-\alpha)^2 \omega^2 - \Omega_e^2 \sin^2 \theta}{(1-\alpha)\omega^2 - \Omega_e^2 \sin^2 \theta}$
QL-L	$n^2 \simeq 1 - \frac{\alpha \omega}{\omega + \Omega_e \cos \theta}$
QL-R	$n^2 \simeq 1 - \frac{\alpha \omega}{\omega - \Omega_e \cos \theta}$

8.2 Electrostatic Waves

These are waves with no perturbed magnetic field. The dispersion relation can be derived by combining Gauss's law, momentum conservation, and continuity equations. It is important to note that $\mathbf{k}||\mathbf{E}|$. Let \mathbf{k} lie in the (\mathbf{x},\mathbf{z}) plane, where \mathbf{z} points the direction of $\hat{\mathbf{b}}$.

$$1 - \sum_{j} \left(\frac{\omega_{pj}^{2}}{\omega^{2} - \Omega_{j}^{2}} \frac{k_{x}^{2}}{k^{2}} + \frac{\omega_{pj}^{2}}{\omega^{2}} \frac{k_{z}^{2}}{k^{2}} \right) = 0$$

Solution for k	Dispersion relation	Solution	Type
$k_x = 0$	$1 - \sum_{j} \frac{\omega_{pj}^2}{\omega^2} = 0$	$\omega^2 = \sum_{i} \omega_{pj}^2$	Plasma oscillations
$k_z = 0$	$1 - \sum_{j}^{J} \frac{\omega_{pj}^2}{\omega^2 - \Omega_j^2} = 0$	$\omega = \omega_{uh}$ $\omega = \omega_{lh}$	Upper hybrid Lower hybrid
$\begin{array}{ccc} k_x & \neq & 0 \\ k_z & \neq & 0 \end{array}$	$\omega^{2} = \frac{\omega_{uh}^{2}}{2} \pm \frac{\omega_{uh}^{2}}{2} \left(1 - \frac{4\Omega_{e}^{2}\omega_{pe}^{2}\cos^{2}\theta}{\omega_{uh}^{4}}\right)^{1/2}$	$\omega = \omega_{lh}$	Trivelpiece-Gould

Electrostatic wave solutions

8.3 MHD Waves

Using the MHD formulation describing plasmas, one can define a perturbation and analyze what waves propagate in a plasma. The matrix equation is given below, where $v_a = B_0/\sqrt{\mu_0\rho_0}$ and $v_s = \sqrt{\gamma p_0/\rho_0}$. 8:314

$$\begin{pmatrix} \omega^{2} - k_{||}^{2} v_{a}^{2} & 0 & 0 \\ 0 & \omega^{2} - k^{2} v_{a}^{2} - k_{\perp}^{2} v_{s}^{2} & -k_{\perp} k_{||} v_{s}^{2} \\ 0 & -k_{\perp} k_{||} v_{s}^{2} & \omega^{2} - k_{||}^{2} v_{s}^{2} \end{pmatrix} \begin{pmatrix} \xi_{x} \\ \xi_{y} \\ \xi_{z} \end{pmatrix} = 0$$

MHD wave solutions

Solution	Solution $(\beta \ll 1)$	Wave type
$\omega^2 = k_{ }^2 v_a^2$		Shear Alfvén ^{8:314}
$\omega^2 = \frac{k^2}{2} \left(v_a^2 + v_s^2 \right) \left[1 \pm (1 - \alpha)^{1/2} \right]$	$\omega^2 \approx (k_\perp^2 + k_ ^2) v_a^2$	Compressional 8:315
where $\alpha = 4 \frac{k_{ }}{k^2} \frac{v_s^2 v_a^2}{(v_s^2 + v_a^2)^2}$		Alfvén
	$\omega^2 \approx k_{ }^2 v_s^2$	Sound $8:316$

8.4 Hot Plasma

The hot plasma dispersion relations are calculated using the Vlasov equation and including finite Larmor orbit effects. Hot plasma effects are also characterized by electrostatic and electromagnetic waves.

8.4.1 Electrostatic

The dispersion relation (general plasmas)¹⁹

$$\epsilon(\omega, k) = 1 + \sum_{j} \chi_{j}(\omega, k) = 0$$

$$\chi_{j} = \frac{\omega_{pj}^{2}}{k^{2}} \frac{2\pi}{n_{0j}} \int_{-\infty}^{\infty} dv_{||} \int_{0}^{\infty} v_{\perp} dv_{\perp} \sum_{m} \frac{J_{m}^{2}(\frac{k_{\perp}v_{\perp}}{\Omega_{j}}) \left[k_{||} \frac{\partial f_{0j}}{\partial v_{||}} + \frac{m\Omega_{j}}{v_{\perp}} \frac{\partial f_{0j}}{\partial v_{\perp}}\right]}{\omega - m\Omega_{j} - k_{||}v_{||}}$$

where the number subscripts refer to the linearization order.

The dispersion relation (Maxwellian plasmas)

$$\epsilon = 1 + \sum_{j} \frac{1}{k^2 \lambda_{Dj}^2} \left[1 + \zeta_{0j} \sum_{m=-\infty}^{m=\infty} \Gamma_m(b_j) Z(\zeta_{mj}) \right]$$

where

$$Z(\zeta_{mj}) = \frac{1}{\sqrt{\pi}} \int_{-\infty}^{\infty} \frac{dv_{||} e^{v_{||}^2/v_{Thj}^2}}{v_{||} - \left(\frac{\omega - m\Omega_j}{k_{||}}\right)} \qquad b_j = k_{\perp}^2 \rho_{Lj}^2$$
$$\zeta_{mj} = (w - m\Omega_j)/(k_{||} v_{Thj}) \qquad \Gamma_m(b_j) \equiv I_m(b_j) \exp(-b_j)$$

This function can be evaluated as a power or an asymptotic series.

$$|\zeta_m| \ll 1$$
 (kinetic limit)
 $ReZ(\zeta_m) \approx -2\zeta_m \left[1 - \frac{2}{3}\zeta_m^2 + \frac{4}{15}\zeta_m^4 + \dots \right]$ (power series)

$$|\zeta_m| \gg 1$$
 (fluid limit)
$$ReZ(\zeta_m) \approx -\frac{1}{\zeta_m} \left[1 + \frac{1}{2\zeta_m^2} + \frac{3}{4\zeta_m^4} + \dots \right] \text{(asymptotic)}$$

 Γ can be expanded as well as

$$\Gamma_0 \approx 1 - b + \frac{3}{4}b^2 + O(b^3)$$

$$\Gamma_1 \approx \frac{b}{2}(1 - b) + O(b^3)$$

$$\Gamma_2 \approx b^2/8 + O(b^3)$$

$$\Gamma_3 \approx O(b^3)$$

8.4.2 Electromagnetic

The dispersion relation in the electromagnetic limit ¹⁹

$$\begin{pmatrix} K_{xx} - n_z^2 & K_{xy} & K_{xz} + n_x n_z \\ K_{yz} & K_{yy} - n_x^2 - n_z^2 & K_{yz} \\ K_{zx} + n_x n_z & K_{zy} & K_{zz} - n_z^2 \end{pmatrix} \begin{pmatrix} E_x \\ E_y \\ E_z \end{pmatrix} = 0$$

$$K_{xx} = 1 + \sum_{j=i,e} \sum_{l=-\infty}^{\infty} \frac{l^2 \Omega^3}{k_{\perp}^2} \int dv^2 J_l^2(\lambda) P_l$$

$$K_{xy} = -K_{yx} = i \sum_{j} \sum_{l=-\infty}^{\infty} \frac{l \Omega^2}{k_{\perp}} \int dv^2 v_{\perp} J_l(\lambda) J_l'(\lambda) P_l$$

$$K_{xz} = \sum_{j} \sum_{l=-\infty}^{\infty} \frac{l \Omega^2}{k_{\perp}} \int dv^2 v_{||} J_l^2(\lambda) Q_l$$

$$K_{yy} = 1 + \sum_{j} \sum_{l=-\infty}^{\infty} \Omega \int dv^2 \left[v_{\perp} J_l'(\lambda) \right]^2 P_l$$

$$K_{yz} = -i \sum_{j} \sum_{l=-\infty}^{\infty} \Omega \int dv^2 v_{\perp} v_{||} J_l(\lambda) J_l'(\lambda) Q_l$$

$$K_{zx} = \sum_{j} \sum_{l=-\infty}^{\infty} \frac{l \Omega^2}{k_{\perp}} \int dv^2 v_{||} J_l^2(\lambda) P_l$$

$$K_{zy} = i \sum_{j} \sum_{l=-\infty}^{\infty} \Omega \int dv^2 v_{\perp} v_{||} J_l(\lambda) J_l'(\lambda) P_l$$

$$K_{zz} = 1 + \sum_{j} \sum_{l=-\infty}^{\infty} \Omega \int dv^2 v_{\perp}^2 J_l^2(\lambda) Q_l$$

$$\int dv^2 \equiv 2 \int\limits_{-\infty}^{\infty} dv_{||} \int\limits_{0}^{\infty} v_{\perp} dv_{\perp}$$

$$P_{l} = 2\pi \frac{\omega_{pj}^{2}}{\omega \Omega_{j}} \frac{\left[\frac{\partial f_{0j}}{\partial v_{\perp}^{2}} + \frac{k_{||}v_{||}}{\omega} \left(\frac{\partial f_{0j}}{\partial v_{||}^{2}} - \frac{\partial f_{0j}}{\partial v_{\perp}^{2}} \right) \right]}{\omega - l\Omega_{j} - k_{z}v_{||}}$$

$$Q_{l} = 2\pi \frac{\omega_{pj}^{2}}{\omega \Omega_{j}} \frac{\left[\frac{\partial f_{0j}}{\partial v_{||}^{2}} - \frac{l\Omega_{j}}{\omega} \left(\frac{\partial f_{0j}}{\partial v_{||}^{2}} - \frac{\partial f_{0j}}{\partial v_{\perp}^{2}} \right) \right]}{\omega - l\Omega_{j} - k_{z}v_{||}}$$

where
$$\lambda = |k_{\perp}v_{\perp}/\Omega|$$
 and $\partial f/\partial v^2 \equiv \partial f/\partial (v^2)$

Dispersion relation evaluation for an isotropic Maxwellian plasma ^{5:276}

$$K_{xx} = 1 + \sum_{j} \frac{\omega_{pj}^{2}}{\omega^{2}} \frac{e^{-b_{j}}}{b_{j}} \zeta_{0} \sum_{n=-\infty}^{\infty} n^{2} I_{n}(b_{j}) Z(\zeta_{n})$$

$$K_{xy} = -K_{yz} = i \sum_{j} \pm \frac{\omega_{p}^{2}}{\omega^{2}} e^{-b_{j}} \zeta_{0} \sum_{n=-\infty}^{\infty} n \left[I_{n}(b_{j}) - I'_{n}(b_{j}) \right] Z(\zeta_{n})$$

$$K_{xz} = K_{zx} = \sum_{j} \frac{\omega_{pj}^{2}}{\omega^{2}} \frac{e^{-b_{j}}}{(2b_{j})^{1/2}} \zeta_{0} \sum_{n=-\infty}^{\infty} n I_{n}(b_{j}) Z'(\zeta_{n})$$

$$K_{yy} = 1 + \sum_{j} \frac{\omega_{pj}^{2}}{\omega^{2}} \frac{e^{-b_{j}}}{b_{j}} \zeta_{0} \sum_{n=-\infty}^{\infty} \left(n^{2} I_{n}(b_{j}) + 2b_{j}^{2} \left[I_{n}(b_{j}) - I'_{n}(b_{j}) \right] \right) Z(\zeta_{n})$$

$$K_{yz} = -K_{zy} = -i \sum_{j} \pm \frac{\omega_{pj}^{2}}{\omega^{2}} \left(\frac{b_{j}}{2} \right)^{1/2} e^{-b_{j}} \zeta_{0} \sum_{n=-\infty}^{\infty} \left[I_{n}(b_{j}) - I'_{n}(b_{j}) \right] Z'(\zeta_{n})$$

$$K_{zz} = 1 - \sum_{j} \frac{\omega_{pj}^{2}}{\omega^{2}} e^{-b} \zeta_{0} \sum_{n=-\infty}^{\infty} I_{n}(b_{j}) \zeta_{n} Z'(\zeta_{n})$$

Chapter 9

Nuclear Physics

In this chapter, all units are SI with the exception of: temperature and energy, which are defined in the historical units of eV (electron-volts); cross sections, which are defined in the historical units of barn; and Bosch-Hale reaction rates, which are given in cubic centimeters per second.

e is the elementary electric charge Z is the number of nuclear protons N is the number of nuclear neutrons A is the number of nucleons (N+Z) m is the particle mass n is the particle number density \mathbf{v} is the particle velocity vector E is the particle kinetic energy

9.1 Fundamental Definitions

Nuclear reaction notation ^{15:378-381}

$$\begin{array}{ccc} a + X \Rightarrow b + Y \\ & \text{or} & \text{where} \\ X(a,b)Y & \\ \end{array} \left\{ \begin{array}{ll} a = \text{bombarding particle} \\ X = \text{target nucleus} \\ b = \text{ejected particle(s)} \\ Y = \text{product nucleus} \end{array} \right\} \text{exit channel}$$

X(a,b)Ygeneral nuclear reaction X(a,a)Xelastic scattering $X(a,a')X^*$ inelastic scattering X(n,n)Xneutron elastic scattering $X(n,n')X^*$ neutron inelastic scattering X(n,2n)Yneutron multiplication $X(n,\gamma)Y$ neutron capture X(n,f)Yneutron-induced fission

Nuclear mass ^{15:65}

$$m = Zm_p + Nm_n - E_B/c^2$$

Nuclear binding energy $^{15:68}$

$$E_B(A, Z) = a_v A - a_s A^{2/3} - a_c \frac{Z(Z-1)}{A^{1/3}} - a_a \frac{(A-2Z)^2}{A} + \delta(A, Z)$$

where the value of the coefficients a in MeV is $^{15:68}$

$$a_v = 15.5$$
 $a_s = 16.8$ $a_c = 0.72$ $a_a = 23$ $a_p = 34$ MeV

$$\delta(A, Z) = \begin{cases} a_p A^{-3/4} & \text{(Z,N even)} \\ 0 & \text{(A odd)} \\ -a_p A^{-3/4} & \text{(Z,N odd)} \end{cases}$$

Nuclear reaction Q-value ^{15:381}

$$Q = ((m_a + m_X) - (m_b + m_Y))c^2 = E_f - E_i$$

Reaction threshold energy $(Q < 0)^{-15:382}$

$$E_{\text{thresh}} = -\left(\frac{m_Y + m_b}{m_y + m_b - m_a}\right) Q \approx -\left(1 + \frac{m_a}{m_X}\right) Q$$

9.2 Nuclear Interactions

 $A \equiv m_A/m_N$ is approximately the nucleus atomic mass number i and f refer to initial and final, respectively θ is the angle between the a and b trajectory in the lab frame $\theta_{\rm cm}$ is the angle between the a and b trajectory in the center of mass frame

Reaction Q-value from kinematics ^{15:384}

$$Q = E_b \left(1 + \frac{m_b}{m_Y} \right) - E_a \left(1 - \frac{m_a}{m_Y} \right) - 2 \left(\frac{m_a m_b}{m_V^2} E_a E_b \right)^{1/2} \cos \theta$$

Ejected particle energy: X(a,b)Y ^{15:382}

$$E_y^{1/2} = \zeta \frac{(m_a m_b E_a)^{1/2}}{m_Y + m_b} \pm \frac{(m_a m_b E_a \zeta^2 + (m_Y + m_b)[m_Y Q + (m_Y - m_a) E_a])^{1/2}}{m_Y + m_b}$$

Maximum kinetic energy transfer fraction: $X(a,a)X^{-3}$

$$\frac{E_f}{E_i}\bigg|_{\theta=0} = \frac{4A_1A_2}{(A_1 + A_2)^2}$$

9.2.1 Charged Particle Interactions

Stopping power of heavy charged particles (Bethe formula) ^{15:194}

$$\frac{dE}{dx} = \left(\frac{e^2}{4\pi\epsilon_0}\right)^2 \frac{4\pi z^2 N_A Z \rho}{m_e c^2 \beta^2 A} \left[\ln\left(\frac{2m_e c^2 \beta^2}{I}\right) - \ln\left(1 - \beta^2\right) - \beta^2 \right]$$

where $\beta c = v$ and ze are the incident particle's speed and charge; ρ is the mass density of the stopping medium;

 N_A is Avogadro's number;

I is mean excitation of atomic electrons, typically taken as $I \approx 10Z$.

Collisional stopping power of electrons ^{15: 196}

$$\left(\frac{dE}{dx}\right)_{c} = \left(\frac{e^{2}}{4\pi\epsilon_{0}}\right)^{2} \frac{2\pi N_{A}Z\rho}{m_{e}c^{2}\beta^{2}A} \left[\ln\frac{E_{i}(E_{i} + m_{e}c^{2})^{2}\beta^{2}}{2I^{2}m_{e}c^{2}} + (1 - \beta^{2}) - \left(2\sqrt{1 - \beta^{2}} - 1 + \beta^{2}\right)\ln 2 + \frac{1}{8}\left(1 - \sqrt{1 - \beta^{2}}\right)^{2}\right]$$

Radiative stopping power of electrons ($\gtrsim 1~{\rm MeV})^{-15:\,196}$

$$\left(\frac{dE}{dx}\right)_{r} = \left(\frac{e^{2}}{4\pi\epsilon_{0}}\right)^{2} \frac{Z^{2}N_{A}\left(E_{i} + m_{e}c^{2}\right)\rho}{137m_{e}^{2}c^{4}A} \left[4\ln\frac{2\left(E_{i} + m_{e}c^{2}\right)}{m_{e}c^{2}} - \frac{4}{3}\right]$$

9.2.2 Neutron Interactions

Ejected neutron energy: $X(n,n)X^{15:448}$

$$E_{n,f} = \frac{A^2 + 2A\cos\theta_{\rm cm} + 1}{(A+1)^2}$$

Maximum kinetic energy transfer fraction: $X(n,n)X^{-15:448}$

$$\left. \frac{E_{n,f}}{E_{n,i}} \right|_{\theta=0} = \left(\frac{A-1}{A+1} \right)^2$$

Neutron lethargy ($E_n \lesssim 10 \text{ MeV}$) ^{15:450}

$$\xi = 1 + \frac{(A-1)^2}{2A} \ln \left(\frac{A-1}{A+1} \right)$$

Number of collisions required to change neutron energies ^{15:450}

$$N = \frac{\ln(E_i/E_f)}{\xi}$$

9.2.3 Gamma Interactions

Klein-Nishina cross section for Compton scattering ^{15:201}

$$\frac{d\sigma}{d\Omega} = r_0^2 \left[\frac{1}{1 + \alpha \left(1 - \cos \theta \right)} \right]^3 \left[\frac{1 + \cos^2 \theta}{2} \right] \left[1 + \frac{\alpha^2 \left(1 - \cos \theta \right)}{\left(1 + \cos^2 \theta \right) \left[1 + \alpha \left(1 - \cos \theta \right) \right]} \right]$$

where $(\alpha = E_{\gamma}/mc^2)$ and $(r_0 = e^2/4\pi\epsilon_0 mc^2 = 2.818 \text{ fm})$ is the classical electron radius.

Energy shift from Compton scattering ^{15:201}

$$E_f = \frac{E_i}{1 + \left(\frac{E_i}{mc^2}\right)(1 - \cos\theta)}$$

9.3 Cross Section Theory

A reaction cross section $\sigma(E_a)$, or more simply σ , is a measure of the probability that reaction X(a,b)Y will occur. Consider a beam of a particle with current I_a directed onto X target nuclei with an areal density of N_X per unit area. By observing the energy and angular distribution, $e(E_b)$ and $r(\theta,\phi)$ respectively, of the ejected particle b into a solid angle $d\Omega$ then the doubly differential cross section can be determined, which is the probability of observing particle b at in solid angle $d\Omega$ with energy E_b . 15: 392–394

Doubly differential cross section ^{15:392-393}

$$\frac{d\sigma}{d\Omega \, dE_b} = \frac{r(\theta, \phi) \, e(E_b)}{4\pi I_a N_X}$$

Differential energy cross section ^{15:393}

$$\frac{d\sigma}{dE_b} = \int \frac{d\sigma}{d\Omega \, dE_b} d\Omega$$

Differential angular cross section ^{15:393}

$$\frac{d\sigma}{d\Omega} = \int \frac{d\sigma}{d\Omega \, dE_b} \, dE_b$$

Reaction cross section ^{15:393}

$$\sigma = \int \frac{d\sigma}{d\Omega} d\Omega = \int_{0}^{2\pi} \int_{0}^{\pi} \frac{d\sigma}{d\Omega} \sin\theta \, d\theta \, d\phi$$

Total cross section ^{15:393}

$$\sigma_T = \sum_{i=0}^{\text{all reactions}} \sigma_i$$

The Sommerfeld parameter ^{23:5}

$$\eta = \frac{Z_a Z_X e^2}{\hbar v}$$

Astrophysical S-factor ^{23:5}

$$S(E) = \sigma(E)E \exp(2\pi\eta)$$

9.4 Reaction Rate Theory

For a thermonuclear plasma, the volumetric reaction rate \mathcal{R} (also known as thermal reactivity) describes the number of reactions occurring per unit volume per unit time. In thermonuclear fusion plasmas, \mathcal{R} is obtained by integrating the energy-dependent cross section, $\sigma(v)$, over the distribution functions of the participating species. 26:5-8

Partial volumetric reaction rate ^{26:5-6}

$$\mathcal{R}_p = \sigma(v)vf_1(\mathbf{v}_1)f_2(\mathbf{v}_2) \quad \mathbf{v} = \mathbf{v}_1 - \mathbf{v}_2$$

Total volumetric reaction rate for general f(v) ^{26:6}

$$\mathcal{R} = \frac{1}{1 + \delta_{12}} \iint \sigma(v) v f_1(\mathbf{v}_1) f_2(\mathbf{v}_2) d^3 v_1 d^3 v_2$$

where δ_{12} is the Kronecker delta for particle species 1 and 2 that prevents double counting for like-species plasmas.

Total volumetric reaction rate for Maxwellian f(v)) 2:624 26:6

$$\mathcal{R} = \frac{n_1 n_2}{1 + \delta_{12}} \langle \sigma v \rangle \text{ where } \begin{cases} \langle \sigma v \rangle = \left(\frac{8\mu^3}{\pi T^3}\right)^{1/2} \frac{1}{m_1^2} \int \sigma(E) E e^{-\mu E/m_1 T} dE \,_{[\text{m}^3 \text{s}^{-1}]} \\ \mu = \frac{m_1 m_2}{m_1 + m_2} \qquad E = \frac{1}{2} m v^2 \end{cases}$$

9.5 Nuclear Reactions for Fusion Plasmas

All data from the ENDF/B-VII nuclear data libraries.⁴

	Abbreviations: n=neutron, p= 1 H, d= 2 H, t= 3 H, h= 3 He, $\alpha = ^{4}$ He					
	Reactants		Products	Branching	Q-value	
			(kinetic energy in MeV)	ratio	(MeV)	
1.	d + t	\longrightarrow	$\alpha(3.52) + n(14.07)$	1.00	17.59	
2.	d + d	\longrightarrow	t(1.01) + p(3.02)	0.50	4.03	
		\longrightarrow	h(0.82) + n(2.45)	0.50	3.27	
3.	d + h	\longrightarrow	$\alpha(3.67) + p(14.68)$	1.00	18.35	
4.	t + t	\longrightarrow	$\alpha + 2n$	1.00	11.33	
5.	h + t	\longrightarrow	$\alpha + p + n$	0.51	12.10	
		\longrightarrow	$\alpha(4.77) + d(9.54)$	0.43	14.32	
		\longrightarrow	5 He(1.87) + p(9.34)	0.06	11.21	
6.	$p + {}^6Li$	\longrightarrow	$\alpha(1.72) + h(2.30)$	1.00	4.02	
7.	$p + {}^{7}Li$	\longrightarrow	2α	0.20	17.35	
		\longrightarrow	$^{7}\mathrm{Be}+\mathrm{n}$	0.80	-1.64	
8.	$d + {}^6Li$	\longrightarrow	2α	1.00	22.37	
9.	$p + {}^{11}B$	\longrightarrow	3 α	1.00	8.62	

9.6 Nuclear Reactions for Fusion Energy

All data from the ENDF/B-VII nuclear data libraries.⁴

Abbreviations: n=neutron, t=3H, B=tritium breeding, M=neutron multiplication $\sigma(0.025 \text{ eV})$ $\sigma(14.1 \text{ MeV})$ Reaction Q-value Purpose [MeV][barn] [barn] $^6\mathrm{Li}(\mathrm{n,t})^4\mathrm{He}$ 1. 4.78 В 0.03978 2. $^6\mathrm{Li}(\mathrm{n},2\mathrm{n}\alpha)^6\mathrm{Li}$ -3.96M0.08 7 Li $(n,2n)^6$ Li 3. -7.25Μ 0.03 $^7\mathrm{Li}(\mathrm{n},2\mathrm{n}\alpha)^3\mathrm{H}$ 4. -8.72B/M0.02 $^9\mathrm{Be}(\mathrm{n},2\mathrm{n})^8\mathrm{Be}$ 5. -1.57M0.48 204 Pb $(n,2n)^{203}$ Pb 6. -8.39 2.22Μ 206 Pb $(n,2n)^{205}$ Pb 7. -8.09 2.22Μ 207 Pb $(n,2n)^{206}$ Pb 8. -6.74Μ 2.29 $^{208}Pb(n,2n)^{207}Pb$ 9. -7.37M2.30

9.7 Fusion Cross Section Parametrization

The Bosch-Hale parametrization of the fusion reaction cross section 2

$$\sigma(E_{\rm keV}) = \frac{S(E)}{E \exp(B_G/\sqrt{E})} \quad \text{[millibarn]}$$

where

$$S(E_{\text{keV}}) = \frac{A_1 + E(A_2 + E(A_3 + E(A_4 + EA_5)))}{1 + E(B_1 + E(B_2 + E(B_3 + EB_4)))}$$

Bosch-Hale parametrization coefficients for several fusion reactions²

	$^2\mathrm{H}(\mathrm{d,n})^3\mathrm{He}$	$^2\mathrm{H}(\mathrm{d,p})^3\mathrm{H}$	$^3H(\mathrm{d,n})^4\mathrm{He}$	$^3{\rm He}({\rm d,p})^4{\rm He}$
$B_G [keV]$	31.3970	31.3970	34.3827	68.7508
$egin{array}{c} A_1 \\ A_2 \\ A_3 \\ A_4 \\ A_5 \end{array}$	$5.3701\times10^4\\3.3027\times10^2\\-1.2706\times10^{-1}\\2.9327\times10^{-5}\\-2.5151\times10^{-9}$	5.5576×10^{4} 2.1054×10^{2} -3.2638×10^{-2} 1.4987×10^{-6} 1.8181×10^{-10}	6.927×10^4 7.454×10^8 2.050×10^6 5.200×10^4 0.0	5.7501×10^{6} 2.5226×10^{3} 4.5566×10^{1} 0.0 0.0
$B_1 \\ B_2 \\ B_3 \\ B_4$	0.0 0.0 0.0 0.0	0.0 0.0 0.0 0.0	6.380×10^{1} -9.950×10^{-1} 6.981×10^{-5} 1.728×10^{-4}	-3.1995×10^{-3} -8.5530×10^{-6} 5.9014×10^{-8} 0.0
Valid Range [keV]	0.5 <e<4900< td=""><td>0.5<e<5000< td=""><td>0.5<e<550< td=""><td>0.3<e<900< td=""></e<900<></td></e<550<></td></e<5000<></td></e<4900<>	0.5 <e<5000< td=""><td>0.5<e<550< td=""><td>0.3<e<900< td=""></e<900<></td></e<550<></td></e<5000<>	0.5 <e<550< td=""><td>0.3<e<900< td=""></e<900<></td></e<550<>	0.3 <e<900< td=""></e<900<>

Tabulated Bosch-Hale cross sections [millibarns] 2

E (keV)	$^2\mathrm{H}(\mathrm{d,n})^3\mathrm{He}$	$^2\mathrm{H}(\mathrm{d,p})^3\mathrm{H}$	$^3H(\mathrm{d,n})^4\mathrm{He}$	$^3\mathrm{He}(\mathrm{d,p})^4\mathrm{He}$
3 4 5 6 7 8 9	2.445×10^{-4} 2.093×10^{-3} 8.834×10^{-3} 2.517×10^{-2} 5.616×10^{-2} 1.064×10^{-1} 1.794×10^{-1} 2.779×10^{-1}	$2.513\times10^{-4} \\ 2.146\times10^{-3} \\ 9.038\times10^{-3} \\ 2.569\times10^{-2} \\ 5.720\times10^{-2} \\ 1.081\times10^{-1} \\ 1.820\times10^{-1} \\ 2.812\times10^{-1}$	$\begin{array}{c} 9.808 \times 10^{-3} \\ 1.073 \times 10^{-1} \\ 5.383 \times 10^{-1} \\ 1.749 \times 10^{0} \\ 4.335 \times 10^{0} \\ 8.968 \times 10^{0} \\ 1.632 \times 10^{1} \\ 2.702 \times 10^{1} \end{array}$	$\begin{array}{c} 1.119 \times 10^{-11} \\ 1.718 \times 10^{-9} \\ 5.199 \times 10^{-8} \\ 6.336 \times 10^{-7} \\ 4.373 \times 10^{-6} \\ 2.058 \times 10^{-5} \\ 7.374 \times 10^{-5} \\ 2.160 \times 10^{-4} \end{array}$
12 15 20	5.563×10^{-1} 1.178×10^{0} 2.691×10^{0}	5.607×10^{-1} 1.180×10^{0} 2.670×10^{0}	6.065×10^{2} 1.479×10^{2} 4.077×10^{2}	1.206×10^{-3} 7.944×10^{-3} 6.568×10^{-2}

9.8 Fusion Reaction Rate Parametrization

The Bosch-Hale parametrization of the volumetric reaction rates 2

$$\langle \sigma v \rangle = C_1 \cdot \theta \cdot \sqrt{\frac{\xi}{m_{\mu} c^2 T_{\rm i, keV}^3}} e^{-3\xi}$$
 [cm³ s⁻¹]
$$or \times 10^{-6} \text{ [m}^3 \text{ s}^{-1}]$$

where

$$\theta = T / \left(1 - \frac{T(C_2 + T(C_4 + TC_6))}{1 + T(C_3 + T(C_5 + TC_7))} \right) \qquad \xi = \left(\frac{B_G^2}{4\theta} \right)^{1/3}$$

Bosch-Hale parametrization coefficients for volumetric reaction rates ²

	$^2\mathrm{H}(\mathrm{d,n})^3\mathrm{He}$	$^{2}\mathrm{H}(\mathrm{d,p})^{3}\mathrm{H}$	$^3H(\mathrm{d,n})^4\mathrm{He}$	$^{3}\mathrm{He}(\mathrm{d,p})^{4}\mathrm{He}$
$\begin{array}{c} {\rm B}_G \; [{\rm keV^{1/2}}] \\ m_\mu c^2 \; [{\rm keV}] \end{array}$	31.3970 937 814	31.3970 937 814	34.3827 1 124 656	68.7508 1 124 572
$egin{array}{c} C_1 \\ C_2 \\ C_3 \\ C_4 \\ C_5 \\ C_6 \\ C_7 \\ \end{array}$	$5.43360\times10^{-12} \\ 5.85778\times10^{-3} \\ 7.68222\times10^{-3} \\ 0.0 \\ -2.96400\times10^{-6} \\ 0.0 \\ 0.0$	5.65718×10^{-12} 3.41267×10^{-3} 1.99167×10^{-3} 0.0 1.05060×10^{-5} 0.0 0.0	1.17302×10^{-9} 1.51361×10^{-2} 7.51886×10^{-2} 4.60643×10^{-3} 1.35000×10^{-2} -1.06750×10^{-4} 1.36600×10^{-5}	5.51036×10^{-10} 6.41918×10^{-3} -2.02896×10^{-3} -1.91080×10^{-5} 1.35776×10^{-4} 0.0 0.0
Valid range (keV)	$0.2 < T_i < 100$	$0.2 < T_i < 100$	$0.2 < T_i < 100$	$0.5 < T_i < 190$


Tabulated Bosch-Hale reaction rates $[m^3 s^{-1}]^2$


	Tabalaica Doi	scii iiaic icaculo	ii iaccs [iii s]
T (keV)	$^2\mathrm{H}(\mathrm{d,n})^3\mathrm{He}$	$^2\mathrm{H}(\mathrm{d,p})^3\mathrm{H}$	$^3H(\mathrm{d,n})^4\mathrm{He}$	$^3{\rm He}({\rm d,p})^4{\rm He}$
1.0 1.5 2.0 3.0 4.0 5.0 8.0 10.0 12.0 15.0 20.0	$\begin{array}{c} 9.933\times10^{-29}\\ 8.284\times10^{-28}\\ 3.110\times10^{-27}\\ 1.602\times10^{-26}\\ 4.447\times10^{-26}\\ 9.128\times10^{-26}\\ 3.457\times10^{-25}\\ 6.023\times10^{-25}\\ 9.175\times10^{-25}\\ 1.481\times10^{-24}\\ 2.603\times10^{-24} \end{array}$	$\begin{array}{c} 1.017\times10^{-28}\\ 8.431\times10^{-28}\\ 3.150\times10^{-27}\\ 1.608\times10^{-26}\\ 4.428\times10^{-26}\\ 9.024\times10^{-26}\\ 3.354\times10^{-25}\\ 5.781\times10^{-25}\\ 8.723\times10^{-25}\\ 1.390\times10^{-24}\\ 2.399\times10^{-24} \end{array}$	6.857×10^{-27} 6.923×10^{-26} 2.977×10^{-25} 1.867×10^{-24} 5.974×10^{-24} 1.366×10^{-23} 6.222×10^{-23} 1.136×10^{-22} 1.747×10^{-22} 2.740×10^{-22} 4.330×10^{-22}	3.057×10^{-32} 1.317×10^{-30} 1.399×10^{-29} 2.676×10^{-28} 1.710×10^{-27} 6.377×10^{-27} 7.504×10^{-26} 2.126×10^{-25} 4.715×10^{-24} 3.482×10^{-24}

Approximate DT volumetric reaction rate (10 $\lesssim~T~[\mathrm{keV}] \lesssim 20)^{-26:\,7}$

$$\langle \sigma v \rangle_{\rm DT} = 1.1 \times 10^{-24} T_{\rm keV}^2 \quad [{\rm m}^3 \ {\rm s}^{-1}]$$

9.9 Cross Section and Reaction Rate Plots

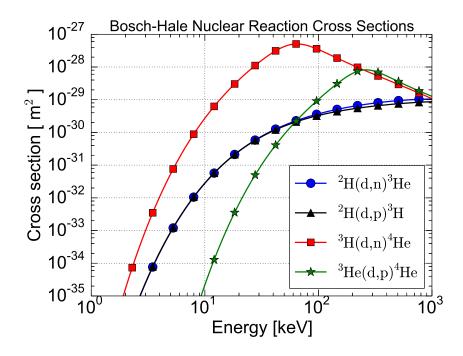

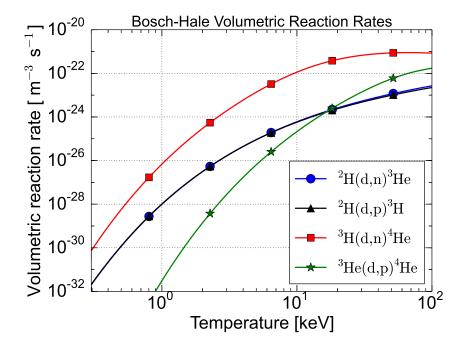

Chapter 10

Tokamak Physics

In this chapter, all units are SI with the exception of temperature, which is defined in the historical units of eV (electron-volts).

e is the fundamental charge unit

Z is the number of nuclear protons

 R_0 is the major radius of a toroidal plasma

a and b are the horizontal and vertical minor radii of a toroidal plasma

Note: a=b for circular cross sections, and a is used by convention R and r denote lengths in the major and minor radii, respectively θ and ϕ are the poloidal and toroidal angular coordinates, respectively B_x is the magnetic field in direction x

 B_{xa} is the magnetic field evaluated at the plasma edge in direction x I_p is the toroidal plasma current

p is the plasma pressure

v is velocity of the plasma

10.1 Fundamental Definitions

Inverse aspect ratio ^{26:117}

$$\epsilon = \frac{a}{R_0}$$

Plasma elongation ^{26:741}

$$\kappa = \frac{b}{a}$$

Plasma triangularity ^{26:741}

$$\delta = \frac{(c+d)/2}{a}$$

where c, d are distances to the top of the plasma and the x-point, respectively, from the plasma center.

Large aspect ratio expansion ($\epsilon \ll 1$) ^{8: 280}

$$\frac{1}{R} \approx \frac{1}{R_0} \left(1 - \frac{r}{R_0} \cos \theta \right)$$

Surface area of a torus

$$S_{\text{c-torus}} = 4\pi^2 a R_0$$
 (Circular cross section) ^{14:24}
$$S_{\text{e-torus}} = 8\pi a R_0 E(k) \approx 4\pi^2 a R_0 \left(\frac{1+\kappa^2}{2}\right)^{1/2}$$
 (Elliptical cross section) ²⁷

Volume of a torus

$$V_{\text{c-torus}} = 2\pi^2 a^2 R_0$$
 (Circular cross section) ^{14:24} $V_{\text{e-torus}} = 2\pi^2 a^2 \kappa R_0$ (Elliptical cross section) ²⁷

MHD toroidal plasma volume 7:112

$$V(\psi) = \int_{0}^{2\pi} \int_{0}^{2\pi} \int_{0}^{\hat{r}} Rr dr d\theta d\phi$$
$$= \pi R_0 \int_{0}^{2\pi} d\theta \hat{r}^2 \left[1 + \frac{2}{3} \left(\frac{\hat{r}}{R_0} \right) \cos \theta \right] \qquad \text{(low aspect ratio)}$$

Volume averaged plasma pressure 3

$$\langle p \rangle = \frac{1}{V} \int_{volume} p \, d\tau$$

Toroidal plasma beta ^{7:71}

$$\beta_t = \frac{2\mu_0 \langle p \rangle}{B_{\phi a}^2}$$

Poloidal plasma beta ^{7:71}

$$\beta_p = \frac{2\mu_0 \langle p \rangle}{B_{\theta a}^2} = \frac{8\pi^2 a^2 \kappa^2 \langle p \rangle}{\mu_0 I_p^2}$$

Radial electric field in a rotating toroidal plasma ³

$$E_r \approx v_\phi B_\theta - v_\theta B_\phi + \frac{1}{Z_i en} \nabla p$$

10.2 Magnetic Topology

Toroidal magnetic field for plasma confinement ³

$$B_{\phi} \approx \frac{B_{\phi}(r)R_0}{R}$$

$$\approx \frac{B_{\phi}(r)}{1 - \epsilon \cos \theta} \text{ (valid for } \epsilon \ll 1\text{)}$$

Poloidal magnetic field for plasma confinement ³

$$B_{\theta} \approx \frac{\mu_0 I_p(r)}{2\pi r}$$

Safety factor (general) ^{26:111}

$$q(r) = \frac{\text{\# of toroidal field line orbits at r}}{\text{\# of poloidal field line orbits at r}}$$

Safety factor for cylindrical plasma (r, θ, z) ^{26:112}

$$q(r)_{\text{cyl}} = \frac{rB_{\phi}(r)}{RB_{\theta}(r)} = \frac{2\pi r^2 B_{\phi}(r)}{\mu_0 I_p(r)R}$$

Safety factor for toroidal plasma $(R, \theta, \phi)^{-8:288}$

$$q(r^*)_{\text{tor}} = \frac{1}{2\pi} \int_0^{2\pi} \frac{rB_{\phi}}{RB_{\theta}} d\theta$$
$$= \frac{r_0 B_{\phi}(r_0)}{R_0 B_{\theta}(r_0) \left(1 - r_0^2 / R_0^2\right)^{1/2}}$$

where the flux surfaces $r^* = r_0$ are circles.

Safety factor at the edge for toroidal plasma (R, θ, ϕ) 8:387

$$q_* \equiv \frac{2\pi a^2 B_0}{\mu_0 R_0 I_p} = \frac{\pi k}{4E(k)(\beta/\epsilon)^{1/2}}$$

where $E(k) \approx \left[k^2 + \pi^2/4(1-k^2)\right]$ is the complete elliptic integral of the second kind and the definition of k is given by

$$\frac{B_i^2}{B_0^2} \equiv 1 - \frac{2\mu_0 p}{B_0^2} + \frac{4\epsilon\mu_0 p}{k^2 B_0^2} \left(2 - k^2\right)$$

Approximate edge safety factor for a large aspect ratio toroidal plasma $^{8:\,414}$

$$q_* \approx \frac{2\pi B_0 a^2}{\mu_0 R_0 I_p} \left(\frac{1+\kappa^2}{2}\right)$$

Magnetic shear 8:408

$$s = \frac{r}{q} \frac{dq}{dr}$$

10.3 Magnetic Inductance

Definition of magnetic inductance 8:281

$$\frac{1}{2}LI^2 \equiv \int \frac{B^2}{2\mu_0} d\tau$$

Normalized inductance per unit length [dimensionless] 8:281

$$\ell \equiv \frac{L/2\pi R_0}{\mu_0/4\pi} = \frac{2L}{\mu_0 R_0}$$

Internal inductance of a toroidal plasma 8:281

$$\begin{split} L_i &= \frac{8\pi R_0}{I_p^2} \int\limits_0^a \frac{B_\theta^2}{2\mu_0} \, r dr = \frac{\mu_0 R_0 \langle B_\theta^2 \rangle}{2B_{\theta a}^2} \\ \ell_i &= \frac{\langle B_\theta^2 \rangle}{B_\theta^2(a)} \end{split}$$

External inductance of a toroidal plasma 8:281

$$L_e = \frac{8\pi R_0}{I_p^2} \int_a^\infty \frac{B_\theta^2}{2\mu_0} r dr = \mu_0 R_0 \left(\ln \frac{8R_0}{a} - 2 \right)$$

$$\ell_e = 2 \ln \frac{8R_0}{a} - 4$$

10.4 Toroidal Force Balance

Equation of toroidal force balance 8:279

$$\int \hat{\mathbf{R}} \cdot (\mathbf{J} \times \mathbf{B} - \nabla p) \ d\tau = 0$$

where

$$\mu_0 \mathbf{J} = \nabla \times \mathbf{B} = \frac{R_0}{R} \frac{\partial B_{\phi}}{\partial r} \hat{\boldsymbol{\theta}} - \frac{1}{r} \frac{\partial}{\partial r} \left(\frac{R_0}{R} r B_{\theta} \right) \hat{\boldsymbol{\phi}}$$

$$\begin{split} \hat{\mathbf{R}} \cdot \mathbf{J} \times \mathbf{B} &= \\ &- \cos \theta \left[\frac{R_0^2}{R^2} \frac{\partial}{\partial r} \left(\frac{B_\phi^2}{2\mu_0} \right) + \frac{R_0 B_\theta}{\mu_0 r R} \frac{\partial}{\partial r} \left(\frac{R_0}{R} r B_\theta \right) \right] - \frac{B_{\text{vert}}}{\mu_0 r} \frac{\partial}{\partial r} \left(\frac{R_0}{R} r B_\theta \right) \end{split}$$

The hoop force 8:280

$$\mathbf{F}_{\text{hoop}} = \frac{I_p^2}{2} \frac{\partial}{\partial R} (L_i + L_e) \,\,\hat{\mathbf{R}} = 2\pi^2 a^2 (\ell_i + \ell_e + 2) \frac{B_{\theta a}^2}{2\mu_0} \,\hat{\mathbf{R}}$$
$$= \frac{\mu_0 I_p^2}{2} \left(\ln \frac{8R}{a} - 1 + \frac{\ell_i}{2} \right) \,\hat{\mathbf{R}}$$

The tire tube force 8:280

$$\mathbf{F}_{\text{tire}} = 2\pi^2 a^2 \langle p \rangle \,\hat{\mathbf{R}}$$
$$= \frac{\mu_0 I_p^2 \beta_p}{4} \,\hat{\mathbf{R}}$$

The 1/R force $^{8:280}$

$$\begin{aligned} \mathbf{F}_{1/\mathrm{R}} &= 2\pi^2 a^2 \left(\frac{B_{\phi a}^2}{2\mu_0} - \frac{\langle B_{\phi}^2 \rangle}{2\mu_0} \right) \, \hat{\mathbf{R}} \\ &= \frac{\mu_0 I_p^2}{4} \left(\beta_p - 1 \right) \, \hat{\mathbf{R}} \end{aligned}$$

where
$$\langle p \rangle = \frac{1}{2\mu_0} \left(B_{\phi a}^2 - \langle B_{\phi}^2 \rangle + B_{\theta a}^2 \right)$$
 have been used.

The vertical field force on toroidal plasma ring $\,^{8:\,282}$

$$\mathbf{F}_{\text{vert}} = -2\pi R_0 B_{\text{vert}} I_p \,\hat{\mathbf{R}}$$

The vertical magnetic field required to balance toroidal forces 8:282

$$B_{\text{vert}} = \frac{\mathbf{F}_{\text{hoop}} + \mathbf{F}_{\text{tire}} + \mathbf{F}_{1/R}}{2\pi R_0 I_p}$$

$$= \frac{\epsilon}{4} B_{\theta a} \left(\ell_e + \ell_i + 2 + \frac{2\mu_0 \langle p \rangle}{B_{\phi a}^2} + \frac{B_{\phi a}^2 - \langle B_{\phi}^2 \rangle}{B_{\theta a}^2} \right)$$

$$= \frac{\mu_0 I_p}{4\pi R_0} \left(\ln \frac{8R}{a} - \frac{3}{2} + \frac{\ell_i}{2} + \beta_p \right)$$

Shafranov shift of the plasma center 7:2129

$$\Delta = \frac{b^2}{2R_0} \left[\left(\beta_p + \frac{l_i - 1}{2} \right) \left(1 - \frac{a^2}{b^2} \right) + \ln \frac{b}{a} \right] - \frac{B_{vert}}{B_{\theta 1}(b)}$$

10.5 Plasma Para- and Dia-Magnetism

Global pressure balance equation in a screw pinch $^{8:270}$

$$\langle p \rangle = \frac{1}{2\mu_0} \left(B_{za}^2 - \langle B_z^2 \rangle + B_{\theta a}^2 \right)$$

can be rearranged to give

$$\beta_p = \frac{B_{za}^2 - \langle B_z^2 \rangle}{B_{\theta a}^2} + 1$$

Diamagnetic : $\beta_p < 1$ Paramagnetic : $\beta_p > 1$

10.6 MHD Stability Limits

Using experimental data from a wide variety of tokamaks, empirical scalings for critical tokamak instabilities have been constructed. Units: current in MA, length in m, magnetic field in T, and density in $n_{20} = n/10^{20}$.

(a) Beta limits (no plasma shaping)

$$\beta_t \le \beta_L \frac{I}{aB_\phi}$$

 $\beta_L = 0.028$ Troyon kink limit - no wall²⁴

 $\beta_L = 0.044$ Sykes ballooning limit - no wall

 $\beta_L = 0.06$ kink - ideal conducting wall

(b) Definition of β_N ^{26:347}

$$\beta_N \equiv \beta_t [\%] \frac{aB_\phi}{I_p[\text{MA}]}$$

(c) The Greenwald (or Density) Limit ^{26:377}

$$n_{20} \le n_G = \frac{I_p[\text{MA}]}{\pi a^2}$$

10.7 Tokamak Heating and Current Drive

(a) Ohmic plasma heating

The neo-classical resistivity approximation is ^{8:538}

$$\eta_{||} = \frac{1}{\left[1 - (r/R_0)^{1/2}\right]^2} \eta_{||}^{\text{Spitzer}}$$

Plugging in for the current as $J_{||} = E_0/\eta_{||}^{-8:539}$

$$P_{\Omega} = \left(\frac{5.6 \times 10^{-2}}{1 - 1.31\epsilon^{1/2} + 0.46\epsilon}\right) \left(\frac{R_0 \left(I[\text{MA}]\right)^2}{a^2 \kappa T_{keV}^{3/2}}\right) [\text{MW}]$$

(b) Neutral beam plasma heating ^{26: 246-248}

$$P = m_b \frac{ne^4 \ln \Lambda}{2\pi \epsilon_0^2 m_b^2} \left(\frac{2m_e^{1/2} E_b}{3(2\pi)^{1/2} T_e^{3/2}} + \frac{m_b^{3/2}}{2^{3/2} m_i E_b^{1/2}} \right)$$

where E_b is the energy of the beam.

The critical beam energy when the ions and the electrons are heated equally by the beam is

$$E_c = 14.8 \frac{A_b}{A_i^{2/3}} T_e$$

10.7.1 Current Drive

(a) Inductive current

This current is driven via the central solenoid. The current distribution is calculated through the use of Faraday's law and $J_{||} = E_0/\eta_{||}$. Total current normally has to be measured in order to normalize the distribution of current density.

(b) Bootstrap current

Bootstrap current is the self-generated current drive in the plasma from trapped and passing electrons in the plasma.

The exact form of the bootstrap current density is given by 8:496

$$j_B = -4.71q \left(\frac{R_0}{r}\right)^{1/2} \frac{T}{B_0} \left[\frac{\partial n}{\partial r} + 0.04 \frac{n}{T} \frac{\partial T}{\partial r}\right]$$

The total bootstrap fraction is given by ^{8:496}

$$f_B \approx -1.18 \frac{\partial}{\partial r} (\ln n + 0.04 \ln T) / \frac{\partial}{\partial r} (\ln r B_\theta) \left(\frac{r}{R_0}\right)^{1/2} \beta_p \sim \epsilon^{1/2} \beta_p$$

(c) Neutral beam current drive

By positioning a neutral beam in the tangential direction, it is possible to drive both rotation and current. Neutral beam current drive efficiency scales as (at $E_b = 40A_bT_e$)⁶

$$I[A]/P[W] \approx \frac{0.06T_e}{n_{20}RZ_b} (1 - Z_b/Z_{\text{eff}})$$

(d) Lower hybrid current drive

Currently one of the most used current drive mechanisms is the lower hybrid system. It launches a wave that Landau damps on the fast electron population and preferentially drives electrons in one direction. 8:623

$$I[A]/P[W] = 1.17/\left(n_{||}^2 R_0 n_{20}\right)$$

There exists an accessibility condition for the waves which forces an increase in the launched $n_{||}$ $^{22:\,100}$

$$n_{||}^2 > \left(S^{1/2} + \left|\frac{D^2}{P}\right|^{1/2}\right)^2$$

where S, P, and D are defined in Chapter 8.

Because LHCD relies on Landau damping, there is an additional constraint on the $n_{||}$: Landau damping dominates at $n_{||}^c \gtrsim 7.0/T_{\rm keV}^{1/2~9}$

(e) Fast Magnetosonic wave current drive

Allows peaked on-axis profiles and has the following current drive efficiency⁶

$$I[A]/P[W] = 0.025 \frac{T_{\text{keV}}}{n_{20}R_0}$$

10.8 Empirical Scaling Laws

10.8.1 Energy Confinement Time Scalings

Goldston auxiliary heated tokamak scaling (l refers to the plasma size $\sim a$) ^{26:152}

$$\tau_E \sim B_p^2 l^{1.8}/nT$$

The ITER-89 L-Mode (ITER89-P) ^{26:740}

$$\tau_E = 0.048 I_M^{0.85} R_0^{1.2} a^{0.3} \kappa^{0.5} \bar{n}_{20}^{0.1} B_0^{0.2} A^{0.5} P_M^{-0.5}$$
 [s]

The ITER-98 L-Mode ¹⁷

$$\tau_E = 0.023 I_M^{0.96} B_T^{0.03} n_{19}^{0.40} M^{0.20} R^{1.83} \epsilon^{-0.06} \kappa^{0.64} P_{MW}^{-0.73} \hspace{0.5cm} [\mathrm{s}]$$

The ITER-98 (IPB98[y,2]); ELMy H-mode 17

$$\tau_E = 0.0562 I_M^{0.93} B_T^{0.15} n_{19}^{0.41} M^{0.19} R^{1.97} \epsilon^{0.58} \kappa^{0.78} P_{MW}^{-0.69}$$
 [s]

Scaling for linear regime energy transport ¹⁷

$$\tau_E = 0.07 n_{20} q \kappa^{0.5} a R^2$$
 [s]

Critical density of linear to saturated regime ¹⁷

$$n_{20} = 0.65 A_i^{0.5} B_T q^{-1} R^{-1}$$

10.8.2 Plasma Toroidal Rotation Scaling

Plasma toroidal rotation (Rice) scaling²⁰

$$\Delta V_{tor} \propto \Delta W/I_p$$

The 2010 multi-machine scaling database found that (with v_a being the Alfvén speed)²⁰

$$v/v_a = 0.65\beta_T^{1.4} q_j^{2.3}$$

where
$$q_i = 2\pi \kappa a^2 B/\mu_0 R I_p$$

10.8.3 L-H Mode Power Scalings

The ITPA empirical scaling law for the L to H mode transition power threshold 16

$$P_{\text{L-H}}[\text{MW}] = 2.15 e^{\pm 0.107} n_{20}^{0.782 \pm 0.037} B_{\text{T}}^{0.772 \pm 0.031} a^{0.975 \pm 0.08} R^{0.999 \pm 0.101}$$

10.9 Turbulence

Fundamental definitions ^{26:422-424}

$$L_n = n/\nabla n$$

$$L_T = T/\nabla T$$

$$b = k_{\theta}^2 \rho_i^2$$

$$\eta_j = L_{nj}/L_{Tj}$$

$$\epsilon = m_j v^2 / 2T_j$$

The diamagnetic drift velocity ^{26:420}

$$\mathbf{v}_{dj} = \frac{\mathbf{B} \times \nabla p_j}{q_j n_j B^2}$$

Diamagnetic frequency ^{26:421}

$$\omega_{*j} = -\frac{k_y T_j}{eBn} \frac{dn}{dr}$$

Ion Larmor radius evaluated at the sound speed ²⁵

$$\rho_S \equiv c_s/\Omega_i$$

Normalized Larmor radius

$$\rho_* \equiv \rho_S/a$$

10.9.1 General Drift Wave Turbulence

Mixing length estimate²⁵

$$\tilde{n}^{\rm rms}/n_0 \sim 1/k_{\perp}L_{\rm n}$$

Density fluctuations and plasma potential correlation²⁵

$$\tilde{n}/n_0 \approx \left(e\tilde{\phi}/kT_e\right)(1-i\delta)$$

where δ is the dissipation of the electron momentum to the background plasma.

Time averaged electrostatic turbulent flux of particles $\tilde{\Gamma}$, momentum $\overleftrightarrow{\mu}$, and heat \tilde{Q}^{25}

$$\tilde{\Gamma} = -\frac{\langle \tilde{n} \nabla \tilde{\phi} \rangle \times \bar{\mathbf{B}}}{B^2} + \langle \tilde{n} \tilde{v}_{||} \rangle \mathbf{B} / B$$

$$\overleftrightarrow{\mu} = \left\langle \left(-\frac{\nabla \widetilde{\phi} \times \bar{\mathbf{B}}}{B^2} + \widetilde{v}_{||} \mathbf{B} / \mathbf{B} \right) \left(-\frac{\nabla \widetilde{\phi} \times \mathbf{B}}{B^2} + \widetilde{v}_{||} \mathbf{B} / \mathbf{B} \right) \right\rangle$$

$$\tilde{Q} \equiv \frac{5}{2}\bar{n}\bar{T} \left[\frac{1}{\bar{T}} \left(-\frac{\langle \tilde{T}\nabla\tilde{\phi}\rangle \times \bar{\mathbf{B}}}{B^2} + \langle \tilde{T}\tilde{v}_{||}\rangle \mathbf{B}/B \right) + \frac{1}{\bar{n}} \left(-\frac{\langle \tilde{n}\nabla\tilde{\phi}\rangle \times \bar{\mathbf{B}}}{B^2} + \langle \tilde{n}\tilde{v}_{||}\rangle \mathbf{B}/B \right) \right]$$

where fluctuating values are marked by a tilde and $\langle \rangle$ is a time average.

Time averaged momentum and and energy fluxes due to fluctuating magnetic fields 25

$$\overleftrightarrow{\mu}^{EM} = \frac{\langle \tilde{B}\tilde{B}\rangle}{\mu_0 \bar{n} M_i}$$


$$\tilde{Q}^{EM} = \frac{\langle \tilde{q}_{||e} \tilde{B} \rangle}{\bar{B}}$$

10.9.2 General Drift Turbulence Characteristics

Perpendicular drift wave turbulence is characterized by ρ_S , with $k_{||} \ll k_{\perp}$ and $k_{\perp}\rho_S$ depending on dissipative mechanism, linear free energy source, and nonlinear energy transfer.

Ion thermal gradient (ITG) turbulence occurs when $\eta_i > \eta_{\rm crit} \sim 1$ and has the following approximate characteristics²⁵

$$k_{\perp} \rho_s \sim 0.1 - 0.5$$

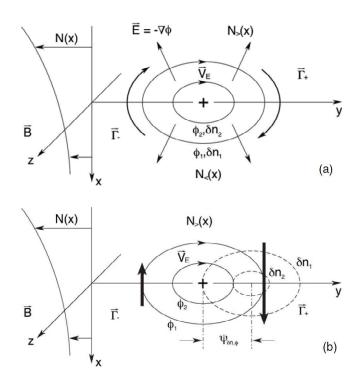

(a) Fluctuations without parallel electron dissipation. (b) Fluctuations with finite electron dissipation. Figure from Tynan et al 2009. Copyright 1999 by the American Physical Society.

$$R/L_{T_i} > R/L_{T_i}|_{crit} \sim 3 - 5$$

$$v_{ph} \sim v_{di}$$

Trapped electron mode (TEM) instabilities occurs at approximately $k_{\perp}\rho_S \sim 1$. At higher wavenumbers the TEM transitions into the electron thermal gradient (ETG) instability with $\eta_e > \eta_{\rm crit} \sim 1$ and the following approximate characteristics ²⁵

$$k_{\perp}\rho_s \sim 1-10$$

$$R/L_{T_e} > R/L_{T_e}|_{\rm crit} \sim 3-5$$

10.9.3 Passing Particle Instabilities

In this section, it is assumed that $k_{||}v_{te} >> \omega >> k_{||}v_{ti}$, such that electrons respond to the electrostatic potential. Also, the frequency of the magnetic curvature drifts is assumed to be $^{26:422}$

$$\omega_{di} = 2L_n \omega_{*i}/R \ll \omega$$

The passing particle dispersion relation ^{26:424}

$$\left[\rho_i^2 \frac{\partial^2}{\partial x^2} - \left(\frac{L_n/R}{b^{1/2} (T_e/T_i) q\Omega}\right)^2 \left(\frac{\partial}{\partial \theta} + ik_\theta sx\right) - \frac{2R/L_n}{(T_e/T_i)\Omega} \left(\cos\theta + \frac{i\sin\theta}{k_\theta} \frac{\partial}{\partial x}\right) - \left(\frac{\Omega - 1}{(T_e/T_i)\Omega + (1 + \eta_i)} + b\right)\right] \tilde{\phi} = 0$$

where x is the distance from the reference mode rational surface m = nq(r) and $\tilde{\phi}$ is the perturbed electrostatic potential.

Ion thermal gradient (ITG, eta-i, η_i) toroidal frequency ^{26:428}

$$\omega_{\rm ITG} \approx (\eta_i \omega_{*i} \omega_{di})^{1/2}$$

ITG critical instability limit ^{26:429}

$$\eta_{ic} = \begin{cases} 1.2 & R/L_n < (R/L_n)_{\text{crit}} \\ \frac{4}{3} \left(1 + \frac{T_i}{T_e} \right) (1 + 2s/q) R/L_n & R/L_n > (R/L_n)_{\text{crit}} \end{cases}$$

where

$$(R/L_n)_{\text{crit}} = \frac{0.9}{(1+T_i/T_e)(1+2s/q)}$$

Electron thermal gradient (ETG, η_e mode) dispersion relation with $T_i \approx T_e$ 26: 429

$$-\frac{k_{\parallel}^{2}v_{te}^{2}}{\omega^{2}}\left(1 - \frac{\omega_{*e}}{\omega}(1 + \eta_{e})\right) + 1 + \frac{\omega_{*e}}{\omega} = 0$$

If $\eta_e\gg 1$ then there is an unstable mode with $^{26:\,429}~\omega\approx (-k_{||}^2v_{te}^2\eta_e\omega_{*e})^{1/3}$

10.9.4 Trapped Particle Modes

The collisionless trapped particle dispersion relation ^{26:432}

$$\frac{1}{\sqrt{2\epsilon}} \left(\frac{1}{T_i} + \frac{1}{T_e} \right) = \frac{1}{T_i} \frac{\omega - \omega_{*i}}{\omega - \bar{\omega}_{di}} + \frac{1}{T_e} \frac{\omega - \omega_{*e}}{\omega - \bar{\omega}_{de}}$$

where

$$\bar{\omega}_{dj} = \frac{\omega_{dj}}{2} \left[\left(\frac{v_{||}}{v_{Thj}} \right)^2 + \left(\frac{v_{\perp}}{2v_{Thj}} \right)^2 \right] \left\{ \cos \theta + \frac{k_r}{k_{\theta}} \sin \theta \right\}$$

This dispersion relation gives rise to the trapped ion mode if $\nu_{\rm eff} = \nu_j/\epsilon > \omega_{dj}$ and has growth/frequency ²⁶: 433–434

$$\omega = \frac{\sqrt{2\epsilon}}{1 + T_e/T_i} \omega_{*e} - i \frac{\nu_i}{\epsilon} + i \frac{\epsilon^2}{(1 + T_e/T_i)^2} \frac{\omega_{*e}^2}{\nu_e}$$

Parameter	Approximate range in k_{θ} (cm ⁻¹)	Approximate length scale(cm)	Mode
	< 1	60	ITG
	< 2	1	ITG, TEM
Density fluctuations (\tilde{n})	< 7	1-10	ITG, TEM
	3-12	1	TEM
	> 20	1, 20	ETG
Temperature fluctuations (\tilde{T}_e)	< 1	1	ITG
Flows, GAMs, ZF	< 1	1	ITG
$\tilde{n_e}\tilde{T_e}$ cross phase	< 1	1	ITG

This mode has the largest imaginary part if $\nu_e \approx \epsilon^{3/2} \omega_{*e}$.

The TEM can be calculated due to the trapped particle dispersion relation. The mode is driven by trapped electron collisions and electron temperature gradients. $^{26:\,434-435}$

If $\nu_{\rm eff} \gg \omega_{*e}$ then the growth rate is

$$\gamma \approx \epsilon^{3/2} \frac{\omega_{*e}^2}{\nu_e} \eta_e$$

Chapter 11

Tokamak Edge Physics

In this chapter, all units are SI with the exception of temperature, which is defined in the historical units of eV (electron-volts).

```
e is the elementary electric charge q is the total particle charge Z is the particle atomic (proton) number T is the plasma temperature n is the plasma number density p is the plasma pressure e and i refer to electrons and ions, respectively e and e0 are the minor and major radii of a toroidal plasma
```

11.1 The Simple Scrape Off Layer (SOL)

The simple SOL model describes 1D plasma flow from the core plasma to material boundary surfaces for limited or diverted plasma along the toroidal magnetic topology. By assuming a high degree of collisionality (ν_*) , fluid approximations for plasma flow are valid and the neoclassical effects on particle orbits due to toroidal magnetic topology can be safely ignored.

Parallel SOL connection length (rail/belt limiters, poloidal divertors) ^{21:17}

$$L_{||} \approx \pi Rq$$

Particle time in the SOL (simple 1D model) ^{21:20}

$$t_{\rm dwell} \approx L_{\parallel}/c_{\rm s}$$

SOL width (simple 1D model) ^{21:23}

$$\lambda_{
m SOL}pprox \left(D_{\perp}L_{\parallel}/c_{
m s}
ight)^{1/2}$$

where D_{\perp} is the anomalous diffusion coefficient.

Force balance / pressure conservation in the SOL $^{21:47}$

$$p_{\rm e} + p_{\rm i} + mnv^2 = {\rm constant}$$

Plasma density variation along the SOL ^{21:47}

$$n(x) = \frac{n_0}{1 + M(x)^2}$$

where n_0 is the density at the 'top' of the SOL and $M = v/c_s$ is the plasma mach number.

Electrons follow a Boltzmann distribution in the SOL ^{21:28}

$$n = n_0 \exp\left(eV/T_e\right)$$

SOL particle sources: ionization (i) and cross-field transport (t) ^{21:35-40}

$$S_{\rm p} = S_{\rm p,i} + S_{\rm p,t} = n_{\rm plasma} n_{\rm neutrals} \langle \sigma v \rangle_{\rm i} + D_{\perp} n / \lambda_{\rm SOL}^2$$

where $\langle \sigma v \rangle_i \equiv \langle \sigma v \rangle_i (T_e, Z)$ is the ionization rate coefficient.

Particle flux density in the SOL at the sheath edge (se) ^{21:47}

$$\Gamma_{\rm se} = \frac{1}{2} n_0 c_{\rm s}$$

where n_0 is the density outside the pre-sheath.

Electric field through SOL required to satisfy the Bohm Criterion ^{21:48}

$$V_{\rm se} = -0.7 \frac{T_{\rm e}}{e}$$

Floating sheath voltage $^{21:79}$

$$V_{\rm s} = 0.5 \frac{T_e}{e} \ln \left[2\pi \frac{m_e}{m_i} \left(Z + \frac{T_i}{T_e} \right) \right]$$

Debye sheath width ^{21:27}

$$\lambda_{\mathrm{Debye}} pprox \left(\frac{\epsilon_0 T_{\mathrm{e}}}{n_{\mathrm{e}} e^2}\right)^{1/2}$$

11.2 Bohm Criterion

The Bohm Criterion is derived from conservation of energy $(1/2m_iv^2 = -eV)$ and particle conservation $(n_iv = constant)$. In an unmagnetized plasma it sets the SOL plasma exit velocity into the sheath edge (se). In magnetized plasma, it sets the SOL plasma exit velocity parallel to the magnetic field, after which the ions become demagnetized and perpendicularly

enter the sheath; electrons remain magnetized. $^{21:61-98}$.

Bohm Criterion (assuming $T_i = 0$) ^{21:73}

$$v_{\rm se} \ge \left(\frac{T_e}{m_i}\right)^{1/2} = c_s$$

Bohm Criterion (general form) ^{21:76}

$$\int_{0}^{\infty} \frac{f_{\rm se}^{i}(v) \, dv}{v^{2}} \le \frac{m_{i}}{T_{e}}$$

11.3 A Simple Two Point Model For Diverted SOLs

Diverted plasmas can obtain significant ΔT along the SOL, resulting in divertor temperatures less than 10 eV. The SOL can be approximated using a two point model: point 1 is the outboard midplane entrance to the SOL ("upstream" or "u") and point 2 is the divertor terminus of the SOL ("target" or "t"). It is assumed that upstream density, n_u , and the heat flux into the SOL, $q_{||}$, are control parameters; upstream and target temperatures, T_u and T_t , as well as plasma density in front of the target, n_t , are subsequently determined.

11.3.1 Definitions

Dynamic and static pressure ^{21:435}

$$p = nT (1 + M^2)$$
 where $\begin{cases} M_{
m u}^2 \ll 1 \\ M_{
m t}^2 \approx 1 \text{ (Bohm Criterion)} \end{cases}$

Heat conduction parallel to magnetic field ^{21:187}

$$q_{\parallel, \text{ cond}} = -k_0 T^{5/2} \frac{dT}{dx}$$
 where
$$\begin{cases} k_{\text{e},0} \approx 2000 \text{ [W m}^{-1} \text{ eV}^{7/2}] \\ k_{\text{i},0} \approx 60 \text{ [W m}^{-1} \text{ eV}^{7/2}] \end{cases}$$

Sheath heat flux transmission coefficient at a biased surface ^{21:652}

$$\gamma = 2.5 \frac{T_i}{ZT_e} - \frac{eV}{T_e} + 2 \left[2\pi \frac{m_e}{m_i} \left(Z + \frac{T_i}{T_e} \right) \right]^{-1/2} \exp\left(\frac{eV}{T_e} \right) + \chi_i$$

where $T_e \neq T_i$, χ_i is the electron-ion recombination energy, and no secondary electrons emitted.

11.3.2 Fundamental Relations

SOL pressure conservation ^{21:224}

$$2n_tT_t = n_uT_u$$

SOL power balance $^{21:224}$

$$T_u^{7/2} = T_t^{7/2} + \frac{7q_{||}L}{2k_0}$$

SOL heat flux limited to sheath heat flux ^{21:224}

$$q_{||} = \gamma n_t T_t c_{st}$$
 ≈ 7 (D-D plasma, floating surface)

11.3.3 Consequences

Upstream SOL temperature ^{21:226}

$$T_u \approx \left(\frac{7q_{||}L}{2k_0}\right)^{2/7}$$
 assuming that $T_t^{7/2} \ll T_u^{7/2}$

- $\rightarrow T_u$ is independent of n_u
- $\rightarrow T_u$ is insensitive to parameter changes due to the 2/7 power
- $\rightarrow q_{\parallel}$ is extremely sensitive to T_u due to the 7/2 power

Target SOL temperature ^{21:227}

$$T_t \approx \frac{2m_i}{\gamma^2 e^2} \frac{q_{\parallel}^{10/7}}{(Lk_0)^{4/7} n_u^2}$$

 $\rightarrow T_t$ is proportional to $\frac{1}{n_s^2}$

Target SOL density ^{21:227}

$$n_T = \frac{n_u^3}{q_{||}^2} \left(\frac{7q_{||}L}{2k_0}\right)^{6/7} \frac{\gamma^2 e^2}{4m_i}$$

 $\rightarrow n_T$ is proportional to n_u^3

Chapter 12

Tokamak Fusion Power

In this chapter, all units are SI with the exception of temperature and energy, which are defined in the historical units of eV (electron-volts).

n is the plasma density; $n_{20} = n/10^{20}$; $n_0 = n_e \approx n_i$ T is the plasma temperature; $T_{keV} = T$ in units of kiloelectron-volts p is the plasma pressure ν is the radial profile peaking factor P is a power density S is a total power U is a total energy E is the nuclear reaction energy gain e is the elementary electric charge q is the total particle charge Z is the particle atomic (proton) number e and i subscripts refer to electrons and ions, respectively D and T refer to deuterium and tritium, respectively κ is the plasma elongation; $\kappa = b/a$ a,b, and R_0 are the 2 minor and major radii of a toroidal plasma V is the volume of the plasma

12.1 Definitions

Fusion power density ^{26:8}

$$P_{\text{fusion}} = n_D n_T \langle \sigma v \rangle_{DT} E_{\text{fusion}} = \frac{1}{4} n_e^2 \langle \sigma v \rangle_{DT} E_{\text{fusion}}$$

Fusion power ^{26:22}

$$\begin{split} S_{\text{total}} &= \frac{\pi}{2} E_{\text{fusion}} \int n^2 \langle \sigma v \rangle_{DT} R \, dS \\ &\stackrel{plasma}{\stackrel{cross}{section}} \\ &= \frac{0.15}{2\nu + 1} Rab \left(\frac{n}{10^{20}}\right)^2 T_{\text{keV}}^2 \quad \text{[MW]} \end{split}$$

where it has been assumed that:

Pressure profile:
$$nT = \hat{n}\hat{T} \left(1 - \frac{r^2}{\tilde{a}^2}\right)^{\nu}$$

Reaction rate: $\langle \sigma v \rangle_{\rm DT} \approx 1.1 \times 10^{-24} T_{\rm keV}^2$
Plasma cross section: $\tilde{a} = (ab)^{1/2}$

Alpha power density ^{26:10}

$$P_{\alpha} = n_D n_T \langle \sigma v \rangle_{DT} E_{\alpha} = \frac{1}{4} n_e^2 \langle \sigma v \rangle_{DT} E_{\alpha} \approx (1/5) P_{\text{fusion}}$$

Neutron power density ²⁶:10

$$P_{\rm neutron} = n_D n_T \langle \sigma v \rangle_{DT} E_{\rm neutron} = \frac{1}{4} n_e^2 \langle \sigma v \rangle_{DT} E_{\rm neutron} \approx (4/5) P_{\rm fusion}$$

Ohmic heating power density ^{26:240}

$$P_{\rm ohmic} \approx \eta J_{\rm plasma}^2$$

Stored energy in confined plasma ^{26:9}

$$W = \int 3nT \, d\tau = 3\langle nT \rangle V$$

Definition of energy confinement time ^{26:9}

$$\tau_E = \frac{\text{Stored energy in the confined plasma}}{\text{Power lost from the confined plasma}} = \frac{W}{S_{\text{loss}}}$$

Power loss from a confined plasma due to conduction ^{26:9–10}

$$P_{\text{conduction}} = \frac{3nT}{\tau_E}$$

Power loss from a confined plasma due to bremsstrahlung radiation ^{26: 227–228}

$$P_{\rm bremsstrahlung} \approx (5.35 \times 10^{-37}) Z^2 n_e n_i T_{\rm keV}^{1/2} \quad [{\rm W~m}^{-3}]$$

12.2 Power Balance in a D-T Fusion Reactor

Confined fusion plasmas are not in thermal equilibrium, and, therefore, power must be balanced in a steady-state tokamak reactor. Power that is lost from the confined plasma due to conduction, radiation and other mechanisms must be continuously replenished by alpha particle and auxilliary heating mechanisms.

$$0 = (P_{\text{alpha}} + P_{\text{auxilliary}}) - (P_{\text{conduction}} + P_{\text{bremsstrahlung}} + \dots)$$
 where

$$P_{\text{auxilliary}} = P_{\text{ohmic}} + P_{\text{ICH}} + P_{\text{ECH}} + P_{\text{neutral beam}} + \dots$$

12.2.1 Impurity Effects on Power Balance

The fractional impurity densities $f_j = n_j/n_0$ in the plasma core cause:

(a) Modified quasi-neutrality balance ^{26:36}

$$n_e = n_D + n_T + \sum_j Z n_j$$

(b) Increased radiated power loss ³

$$P_{\text{bremsstrahlung}} \approx (5.35 \times 10^{-37}) n_e^2 T_{\text{keV}}^{1/2} Z_{\text{eff}} \quad [\text{W m}^{-3}]$$

(c) Dilution of fusion fuel ³

$$P_{\text{alpha}} = \frac{1}{4} n_e^2 (1 - \sum_j f_j Z_j)^2 \langle \sigma v \rangle E_{\alpha}$$

12.2.2 Metrics of Power Balance

The physics gain factor for D-T plasma ^{26:12}

$$Q_{\rm phys} = \frac{\frac{1}{4}n_e^2 \langle \sigma v \rangle E_{\rm fusion} \cdot V_{\rm plasma}}{P_{\rm heating}} = \frac{5P_\alpha}{P_{\rm heating}}$$

where

- (a) $Q_{\text{phys}}=1$ is break even
- (b) $Q_{\rm phys} > 5$ is a burning plasma
- (c) $Q_{\rm phys} = \infty$ is an ignited plasma

The engineering gain factor ³

$$Q_{\rm eng} = \frac{P_{\rm electricity}^{\rm out}}{P_{\rm electricity}^{\rm in}}$$

12.3 The Ignition Condition (or Lawson Criterion)

The ignition condition describes the minimum values for density (n), temperature (T), and energy confinement time (τ_E) that are required for a confined plasma to reach ignition. Ignition is defined as $P_{\rm alpha} > P_{\rm loss}$, where $P_{\rm auxilliary} = 0$. ^{26: 10-15} For a given temperature, T, the following equations describe the minimum $n\tau_E$ required to reach ignition under different assumptions:

(a)
$$P_{\rm alpha} = P_{\rm conduction}^{26:10-11}$$

$$n\tau_E = \frac{12kT}{\langle \sigma v \rangle E_{\alpha}}$$
 Using $\langle \sigma v \rangle_{DT} \approx 1.1 \times 10^{-24} T_{\rm keV}^2$ and $E_{\alpha} = 3.5 \, {\rm MeV}^{-3}$:
$$nT\tau_E \gtrsim 3 \times 10^{21} \, {\rm m}^{-3} \, {\rm keV} \, {\rm s}$$

(b)
$$P_{\text{alpha}} = P_{\text{conduction}} + P_{\text{bremsstrahlung}}^{3}$$
:
$$n\tau_{E} = \frac{12kT}{\langle \sigma v \rangle E_{\alpha} - 2.14 \times 10^{-36} T_{\text{keV}}^{1/2}}$$

(c) $P_{\rm alpha} = P_{\rm conduction} + P_{\rm bremsstrahlung}$ with alpha impurities $f_{\alpha} = n_{\alpha}/n_e$ ³:

$$n\tau_E = \frac{12kT}{(1 - 2f_{\alpha})^2 \langle \sigma v \rangle E_{\alpha} - (1 + 2f_{\alpha})2.14 \times 10^{-36} T_{\text{keV}}^{1/2}}$$

(d) $P_{\text{alpha}} = P_{\text{conduction}} + P_{\text{bremsstrahlung}}$ with impurity densities $f_j = n_j/n_e^{-3}$:

$$n\tau_E = \frac{12kT}{(1 - \sum_j f_j Z_j)^2 \langle \sigma v \rangle E_\alpha - (2.14 \times 10^{-36}) Z_{\text{eff}} T_{\text{keV}}^{1/2}}$$

Chapter 13

Tokamaks of the World

```
• Comprehensive list of all major tokamaks with parameters
  www.tokamak.info
• ASDEX-U (Garching, Germany)
  http://www.ipp.mpg.de/ippcms/eng/for/projekte/asdex/techdata.html
• Alcator C-Mod (Cambridge, USA)
  http://www.psfc.mit.edu/research/alcator/
• DIII-D (San Diego, USA)
  https://fusion.gat.com/global/Home
• EAST (Hefei, China)
  http://english.hf.cas.cn/ic/ip/east
\bullet FTU (Frescati, Italy)
  http://www.efda.org/eu_fusion_programme/machines-ftu_i.htm
• Ignitor (Kurchatov, Russia)
  http://www.frascati.enea.it/ignitor
• ITER (Cadarache, France)
  http://www.iter.org/mach
• JET (Culham, United Kingdom)
  http://www.jet.efda.org/jet/jets-main-features
• J-TEXT (Wuhan, China)
  http://www.jtextlab.com/EN/SortInfo.aspx?sid=43
• JT-60SA (Naka, Japan)
  http://www-jt60.naka.jaea.go.jp/english/figure-E/html/figureE_jt60sa_5.html
• KSTAR (Daejeon, S. Korea)
```

http://www.pppl.gov/kstar/html/about_kstar.html

• NSTX-U (Princeton, USA) http://nstx-u.pppl.gov/

- SST-1 (Gandhinagar, India) http://www.ipr.res.in/sst1/SST1parameters.html
- T-10 (Kurchatov, Russia)
- T-15U (Kurchatov, Russia)
 www.toodlepip.com/tokamak/t15-ft_p7-3.pdf
- TCV (Lausanne, Switzerland) https://crppwww.epfl.ch/tcv
- TEXTOR (Jülich, Germany) http://www2.fz-juelich.de/ief/ief-4//textor_en
- TFTR (Princeton, USA) http://w3.pppl.gov/tftr/info/tftrparams.html
- Tore Supra (Cadarache, France)
 http://www-fusion-magnetique.cea.fr/gb/index.html

Tokamak	R (m)	a (m)	ϵ	B_{ϕ}^{a} (T)	$I_{ m p} \ m (MA)$	κ	δ	Vp (m ⁻³)	Pulse (s)	Config^b	PFC ^c	ICRH (MW)	ECRH (MW)	LHCD (MW)	Beam (MW)
ASDEX-U	1.65	0.5	0.30	3.1	1.4	1.8	0.4	14	10	SN	C/W	6	4	-	20
C-Mod	0.67	0.22	0.33	8	2	1.7	0.6	1.0	2.5	L/SN/DN	M	6	-	1	-
DIII-D	1.66	0.67	0.40	2.2	3	2.6	1.0	12	5	SN/DN	C	5	6	-	20
EAST	1.70	0.40	0.24	$3.5~\mathrm{SC}$	0.5	2	0.5	13	1000	DN/SN	\mathbf{C}	3	0.5	4	-
FTU	0.93	0.3	0.32	8	1.6	1.7	0.55	3	1.5	L	SS/M/W	0.5	1.3	2.5	-
$\operatorname{Ignitor}^{\boldsymbol{d}}$	1.32	0.47	0.36	13	11	1.83	0.4	11	10	L	M	(18-24)	-	-	-
ITER ^e	6.2	2	0.32	$5.3~\mathrm{SC}$	17	1.86	0.5	837	400	SN	$\mathrm{Be/C/W}$	20	20	-	33
JET	2.96	0.96	0.32	3.8	5	1.7	0.33	200	92	L/SN/DN	Be/W	-	7	-	34
$\mathrm{JT}\text{-}60\mathrm{SA}^f$	3.16	1.02	0.32	$2.7~\mathrm{SC}$	5.5	1.83	0.57	132	100	DN	\mathbf{C}	-	7	-	34
J-TEXT	1.05	0.26	0.25	3	0.4	1	-	1.4	0.3	L/SN/DN	\mathbf{C}	-	-	-	-
KSTAR	1.8	0.5	0.28	3.5	2.0	2.0	0.8	18	20	DN	C	6	-	1.5	8
NSTX-U	0.93	0.57	0.61	1.0	2.0	2.5	0.3	15	5	SN/DN	C/Li	3	0.35	-	10
SST-1 g	1.1	0.2	0.18	3C	0.22	1.9	0.8	2	1000	DN	$^{\mathrm{C}}$	1.5	0.2	1	0.8
T-10	1.5	0.36	0.24	5	0.8	1	-	4	1	L	SS/C	-	2	-	-
T-15	2.43	0.42	0.17	$3.5~\mathrm{SC}$	1	1.47	0.25	12	1000	SN	$^{\mathrm{C}}$	-	7	4	9
TCV	0.88	0.25	0.28	1.4	1.2	2.8	-0.7-1	3	4	L/SN/DN	SS/C	-	4.5	-	-
Textor	1.75	0.47	0.27	2.8	0.8	1	-	8	10	L/SN	SS/C	4	1	-	4
TFTR ^h	2.52	0.87	0.35	5.6	2.7	1	-	6	10	L	С	12.5	-	-	39.5
Tore Supra	2.25	0.7	0.31	$4.5~\mathrm{SC}$	1.7	1	-	22	390	L	С	9	2.4	5	1.7

^aMagnet coils are conducting unless denoted as superconducting (SC)

^bPlasma configuration: L = limited; SN = diverted single null; DN = diverted double null

^cPlasma Facing Components: Be = beryllium; C = CFC/graphite; Li = lithium; M = molybdenum; SS = stainless steel; W = tungsten

^dProposed; construction not begun

 $[^]e\mathrm{Construction}$ begun; first plasma predicted 2019

 $[^]f\mathrm{Construction}$ begun: first plasma predicted 2014

 $[^]g{\rm Construction}$ begun: first plasma predicted 2012

^hDecommissioned in 1997

References

- [1] M. Boas. Mathematical Methods in the Physical Sciences. John Wiley & Sons, 1983.
- [2] H.-S. Bosch and G.M. Hale. Improved formulas for fusion cross-sections and thermal reactivities. *Nuclear Fusion*, 32(4):611, 1992. URL http://stacks.iop.org/0029-5515/32/i=4/a=I07.
- [3] Calculated, derived or produced by the authors of the Magnetic Fusion Energy Formulary explicitly for this work.
- [4] M.B. Chadwick, P Obložeinský, et al. ENDF/B-VII.0: Next Generation Evaluated Nuclear Data Library for Nuclear Science and Technology. Nuclear Data Sheets, 107(12):2931 3060, 2006. ISSN 0090-3752. doi: 10.1016/j.nds.2006.11.001. URL http://www.sciencedirect.com/science/article/pii/S0090375206000871. Evaluated Nuclear Data File ENDF/B-VII.0.
- [5] F. F. Chen. Introduction to Plasma Physics and Controlled Fusion. Springer Science, 2006.
- [6] J G Cordey. A review of non-inductive current drive theory. Plasma Physics and Controlled Fusion, 26(1A):123, 1984. URL http://stacks.iop.org/0741-3335/26/i=1A/a=311.
- [7] J. P. Freidberg. *Ideal Magnetohydrodynamics (Out of Print)*. Plenum Press, 1987.
- [8] J. P. Freidberg. *Plasma Physics and Controlled Fusion*. Cambridge University Press, 2007.
- [9] W. L. Granatstein and P. L. Colestock. Wave Heating and Current Drive in Plasmas. Gordon and Breach Science, 1985.
- [10] D. J. Griffiths. Introduction to Electrodynamics. Prentice Hall, 1999.
- [11] P. Helander and D. Sigmar. Collisional Transport in Magnetized Plasmas. Cambridge University Press, 2002.
- [12] J.D. Huda. *NRL Plasma Formulary*. The Office of Naval Research, 2007.
- [13] J. D. Jackson. Classical Electrodynamics. John Wiley & Sons, 1999.

110 REFERENCES

[14] A. Jeffrey. Handbook of Mathematical Formulas and Integrals. Academic Press, 2008.

- [15] K. S. Krane. Introductory Nuclear Physics. John Wiley & Sons, 1988.
- [16] Y R Martin, T Takizuka, and the ITPA CDBM H-mode Threshold Database Working Group. Power requirement for accessing the H-mode in ITER. *Journal of Physics: Conference Series*, 123(1):012033, 2008. URL http://stacks.iop.org/1742-6596/123/i=1/a=012033.
- [17] ITER Physics Expert Group on Confinement, Transport, ITER Physics Expert Group on Confinement Modelling, Database, and ITER Physics Basis Editors. Chapter 2: Plasma confinement and transport. Nuclear Fusion, 39(12):2175, 1999. URL http://stacks.iop.org/0029-5515/39/i=12/a=302.
- [18] R. R. Parker. Course Notes (MIT Course 22.105 Electromagnetic Interactions. 2007.
- [19] M. Porkolab. Course Notes (MIT Course 8.624 Plasma Waves. 2008.
- [20] J.E. Rice, A. Ince-Cushman, et al. Inter-machine comparison of intrinsic toroidal rotation in tokamaks. *Nuclear Fusion*, 47(11):1618, 2007. URL http://stacks.iop.org/0029-5515/47/i=11/a=025.
- [21] P. C. Stangeby. The Boundary of Magnetic Fusion Devices. Taylor & Francis, 2000.
- [22] T. H. Stix. Waves in Plasma. Springer Science, 1992.
- [23] I. J. Thompson and F. M. Nunes. *Nuclear Reactions for Astrophysics*. Cambridge University Press, 2009.
- [24] F. Troyon, R. Gruber, H. Saurenmann, S. Semenzato, and S. Succi. Mhd-limits to plasma confinement. *Plasma Physics and Controlled Fusion*, 26(1A):209, 1984. URL http://stacks.iop.org/0741-3335/26/i=1A/a=319.
- [25] G. R. Tynan, A. Fujisawa, and G. McKee. Α reexperimental drift turbulence studies. PlasmaPhysics and Controlled Fusion, 51(11):113001, URL http://stacks.iop.org/0741-3335/51/i=11/a=113001.
- [26] J. Wesson. Tokamaks (3rd Edition). Oxford University Press, 2004.
- [27] Wolfram Mathworld, 2011. Elliptic Torus. Available at http://mathworld.wolfram.com/EllipticTorus.html.

Index

Γ factor, 69	Braginskii thermal diffusivity coeffi-
β_N , 88	cients, 62
ϵ , 83	Bremsstrahlung power losses, 102
ν_* , 64	Brewster's angle, 31
$\rho_*, 91$	Canasitanas 20
ρ_S , 91	Capacitance, 28
ζ function, 69	Center of mass transformation, 37
$q, q_*, 85$	Charged particle interactions, 74
1/R force, 87	Circuit electrodynamics, 27
Al . CDf l 10F	Classical transport, 50
Alcator C-Mod, 105	Classical transport, 59
Alfvén speed, 45	Cold plasma dispersion relation, 65
Ampere's law, 25	Cold plasma waves
Appleton-Hartree, 66	L-wave, 66
ASDEX-U, 105	Light wave, 66
Astrophysical S-factor, 77	O-wave, 66
Atomic constants, 21	R-wave, 66
D	X-wave, 66
Banana regime, 64	Collision frequencies
Basis functions of Laplace's equation,	Definition, 39
	Evaluation, 39
Beam-electron collision frequency, 40	Collision frequency scalings, 39
Beam-ion collision frequency, 41	Collision operator relations, 51
Bessel functions	Collision operators, 60
Asymptotic forms, 14	Collisionality, 64
equation, 13	Complimentary error function, 19
Modified asymptotic forms, 16	Compressional Alfvén wave, 68
Modified equation, 14	Compton scattering, 76
Modified useful relations, 15	Conduction power losses, 102
Plots, 14	Connection length, 97
Useful relations, 14	Connor-Hastie limit, 47
Beta limit, see Troyon limit	Conservation laws, 28
Bethe formula, 75	Conservation of charge, 29
Binary coulomb collisions, 37	Coulomb force, 26
Biot-Savart law, 26	Coulomb logarithm, 39
Bohm criterion, 98	Couloumb gauge, 32
Bootstrap current, 89	Crook collision operator, 62
Bounce frequency, 63	Cross sections
Bound electric charge, 27	Definitions, 76
Braginskii diffusion coefficient, 60	Parametrization, 79

Plotted data, 81	Equations
Tabulated values, 79	1D cylindrical diffusion, 59
Curl theorem, see Stoke's theorem	Bessel's equation, 13
Curvature drift, 36	Grad-Shafranov, 54
Cyclotron frequency	Legendre's equation, 13
in plasmas, 43	Maxwell's, 25
Cylindrical coordinate systems, 10	Vlasov, 49
,	Wave, 30
Debye length, 44	Error function, 18
Debye sphere, 44	ETG, see Electron thermal gradient
Density limit, see Greenwald limit	instability
Diamagnetic drift frequency, 91	External inductance, 86
Diamagnetic drift velocity, 91	
Diamagnetic plasmas, 87	Faraday's law, 25
DIII-D, 105	Fast Magnetosonic wave CD, 90
Dipoles, 27	First adiabatic invariant, 37
Displacement electric field, 27	Fokker-Planck collision operator, 60
Divergence theorem, see Gauss's the-	Fresnel equations, 31
orem	Frozen-in law, 53
Driecer electric field, 47	FTU, 105
Drifts	Fundamental theorem of calculus, 12
Curvature, 36	Commo interactions 75
$E \times B, 36$	Gamma interactions, 75
$\operatorname{grad-B}, 36$	Gauss's law, 25 Gauss's theorem, 12
Polarization, 36	Gaussian integrals, 16
	Goldston scaling, see Energy confine-
$E \times B \text{ drift}, 36$	ment scalings
EAST, 105	Grad-B drift, 36
Electric field of a moving charge, 32	Grad-Shafranov equation, 54
Electric potential, 25	Greenwald limit, 88
Electromagnetic force density, 29	Gryo motion in E and B fields, 35
Electron collision time, 40	Gyro radius
Electron thermal gradient instability,	in plasmas, 44
93, 94	in plasinas, 44
Electron-electron collision frequency,	H-field, 27
39	Heat conduction, 99
Electron-ion collision frequency, 39	Heat flux transission coeficient, 99
Electrostatic boundary conditions	Hoop force, 86
In matter, 27	Hot plasma waves, 68
In vacuum, 26	Electromagnetic, 70
Electrostatic waves, 67	Electromagnetic (maxwellian), 71
Electrostatics, 25	Electrostatic, 68
Elongation, 83	
Energy confinement scalings, 90	Ignition condition, 103
Energy confinement time, 102	Ignitor, 105
Energy stored in EM fields, 26	Index of refraction, 31
Energy transfer time, 40	Inductance, 28
Engineering gain factor, 103	Inductance of plasma, 86

Inductive current, 89	Magnetohydrodyamics, 52
Intensity, 30, 31	Maxwell's equations
Internal inductance, 86	In matter, 27
Inverse aspect ratio, 83	In vacuum, 25
Ion collision time, 40	Maxwell's stress tensor, 29
Ion thermal gradient instability, 92,	Maxwellian distribution function, 45
94	MHD Equations, 53
Ion-electron collision frequency, 39	MHD equilibrium equations, 54
Ion-impurity collision time, 40	MHD stability, 54
Ion-ion collision frequency, 39	MHD waves, 68
ITER, 105	Mirroring condition, 37
ITG , see Ion thermal gradient insta-	NI 1 1 1 CO
bility	Neoclassical transport, 62
I DENTE 105	Neutral beam current drive, 89
J-TEXT, 105	Neutral beam energy loss, 41
JET, 105	Neutral beam heating, 88
JT-60SA, 105	Neutron interactions, 75
Klein-Nishina cross section, 76	Neutron lethargy, 75
KSTAR, 105	NSTX-U, 105
100	Nuclear binding energy, 74
L-H mode power scalings, 91	Nuclear Constants, 21
Large aspect ratio expansion, 83	Nuclear Interactions, 74
Lawson criterion, see Ignition condi-	Nuclear mass, 73
tion	Ohm's law
Legendre polynomials, 12	Macroscopic, 28
Legendre's equation, 13	Microscopic, 28
LHCD, 89	Ohmic heating, 88
Lienard-Wiechert potentials, 32	One fluid model of plasma, 51
Lindear regime scaling, 90	One-fluid equations, 52
Lorentz force law, 26	
Lorentz gauge, 32	Paramagnetic plasmas, 87
Lower hybrid oscillations, 67	Partial differential equations, 16
3.5.1	Particle transport coefficients
Mach number, 45	Classical, 60
Magnetc field of a moving charge, 33	Neoclassical, 63
Magnetic boundary conditions	Passing particle dispersion relation,
In matter, 27	93
In vacuum, 26	Passing particle modes, 93
Magnetic inductance, 86	Pfirsch-Schluter regime, 64
Magnetic mirroring, 36	Physics gain factor, 103
Magnetic moment, 36	Plasma distribution function, 45
Magnetic shear, 85	Plasma frequencies, 43
Magnetic turbulence flux of energy,	Plasma oscillations, 67
92 Magnetia turbulanga flur of maman	Plasma parameter, 44
Magnetic turbulence flux of momen-	Plasma pressure, 84
tum, 92 Magnetic vector potential, 25	Plasma resistivity, 47 Plasma temporature definition, 46
Magnetization 27	Plasma temperature definition, 46
Magnetization, 27	Plateau regime, 64

Polarization, 27 Polarization drift, 36	Stopping power, 75 Stored plasma energy, 102
Poloidal beta, 84 Poloidal magnetic field, 85	Surface area of a torus, 84 Suydam's criterion, 56
Power balance, 102	T-10, 105
Power densities, 101 Poynting vector, 29	T-15U, 105
Poynting's theorem, 29	TCV, 105
1 by henry 8 theorem, 29	TEM, see Trapped electron mode
Q	TEXTOR, 105
Fusion, 103	TFTR, 105
Nuclear reactions, 74	Thermal diffusivities (Classical), 62
Quasi-transverse waves, 67	Thermal equilibration, 40
Dadial alastria field 94	Thermal speed, 43
Radial electric field, 84	Times
Radiation pressure, 30 Radius of curvature, 36	electron collision, 40
Random walk diffusion coefficient, 60	electron slowing down, 47
Reaction rates	energy transfer, 40
Definitions in plasma, 77	ion collision, 40
Parametrization, 80	ion-impurity collision, 40
Plotted data, 81	Tire tube force, 87
Tabulated values, 80	Tore Supra, 105
Reaction threshold energy, 74	Toroidal beta, 84
Reduced mass, 38	Toroidal force balance, 86
Reflection coefficient, 31	Toroidal magnetic field, 85
Retarded time, 32	Toroidal plasma volume, 84
Rice scaling, see Toroidal rotation scal-	Toroidal rotation scalings, 91
ing	Transmission coefficient, 31
Rodrigues' formula, 13	Trapped electron mode, 93, 95
Rosenbluth collision operator, 61	Trapped ion mode, 94
Runaway electrons, 47	Trapped particle condition, 63
	Trapped particle dispersion relation,
Safety factor, 85	94
Scrape off layer (SOL), 97	Trapped particle fraction, 37
Screw pinch stability, 56	Trapped particle modes, 94
Semi-empirical mass formula, 73	triangularity, 83
Shafranov shift, 87	Trivelpiece-Gould, 67
Shear Alfvén wave, 68 Single partiele drifts, 26	Troyon limit, 88
Single particle drifts, 36	Turbulence, 91
Snell's law, 31 Sommerfeld parameter, 77	Turbulent flux of energy, 92
Sound speed, 45	Turbulent flux of momentum, 92
Sound wave, 68	Turbulent flux of particles, 92
Speed of light in material, 30	Two fluid model of plasma, 49
Spherical coordinate systems, 11	Two point model, 99
Spitzer resistivity, 47	Unit definitions, 21
SST-1, 105	Universal constants, 21
Stoke's theorem, 12	Upper hybrid oscillations, 67
 	11 3

 $\label{eq:Vector identities, 9} Vertical magnetic field, 87 \\ Vlasov equation, 49 \\ Volume of a torus, 84 \\ Wave equation, 30 \\ Wave polarization, 66 \\ Z_{eff}, 45 \\$