


FOX VALLEY TRAFFIC PAINT BLUE

CHINA

CHINA CODE

002, 003, 004, 006, 007, 009, 010, 015, 017, 026, 027, 033, 041, 048, 050, 052, 066, 102, 104, 107, 109, 110, 111, 112, 114

ACTION	
009	Eliminate ignition sources
010	Stop leak, if safe to do so
015	Absorb with dry agent
017	Avoid contact with skin
026	Keep area and containers cool
027	Ventilate area
EFFECTS OF MULTIPLE EXPOSURE	
066	Danger of cumulative effects
EFFECTS WITH WATER	
041	Does not mix
EXTINGUISHING MEDIA	
033	Foam
HAZARDS	
052	Vapours / Gas heavier than air
PHYSICAL PROPERTIES	
048	Solid
050	Gas
PROTECTIVE CLOTHING	
002	Chemical splash suit
003	Gas-tight chemical resistant suit
004	Breathing apparatus
006	Limit exposure to 1 BA set (30 mins)
007	For protection, seek specialist advice
RISKS	
102	Toxic fumes in fire
104	Vapours may cause suffocation
107	Risk of explosion when heated under confinement
109	Harmful by inhalation
110	Harmful in contact with skin
111	Harmful if swallowed
112	Irritating to eyes
114	Irritating to skin

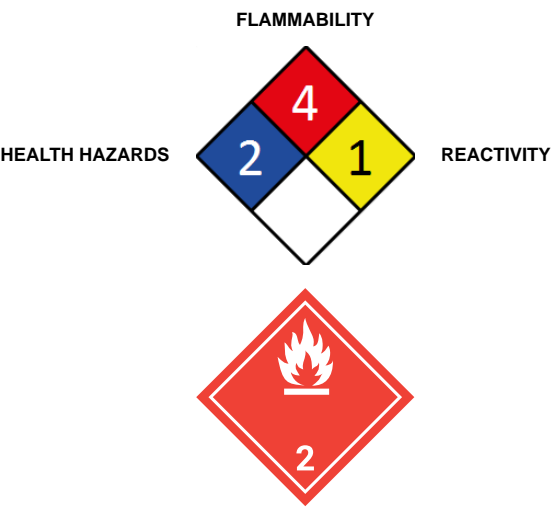

EVACUATION - FIRE

When any large container (including road and rail tankers) is involved in a fire,consider evacuation by "100" metres in all directions.

REGULATION

UN NO	1950	EPG	2D1
DG Class	2.1	ERG Code	49
Subsidiary Hazard	Not Applicable		
Packing Group	Not Applicable		
HAZCHEM	Not Applicable		
Proper shipping name	AEROSOLS		

MINOR SPILLS

- ▶ Clean up all spills immediately.
- ▶ Avoid breathing vapours and contact with skin and eyes.
- ▶ Wear protective clothing, impervious gloves and safety glasses.
- ▶ Shut off all possible sources of ignition and increase ventilation.
- ▶ Wipe up.
- ▶ If safe, damaged cans should be placed in a container outdoors, away from all ignition sources, until pressure has dissipated.
- ▶ Undamaged cans should be gathered and stowed safely.

MAJOR SPILLS

- ▶ Remove leaking cylinders to a safe place if possible.
- ▶ Release pressure under safe, controlled conditions by opening the valve.
- ▶ DO NOT exert excessive pressure on valve; DO NOT attempt to operate damaged valve.
- ▶ Clear area of personnel and move upwind.
- ▶ Alert Fire Brigade and tell them location and nature of hazard.
- ▶ May be violently or explosively reactive.
- ▶ Wear breathing apparatus plus protective gloves.
- ▶ Prevent, by any means available, spillage from entering drains or water courses
- ▶ No smoking, naked lights or ignition sources.
- ▶ Increase ventilation.
- ▶ Stop leak if safe to do so.
- ▶ Water spray or fog may be used to disperse / absorb vapour.
- ▶ Absorb or cover spill with sand, earth, inert materials or vermiculite.
- ▶ If safe, damaged cans should be placed in a container outdoors, away from ignition sources, until pressure has dissipated.
- ▶ Undamaged cans should be gathered and stowed safely.
- ▶ Collect residues and seal in labelled drums for disposal.