


# STATIC ROUTING

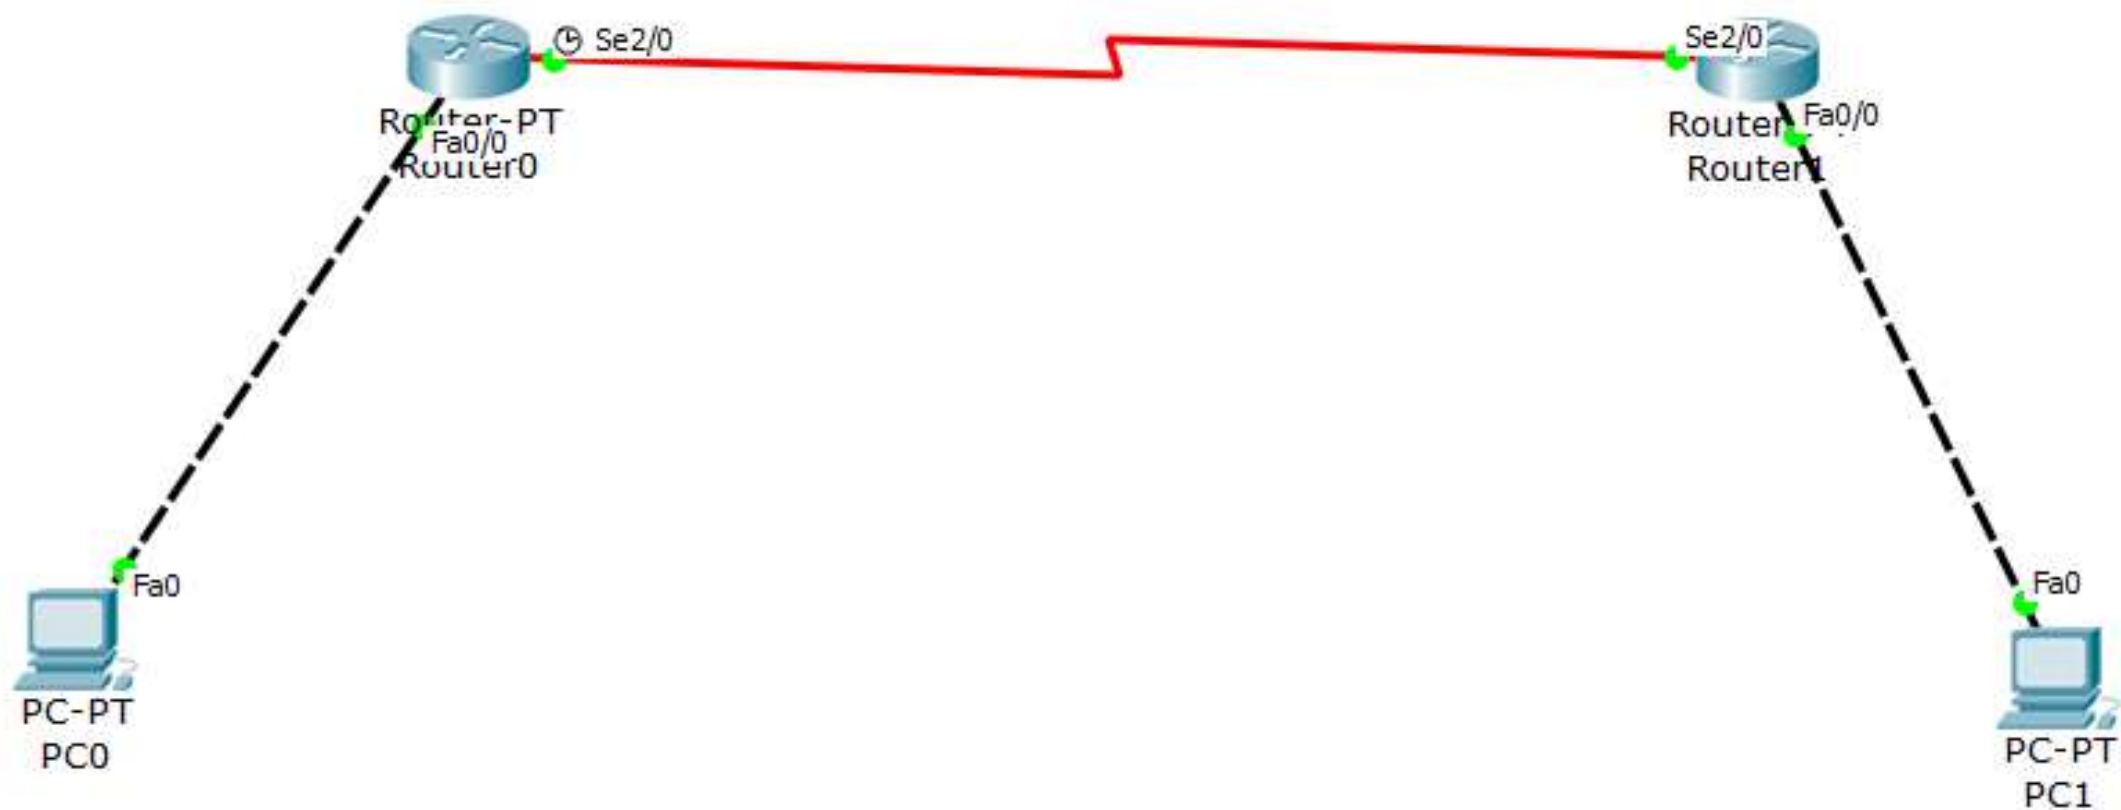

**GLOBAL**

Settings

Routing Algorithm Settings

**ROUTING**

Static

RIP

**INTERFACE**

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

**Static Routes**

Network

Mask

Next Hop

Add

Network Address

192.168.1.0/24 via 192.168.2.1

192.168.1.0/24 via 192.168.2.0

Remove

**Equivalent IOS Commands**

```
Router(config)#router rip
Router(config-router)#
Router(config-router)#exit
Router(config)#
```

**GLOBAL**

Settings

Algorithm Settings

**ROUTING**

Static

RIP

**INTERFACE**

FastEthernet0/

FastEthernet1/

Serial2/0

Serial3/0

## Static Routes

Network

Mask

Next Hop

Add

Network Address

192.168.2.0/24 via 192.168.1.1

192.168.2.0/24 via 192.168.1.0

Remove

## Equivalent IOS Commands

```
Router#configure terminal
Enter configuration commands, one per line.  End
with CNTL/Z.
Router(config) #
```