

Cisco Packet Tracer - D:\star.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical

Root

00:27:00

```
graph TD; S[2960 24TT Switch] --- PC0[PC-PT PC0]; S --- PC1[PC-PT PC1]; S --- PC2[PC-PT PC2]; S --- PC3[PC-PT PC3];
```

Time: 00:00:54

Scenario 0

Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete

New Delete

Toggle PDU List Window

(Select a Device to Drag and Drop to the Workspace)

Cisco Packet Tracer - D:\star.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x:575,y:27

Root

00:45:30

PC2

Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>

Top

PC-PT PC0

2960 24TT Switch0

PC-PT PC1

PC-PT PC2

PC-PT PC3

Time: 00:01:31

Scenario 0

Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete


New Delete

Toggle PDU List Window

Realtime Simulation

4331 4321 1941 2911 81910N 819K0N 829 1240 PTPass PTErr 1841 2620M 2

(Select a Device to Drag and Drop to the Workspace)

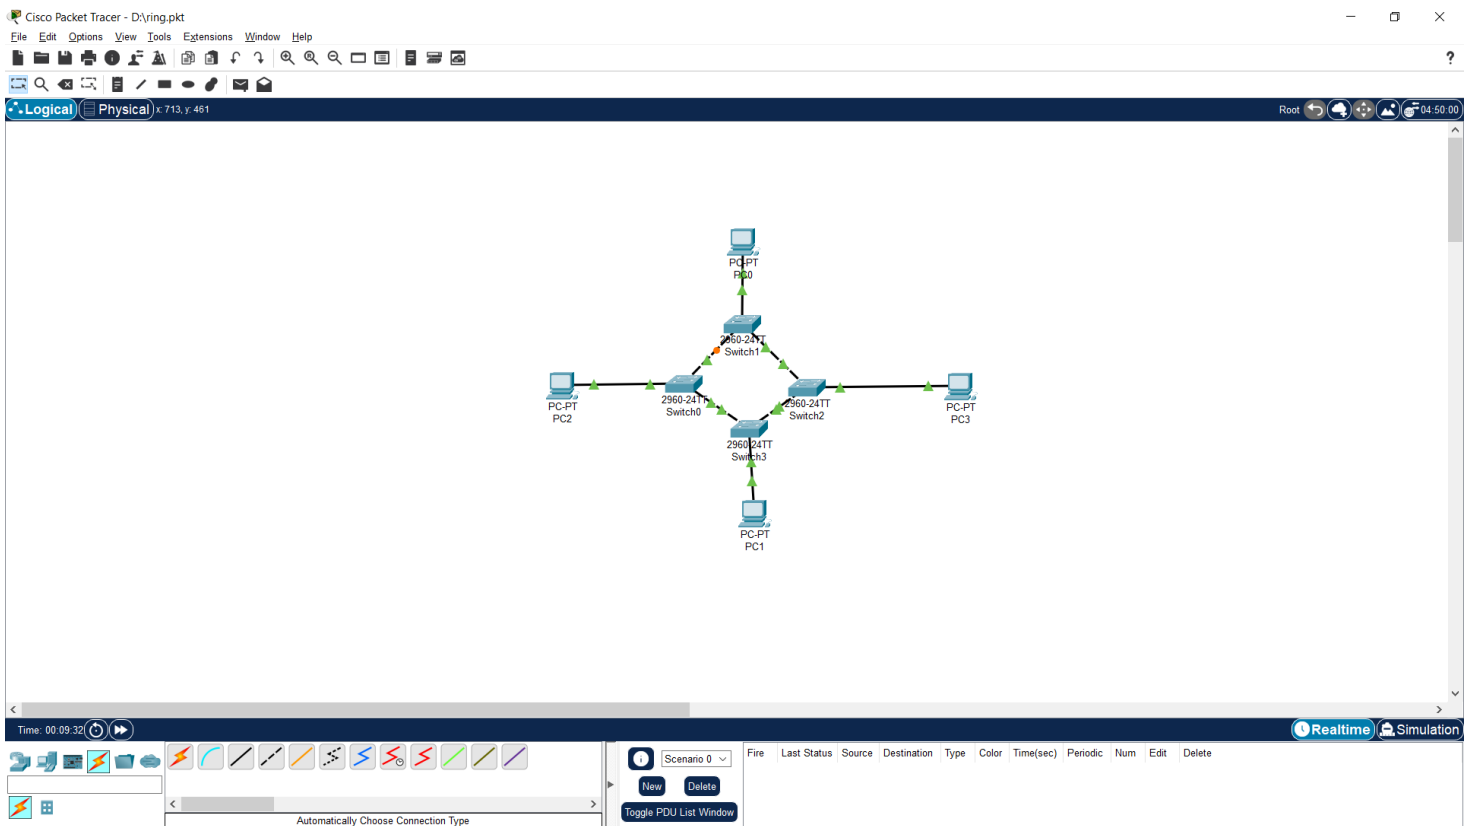

Cisco Packet Tracer - D:\ring.pkt

File Edit Options View Tools Extensions Window Help

LogicalPhysicalx: 718, y: 356

Root

04:59:00

PC2

Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=16ms TTL=128
Reply from 192.168.1.2: bytes=32 time=10ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 16ms, Average = 6ms

C:\>

Top

Time: 00:09:51

RealtimeSimulation

Scenario 0

New Delete

Toggle PDU List Window

Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete

Automatically Choose Connection Type

Cisco Packet Tracer - D:\mesh.pkt

File Edit Options View Tools Extensions Window Help

Logical

Physical

x: 648, y: 524

Root

00:45:30

Time: 00:01:31

Realtime

Simulation

Scenario 0

New

Delete

Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
------	-------------	--------	-------------	------	-------	-----------	----------	-----	------	--------

(Select a Device to Drag and Drop to the Workspace)

Cisco Packet Tracer - D:\mesh.pkt

File Edit Options View Tools Extensions Window Help

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.5

Pinging 192.168.1.5 with 32 bytes of data:

Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

2960-24TT Switch0 2960-24TT Switch1 PC-PT PC2 2960-24TT Switch2 2960-24TT Switch3 PC-PT PC3

Time: 00:03:44

Scenario 0

Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete

New Delete

Toggle PDU List Window

2811 IOS15

Realtime Simulation