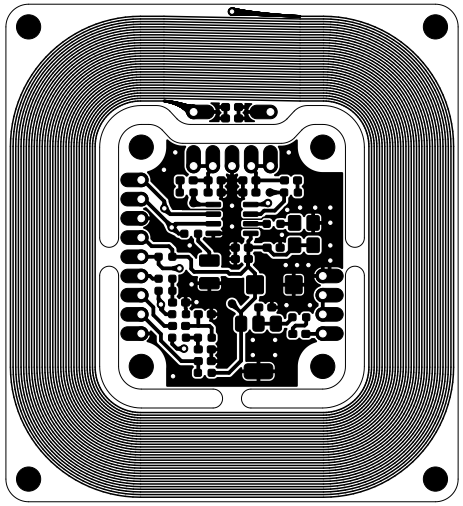

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 1/16

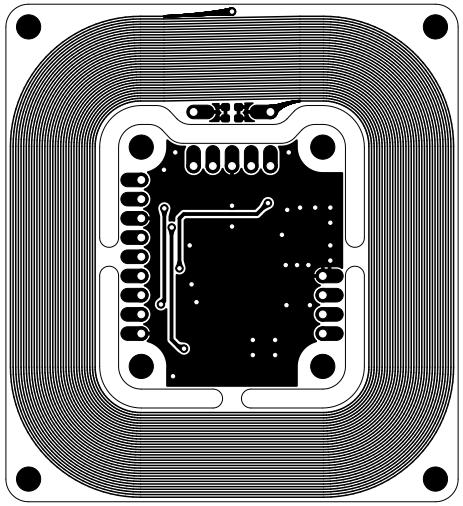

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 2/16

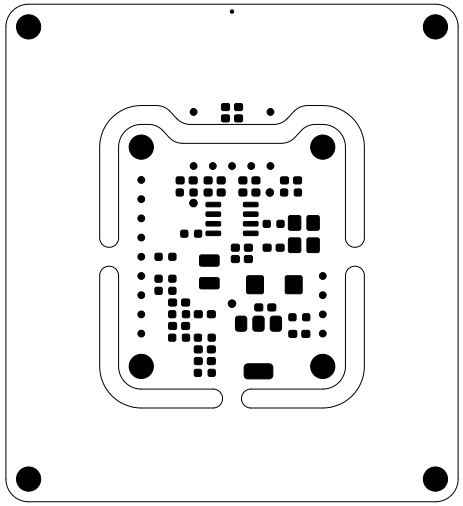

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 3/16

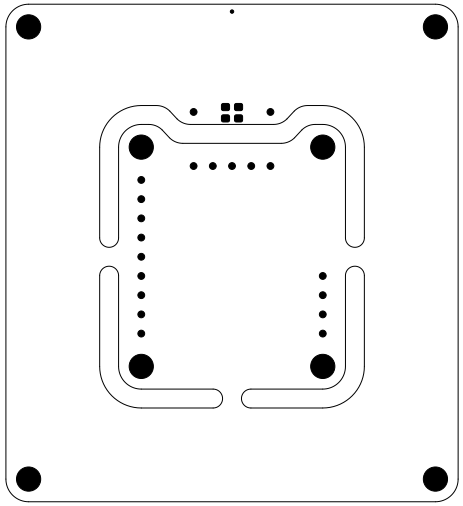

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 4/16

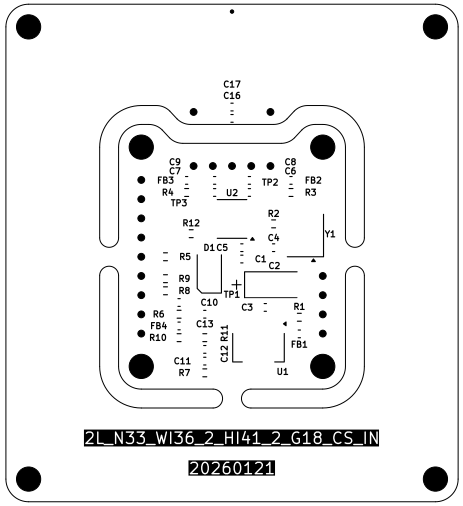

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 5/16

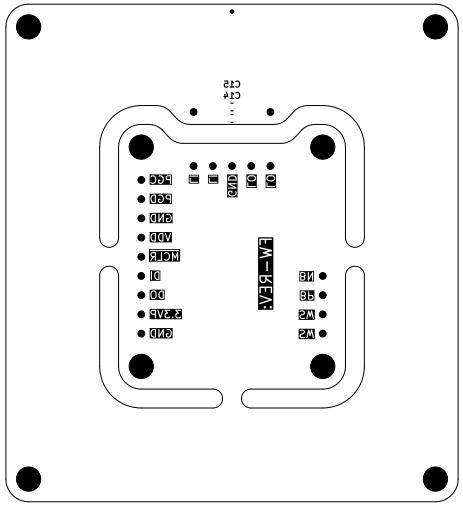

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 6/16

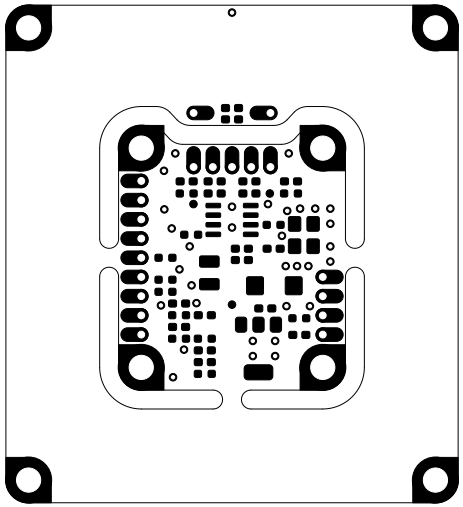

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 7/16

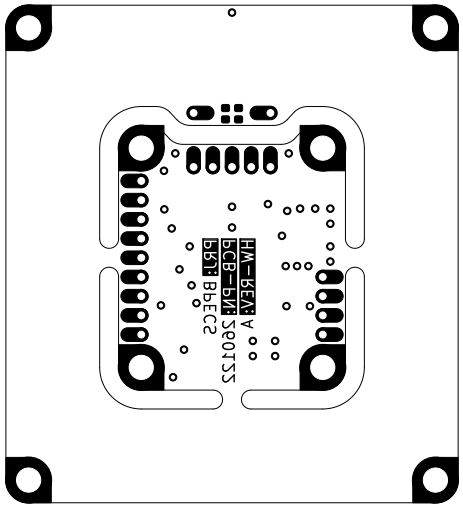

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 8/16

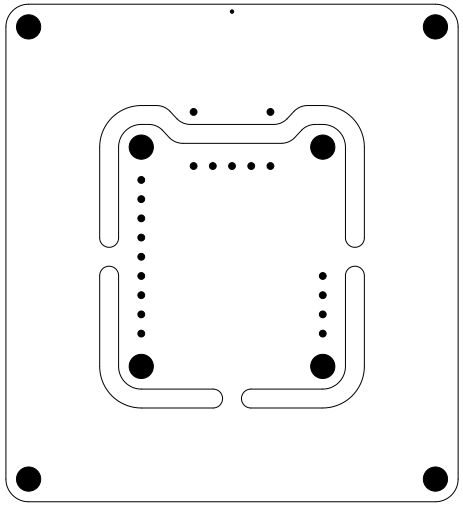

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 9/16

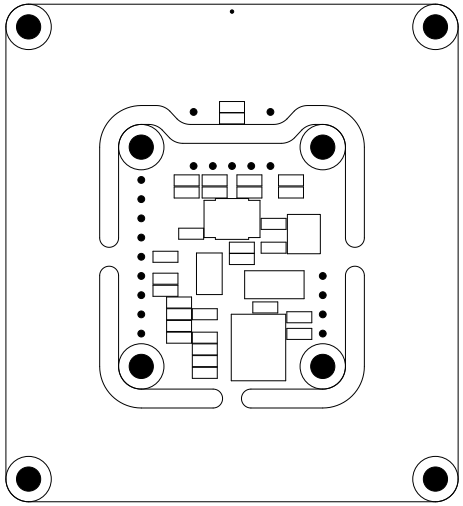

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 10/16

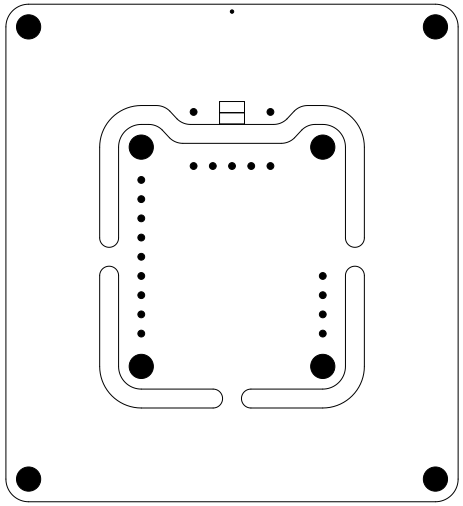

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 11/16

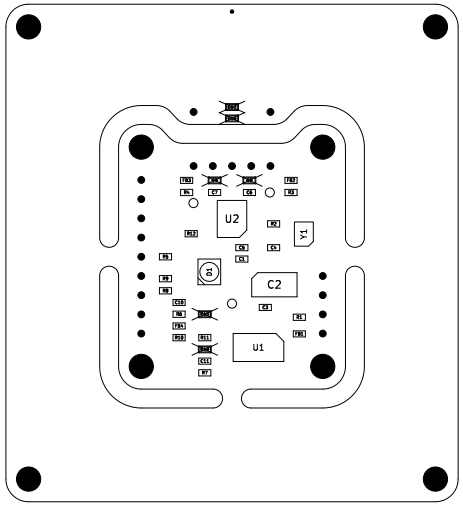

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 12/16

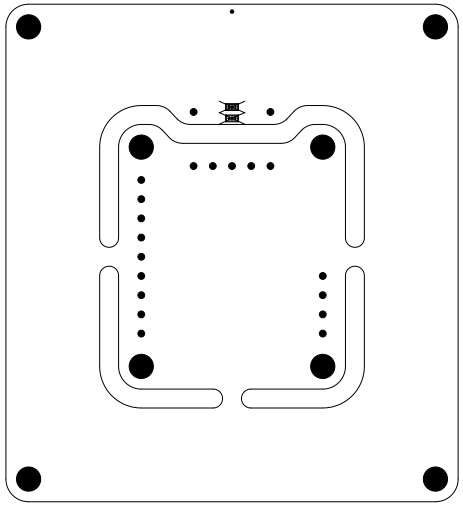

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 13/16

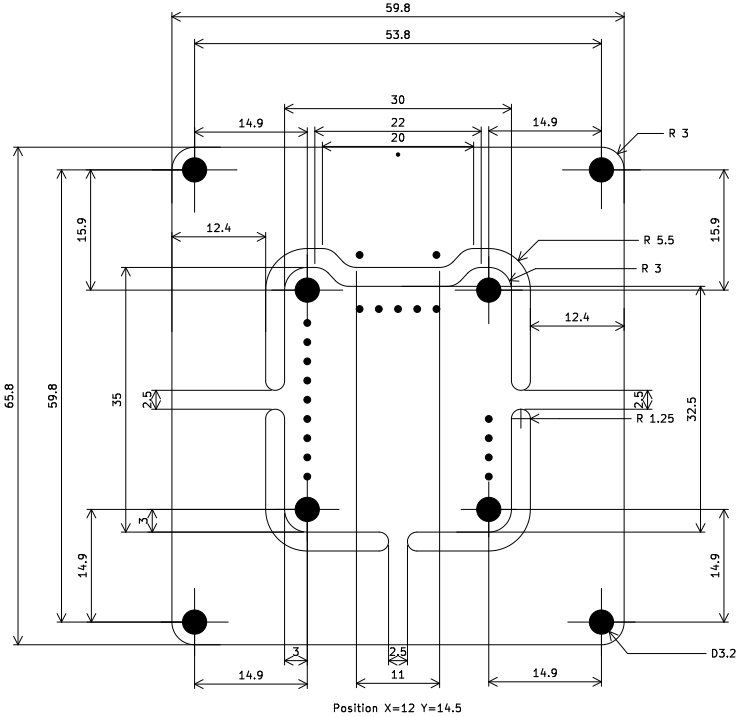

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 14/16

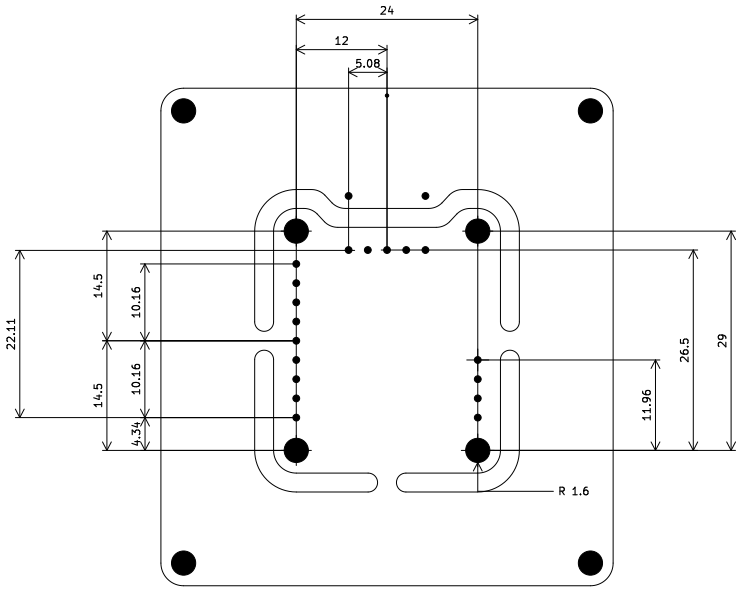

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 15/16

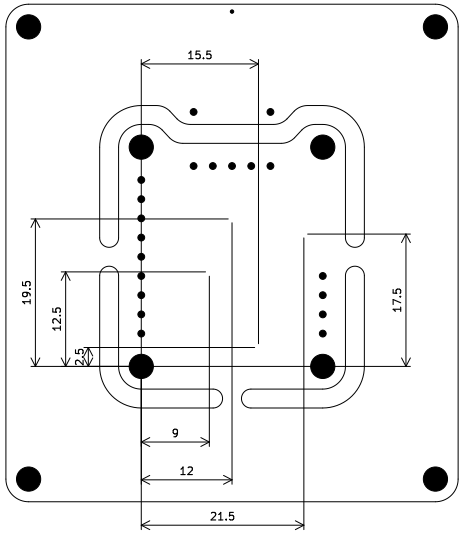

BOARD CHARACTERISTICS

Copper Layer Count:	2	Board Thickness:	1.5790 mm
Board overall dimensions:	59.8000 mm x 65.8000 mm		
Min track/spacing:	0.2000 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper Finish:	HAL lead-free	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.459 mm	FR4 natural	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_A.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-01-22	**Rev: A**
KiCad E.D.A. 9.0.4		Id: 16/16