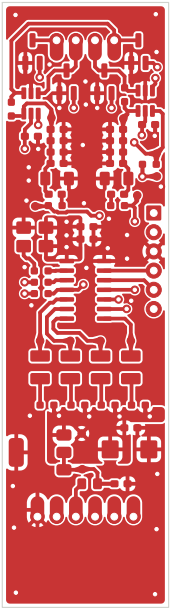

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	Rev: B
KiCad E.D.A. 10.0.0-rc1.1		Id: 1/15

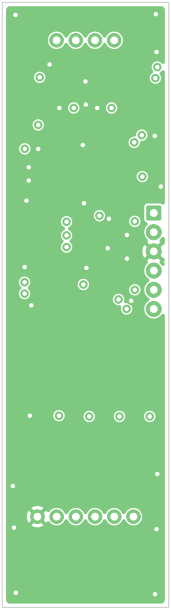

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	**Rev: B**
KiCad E.D.A. 10.0.0-rc1.1		Id: 2/15

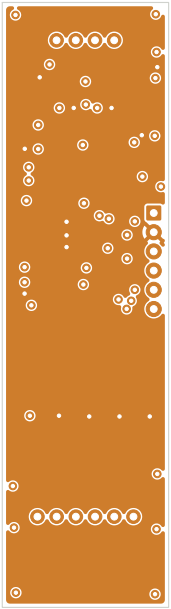

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	**Rev: B**
KiCad E.D.A. 10.0.0-rc1.1		Id: 3/15

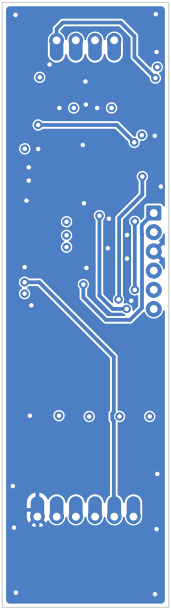

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	Rev: B
KiCad E.D.A. 10.0.0-rc1.1		Id: 4/15

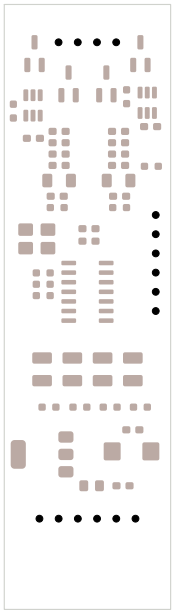

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	Rev: B
KiCad E.D.A. 10.0.0-rc1.1		Id: 5/15

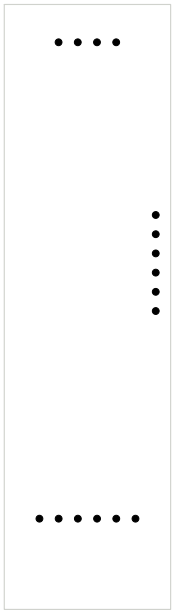

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	**Rev: B**
KiCad E.D.A. 10.0.0-rc1.1		Id: 6/15

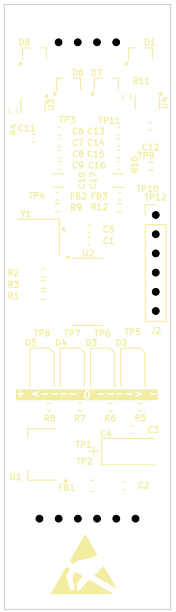

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	Rev: B
KiCad E.D.A. 10.0.0-rc1.1		Id: 7/15

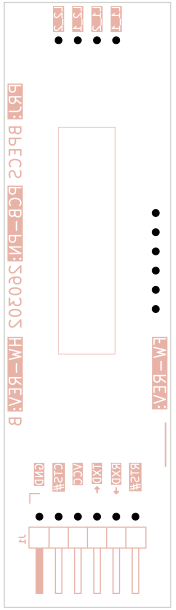

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	Rev: B
KiCad E.D.A. 10.0.0-rc1.1		Id: 8/15

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	**Rev: B**
KiCad E.D.A. 10.0.0-rc1.1		Id: 9/15

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	**Rev: B**
KiCad E.D.A. 10.0.0-rc1.1		Id: 10/15

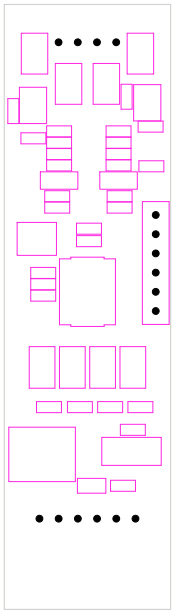

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	Rev: B
KiCad E.D.A. 10.0.0-rc1.1		Id: 11/15

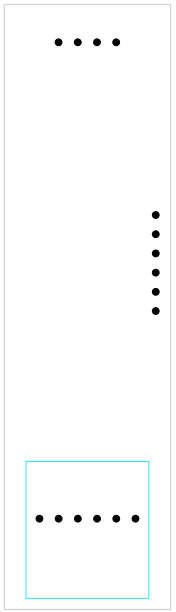

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	**Rev: B**
KiCad E.D.A. 10.0.0-rc1.1		Id: 12/15

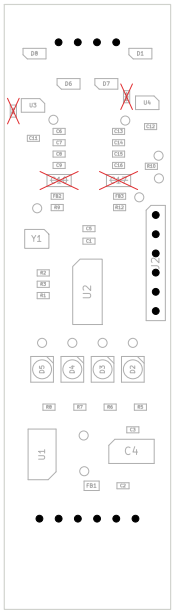

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	**Rev: B**
KiCad E.D.A. 10.0.0-rc1.1		Id: 13/15

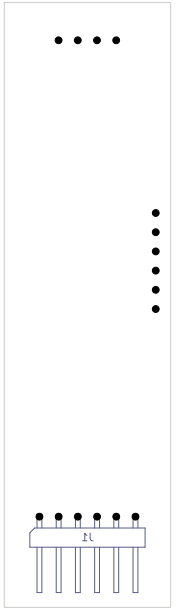

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	**Rev: B**
KiCad E.D.A. 10.0.0-rc1.1		Id: 14/15

BOARD CHARACTERISTICS

Copper Layer Count:	4	Board Thickness:	1.5790 mm
Board overall dimensions:	22.0000 mm x 80.0000 mm		
Min track/spacing:	0.1250 mm / 0.1250 mm	Min hole diameter:	0.2500 mm
Copper Finish:	ENIG	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

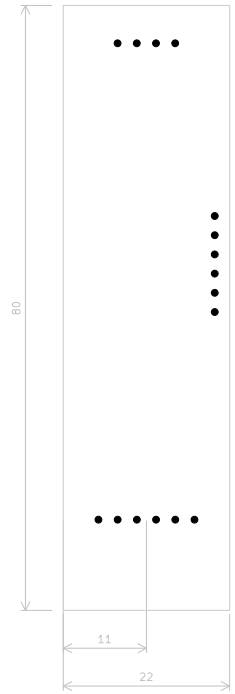

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Peters SD2692	0 mm	White	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
In1.Cu	copper		0.035 mm		1	0
Dielectric	core	Panasonic R-1566(W)	1.113 mm	FR4 natural	4.6	0
In2.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	Pansonic R-1551(W)	0.138 mm	FR4 natural	4.3	0
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Elpemer AS 2467 SM-DG	0.025 mm	Green	3.7	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Peters SD2692	0 mm	White	1	0

Sheet:
File: battery_powered_eddy_current_sensor_rev_B.kicad_pcb

Title: BPECS

Size: A4	Date: 2026-03-03	**Rev: B**
KiCad E.D.A. 10.0.0-rc1.1		Id: 15/15