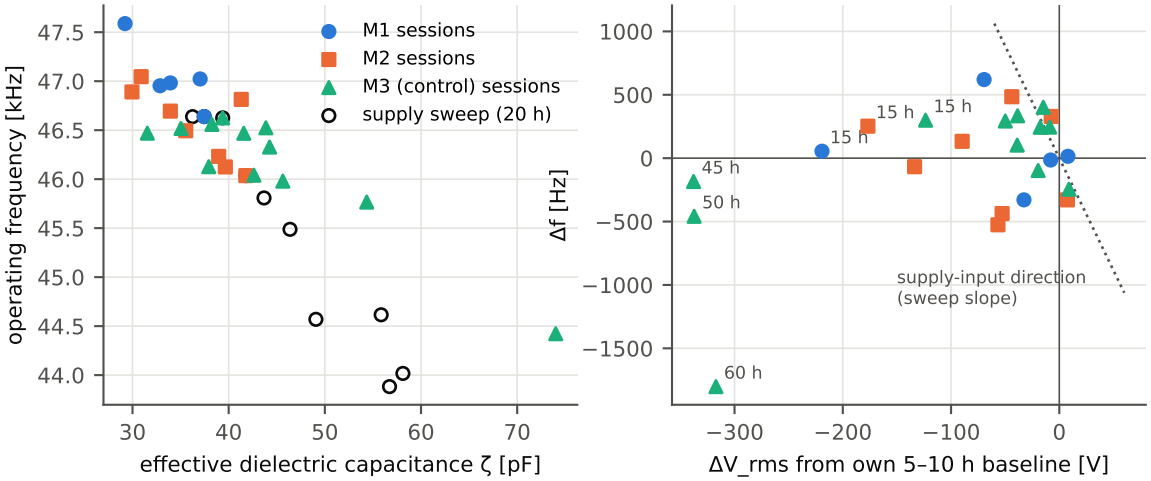
(a) the supply frequency follows the load
operating frequency [kHz]
effective dielectric capacitance ζ [pF]
M1 sessions
M2 sessions
M3 (control) sessions
supply sweep (20 h)
(b) session changes in the (V, f) plane
Δf [Hz]
ΔV_rms from own 5–10 h baseline [V]
15 h
15 h
15 h
45 h
50 h
60 h
supply-input direction
(sweep slope)