



□ RCS (dBsm vs Frequency)

- 12-inch sphere as reference file and 0-35 Degree as Measurement file

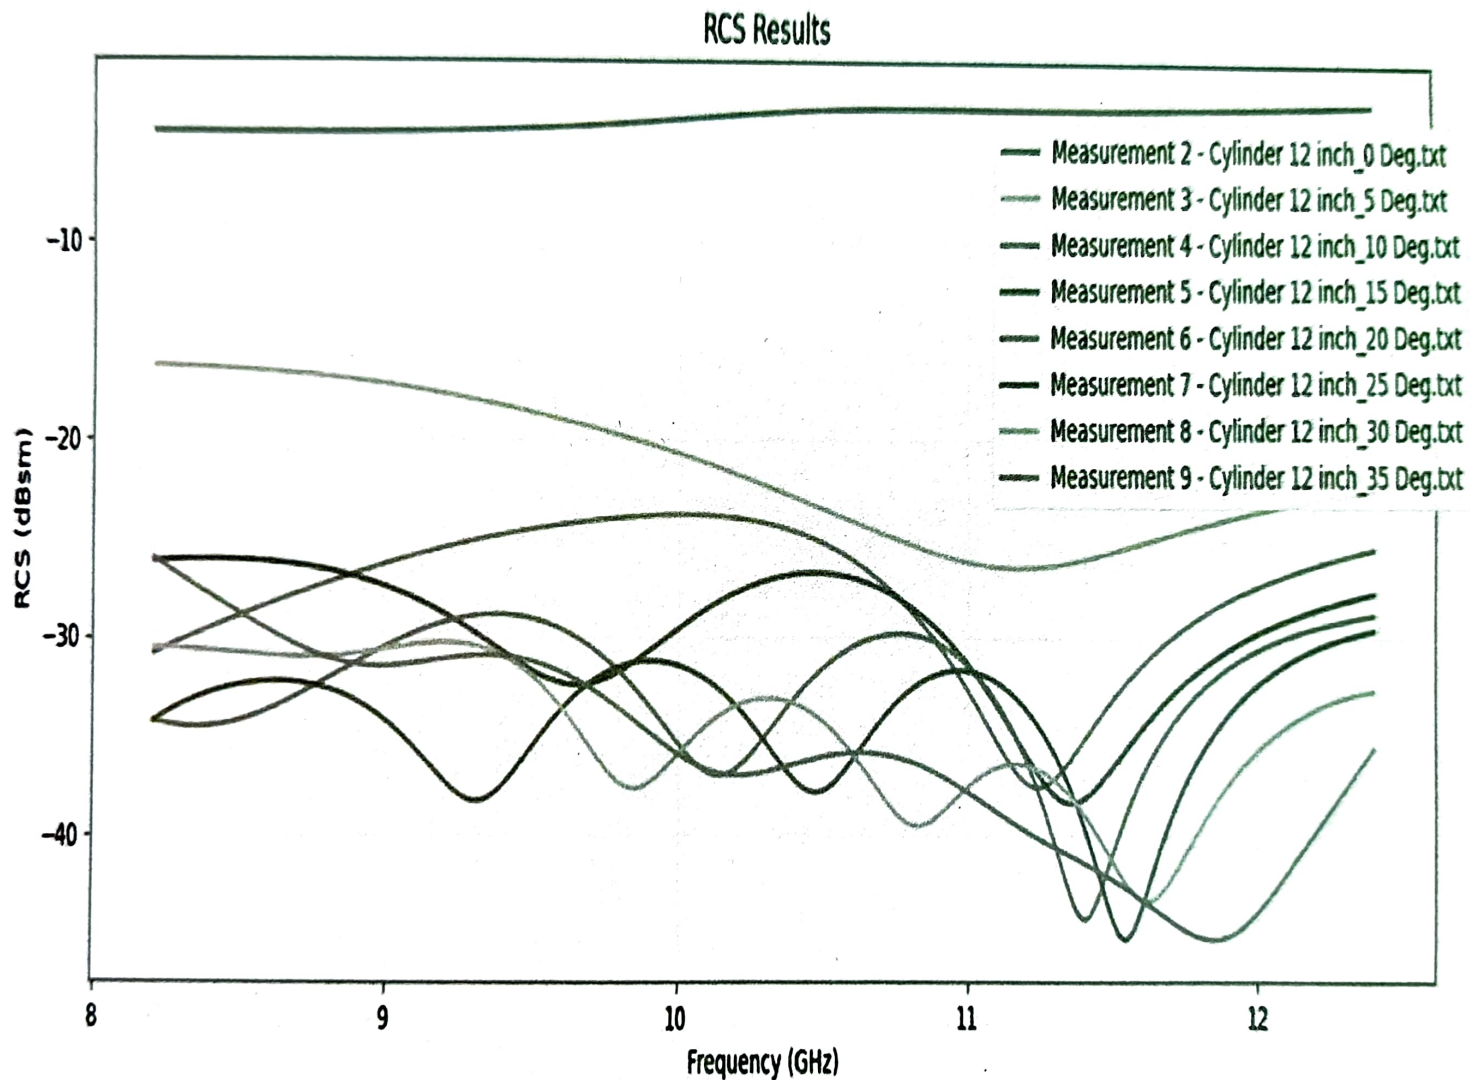

RCSR


- Reference Patch 70x70 mm vs Patch with Meta surface 70x70 mm

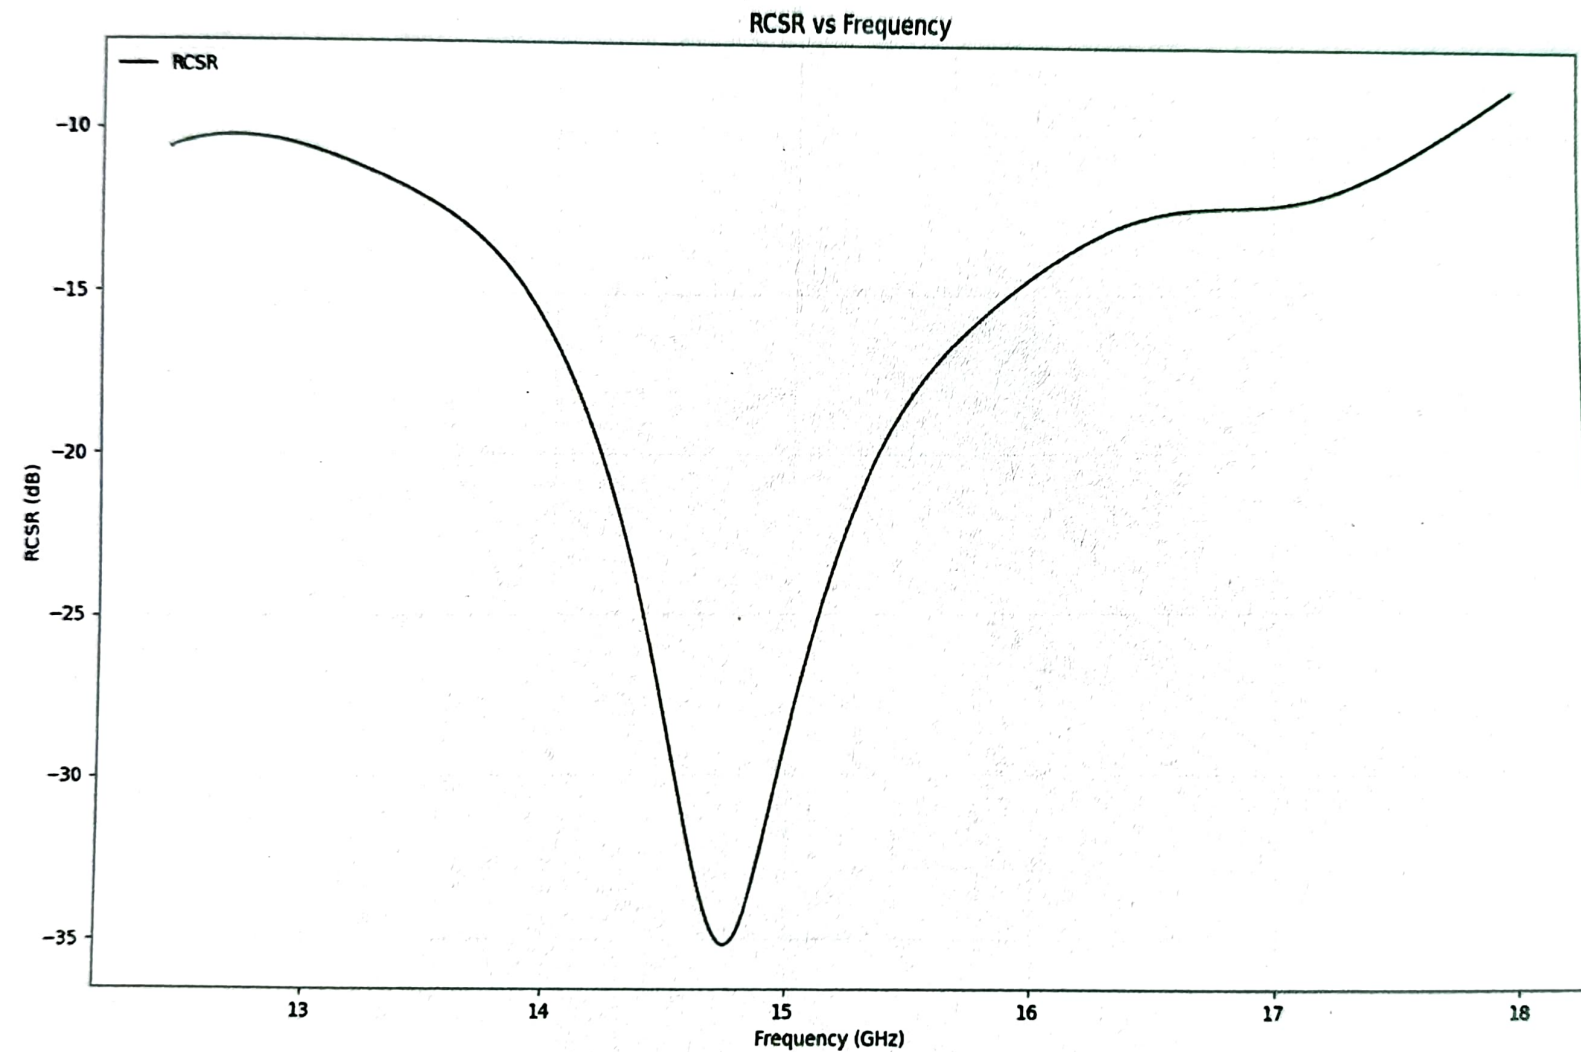

RCS (dBsm vs Angle)

- 12-inch Reference file
vs 0-60 Degree
Measurement file

RCS vs Angle at 8.205 GHz

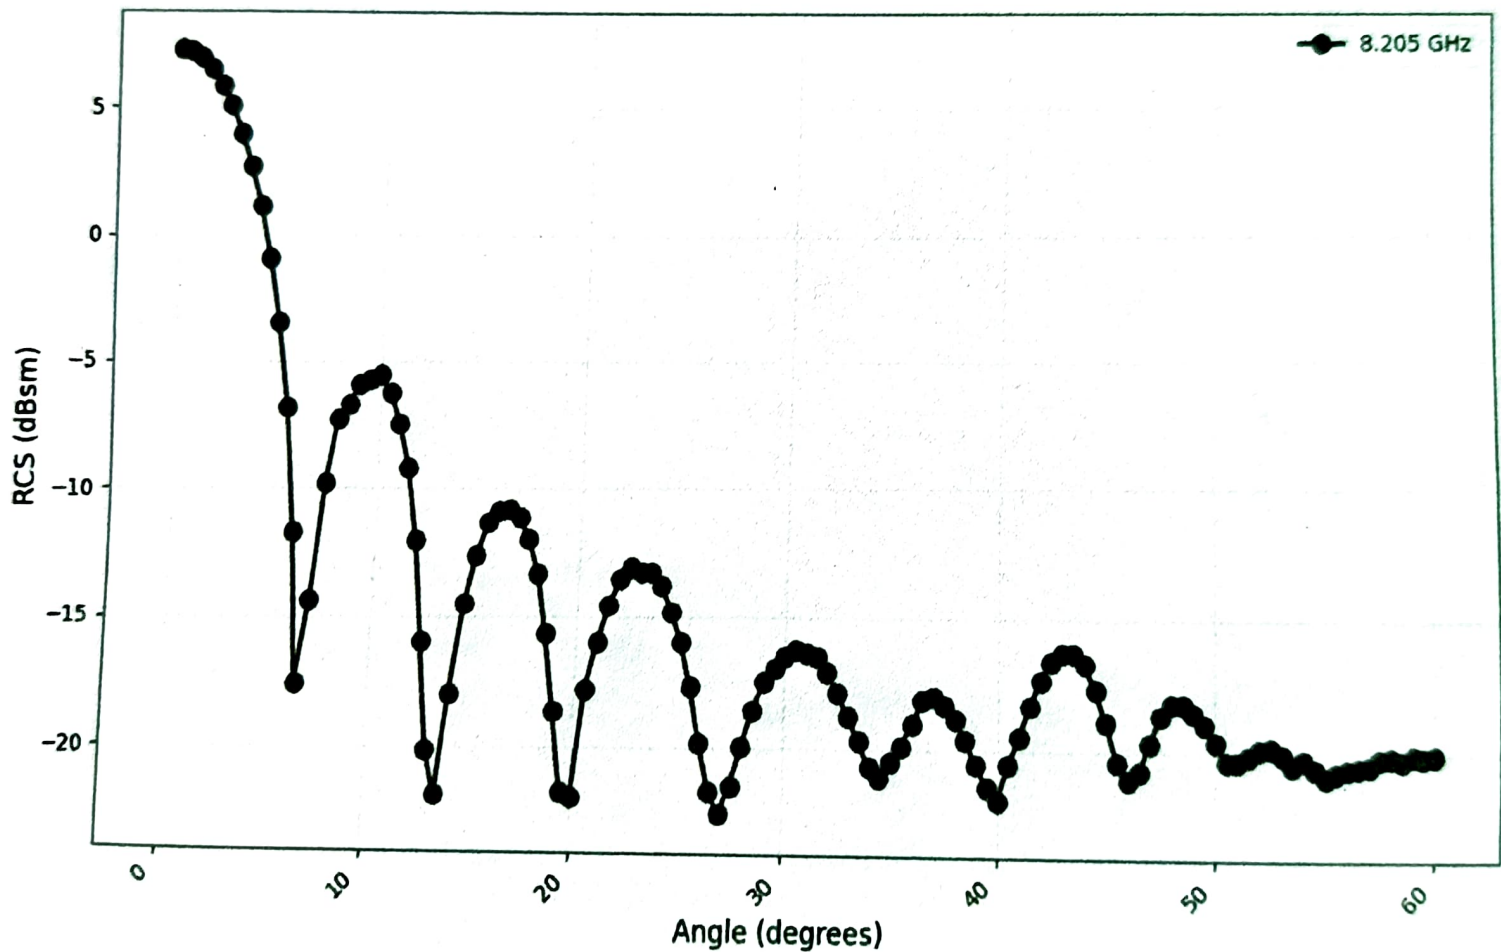

□ RCS (dBsm vs Frequency)

● 12-inch vs 8-inch

	Frequency (GHz)	Correction Factor	RCS (dBsm)
1	8.2000	67.7651	-14.8758
2	8.2052	67.7765	-14.8767
3	8.2105	67.7877	-14.8776
4	8.2157	67.7989	-14.8783
5	8.2210	67.8099	-14.8791
6	8.2263	67.8207	-14.8800
7	8.2315	67.8315	-14.8807
8	8.2368	67.8421	-14.8816
9	8.2420	67.8526	-14.8823
10	8.2472	67.8630	-14.8831
11	8.2525	67.8733	-14.8838
12	8.2577	67.8835	-14.8845
13	8.2630	67.8936	-14.8852
14	8.2683	67.9035	-14.8860
15	8.2735	67.9134	-14.8867
16	8.2788	67.9231	-14.8874
17	8.2840	67.9328	-14.8880
18	8.2892	67.9424	-14.8886
19	8.2945	67.9518	-14.8894
20	8.2997	67.9612	-14.8900
21	8.3050	67.9704	-14.8907