

HS402 DIY Oscilloscope Components List

PCB Version: 3.0 (provisional)





Designator	Quantity	Value	Description	Footprint	Comment	Photo
R1, R4, R5	3	1K	Resistor	0805		
R2, R6	2	910K	Resistor	0805		
R3, R7	2	100K	Resistor	0805		
R9	1	1K	Potentiometer	VR5		
C1, C5	2	20pF var	Adjustable Capacitor	Capacitor Var	3*4mm	
C2, C6	2	100nF	Capacitor	0805	use 1uF to improve AC bandwidth at lower frequencies (<100Hz)	
C3, C7	2	47pF	Capacitor	0805		
C4	1	1uF	Capacitor	0805	TBC	
C8	1	47uF - 6.3V	Capacitor	0805		
C9	1	470nF	Capacitor	0805		
C11	1	10uF	Capacitor	0805	TBC	
D1, D2	2	BAV99	Diodes	SOT23		
U1, U3	2	MCP6S21	PGA	SOP-8 or SOIC-8	MSOP-8 in V1.6	
U2	1	AMS1117-1.2	Linear Regulator	SOT223		
U5	1	AMS1117-3.3	Linear Regulator	SOT223	Option 2 (independent 3V3)	
U6	1	TPS73733	Linear Regulator	SOT223-6	Option 3 (independent 3V3, lower noise)	
L1	1	1uH	Inductor	0805	Option 3 TBC	
C10	1	10uF	Capacitor	0805	Option 3 TBC	
K1, K2	2	AQY210EH	PhotoMOS	PNSC-DIP4(SMT)_V		
MCU	1	STM32F411	STM32 Black Pill Dev. Board	Black Pill	(or STM32F401)	
P2, P5	2	BNC	BNC Elbow Connector	BNC		





WIFI Module (PCB Built)

Components List

PCB Version: 3.0 (provisional)

Designator	Quantity	Value	Description	Footprint	Comment	Photo
R10, R11, R12	3	5.1K	Resistor	0805		
R13, R14	2	20K	Resistor	0805		
R15, R16, R17	3	1K	Resistor	0805		
C20, C21, C22	3	1uF	Capacitor	0805	Testing	
C23, C24	1	10uF	Capacitor	0805	Testing	
C3, C7	2	47pF	Capacitor	0805		
L10	1	1uH	Inductor	0805		
S1	1	-	Button	1206 (or 3x4mm)		
LED	1	RGB LED 3528	Common anode	1210		
U10	1	ESP32-WROOM-32D	MCU	-	Older model is ok. New model ESP32-WROOM-32E not tested yet	
U11 (or U11-1)	1	AMS1117-3.3	Linear Regulator	SOT223 (or SOT89)	Option 1 (to use when power with 5V)	
U12	1	TPS73733	Linear Regulator	SOT223-6	Option 2 (to use when power directly with 3.7 Lithium battery)	
WIFI	1	Header 9	Header, 9-Pin	HDR1X9	Main connector	
SP	1	Header 2	Header, 2-Pin	HDR1X2	Serial connector (for flashing)	

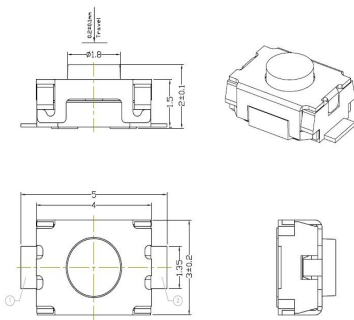




WIFI Module (no PCB) Components List

HS402 PCB Ver: 3.0

Notes: The Wifi module can be implemented easily without the custom PC just by using this ESP32 Development Board.

Designator	Quantity	Value	Comment	Photo
MCU	1	ESP32 Development Board 30-pins	Based of ESP32 WROOM 32D (dual core)	
LED	1	RGB LED Module	Optional, it could be common catode or anode	