

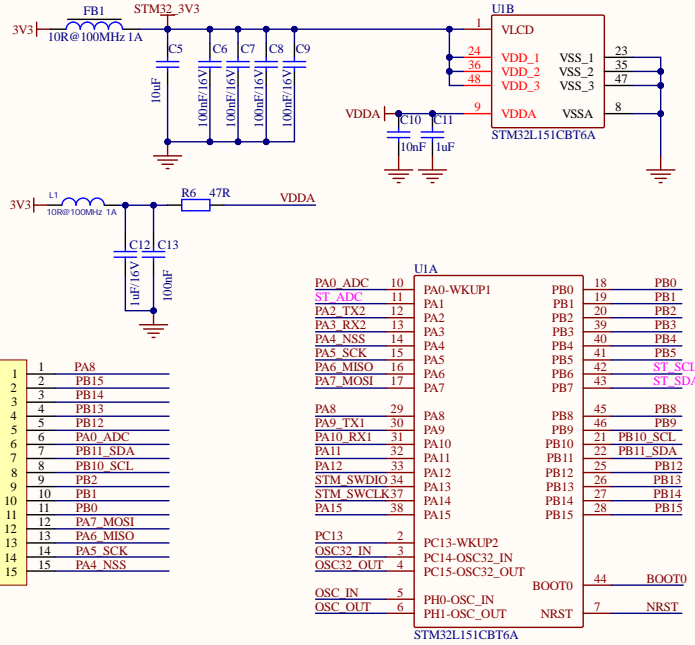





STM32 MCU


STM32 Debug



Temperature and humidity sensor


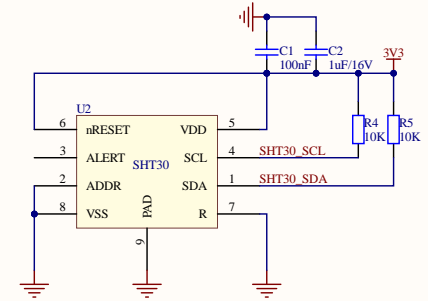


Button





LED


Battery

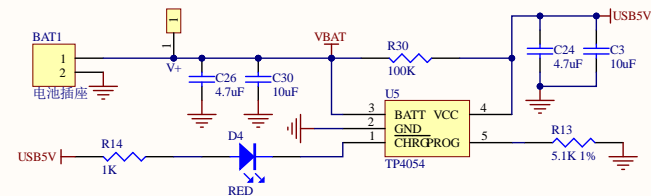


LDO

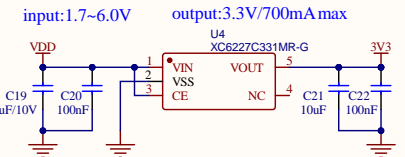

USB

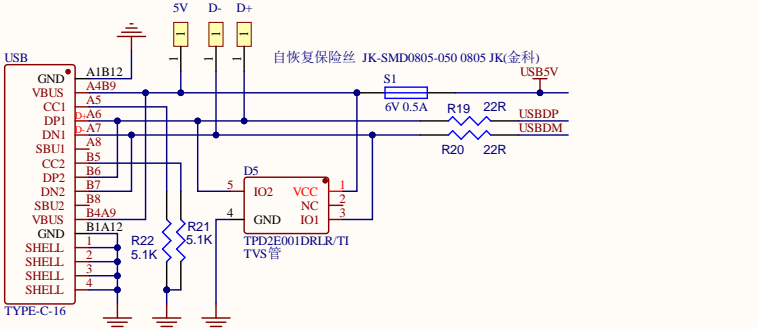


USB to TTL

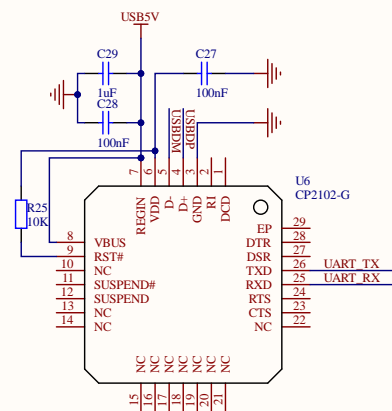


MOKO		Drawing by	LYH
Product Name		MKL110BC_EVK	
Schematic Name		MKL110BC_EVK_ST	
Revision	Ver1.0	Page	1/2
Auditing by		Date	20211110
		Authorize by	

Interface


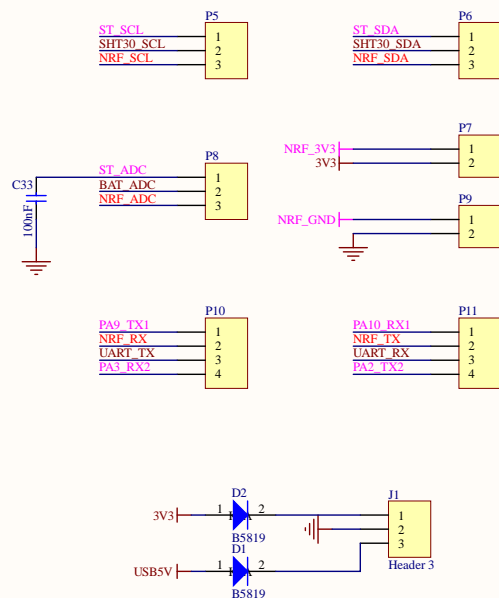


Extra Power Supply




LED

RF Module

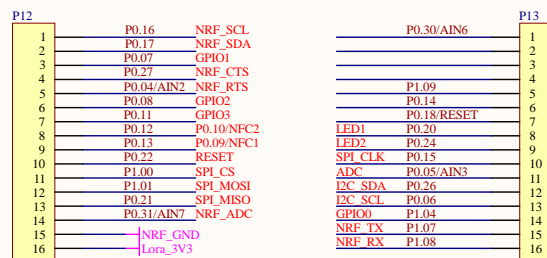

- 1, USB接口不引出, 放到模块转接板上
- 2, SWD烧录接口不引出, 放到模块转接板上
- 3, 射频天线接口不引出, 通过SMA端子放到模块转接板上

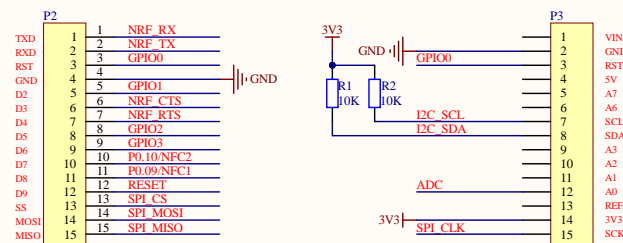

脚间距2.54mm, pin脚中心点间距15.24mm
Arduino nano 3.0接口 (红色标注)

MOKO		Drawing by	LYH
Product Name	MKL110BC_EVK		
Schematic Name	MKL110BC_EVK_NRF		
Revision	Ver1.0	Page	1/2
Auditing by	Date		
		20211110	
		Authorize by	