




Quantile plot for 56 benchmarks: ePMC(21/56), mcsta(40/56),
Storm-static(44/56).Default configuration.

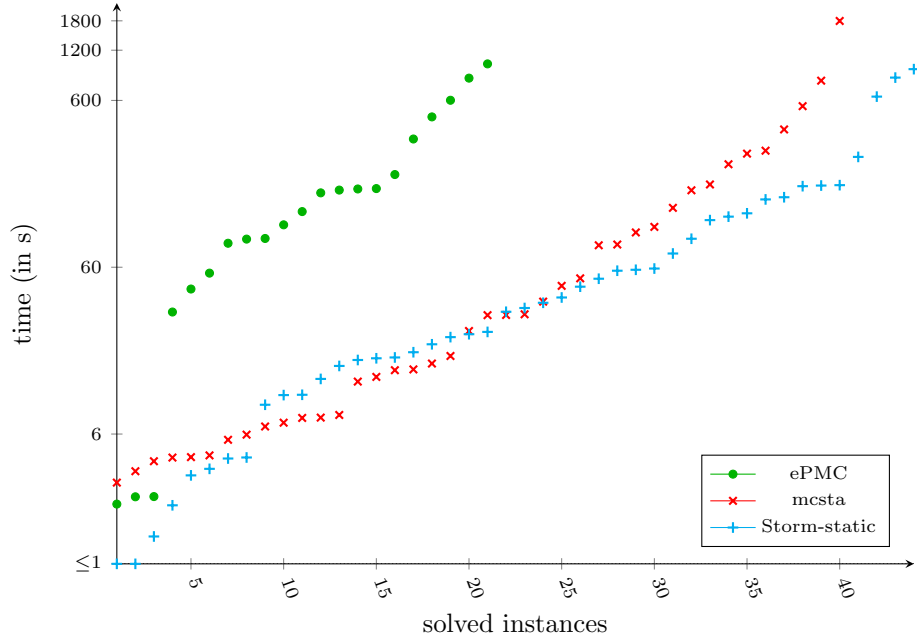


Quantile plot for 56 benchmarks: ePMC(21/56), mcsta(41/56),
Storm-static(51/56).Specific configuration.

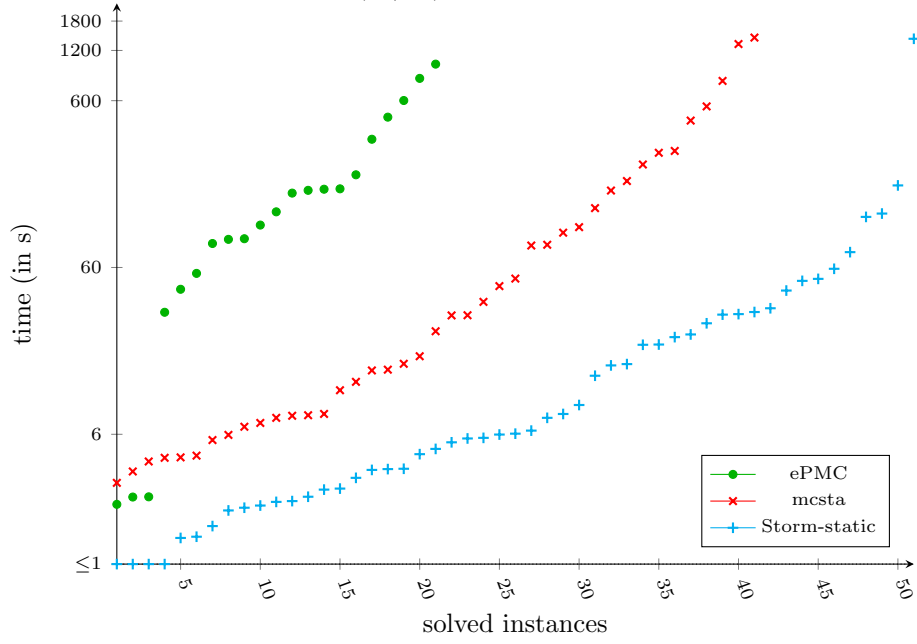


Quantile plot for 41 benchmarks: ePMC(18/41), mcsta(30/41),
Storm-static(36/41), PRISM(38/41).Default configuration.

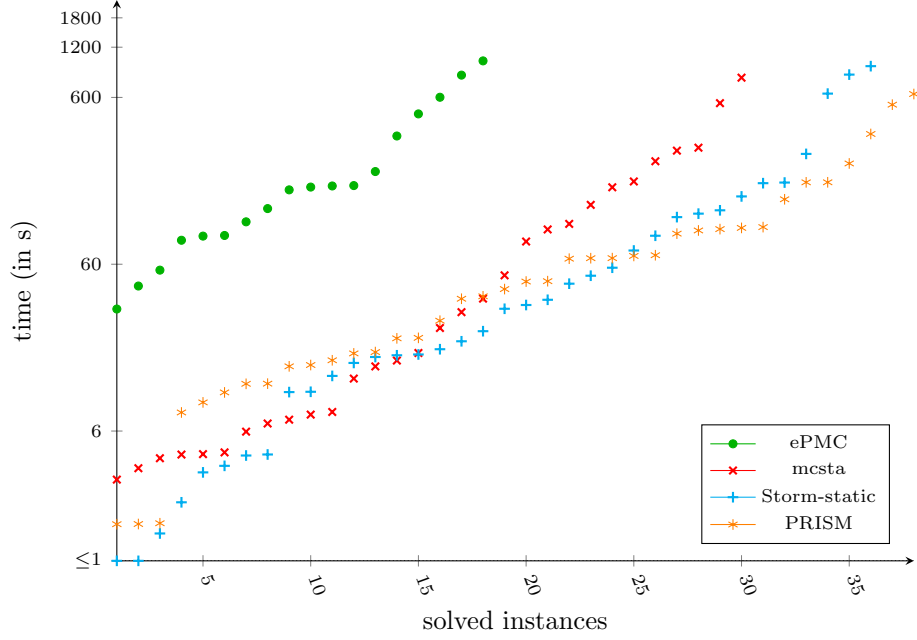


Quantile plot for 41 benchmarks: ePMC(18/41), mcsta(31/41),
Storm-static(41/41), PRISM(39/41).Specific configuration.


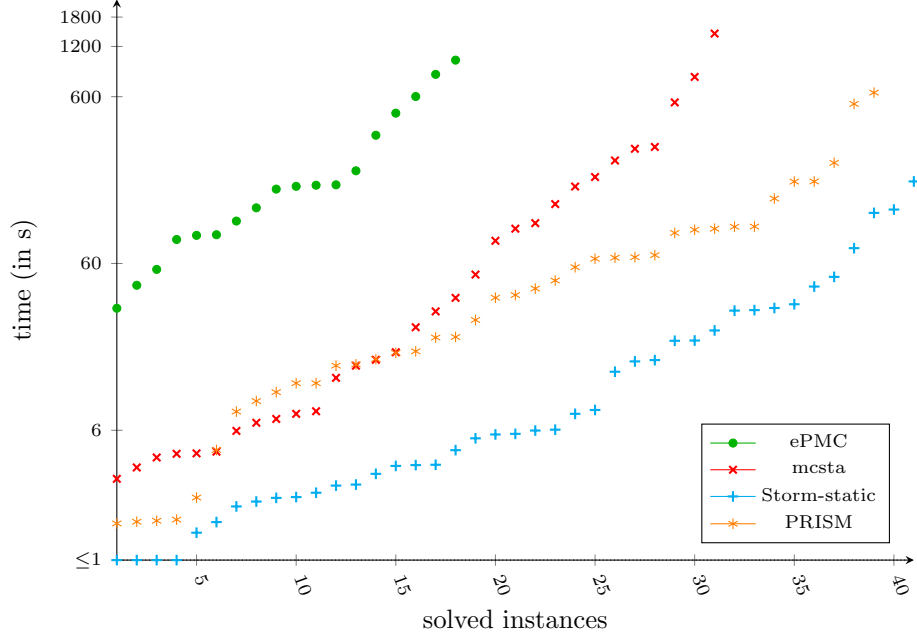


Quantile plot for 100 benchmarks: Storm(86/96), Storm-static(77/96),
PRISM(54/58), mcsta(62/88), PRISM-TUM(9/24), modes(19/32),
STAMINA(1/3), DFTRES(5/12), ModestFRETpiLRTDP(11/31),
ePMC(22/61), ePMC-6(31/61).Default configuration.

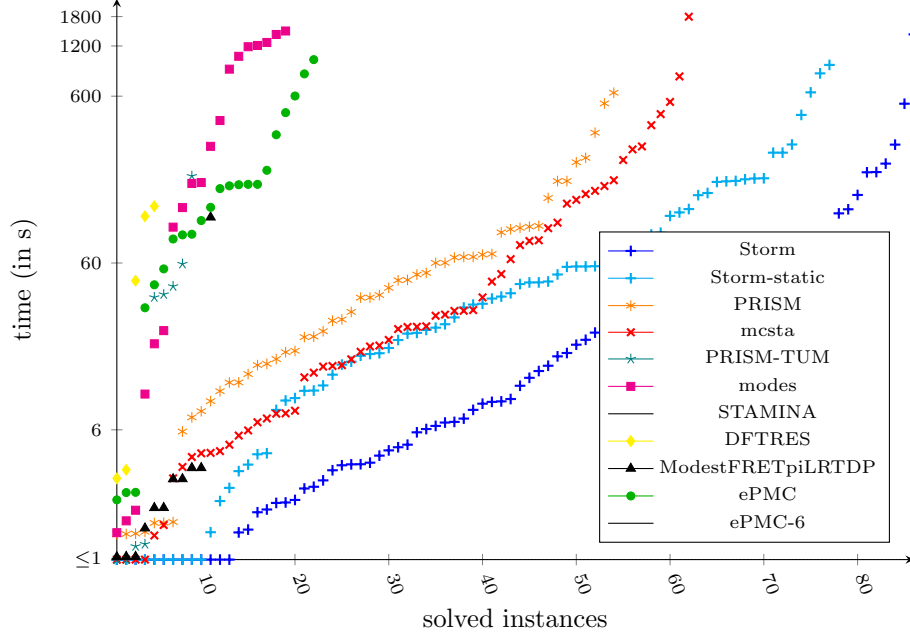


Quantile plot for 100 benchmarks: Storm(86/96), Storm-static(86/96),
PRISM(56/58), mcsta(63/88), PRISM-TUM(6/24), modes(19/32),
STAMINA(1/3), DFTRES(6/12), ModestFRETpiLRTDP(11/31),
ePMC(22/61), ePMC-6(31/61).Specific configuration.

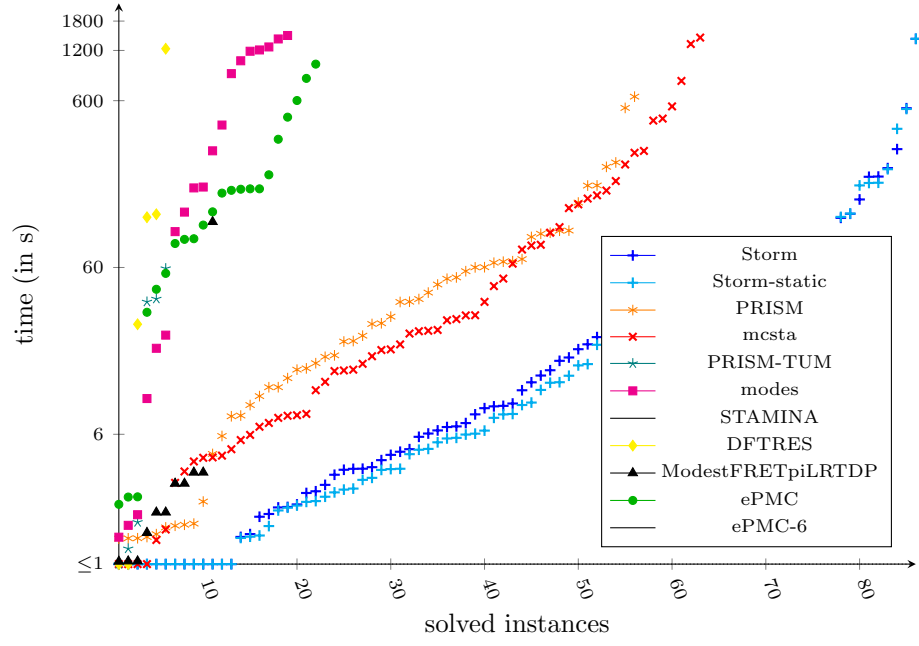


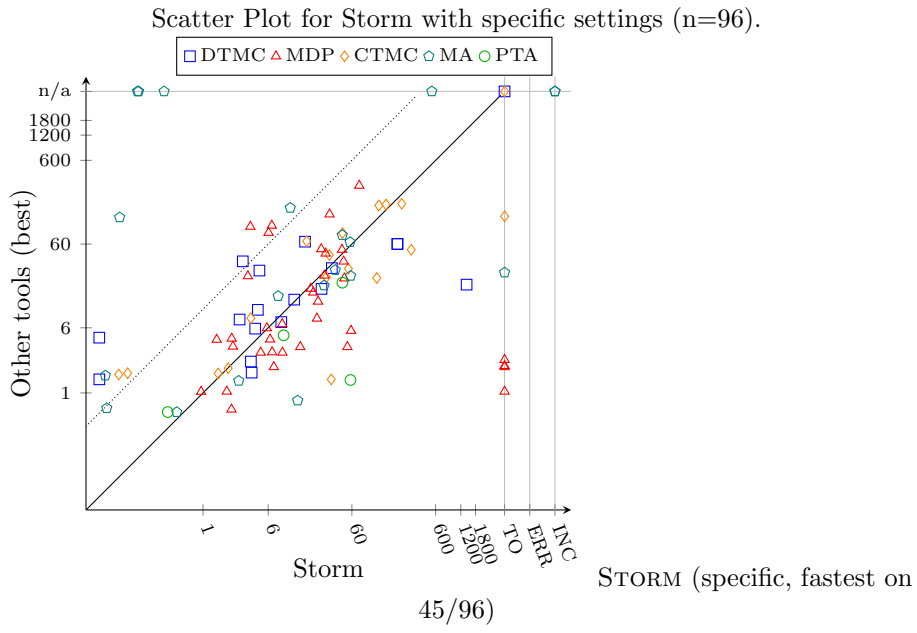
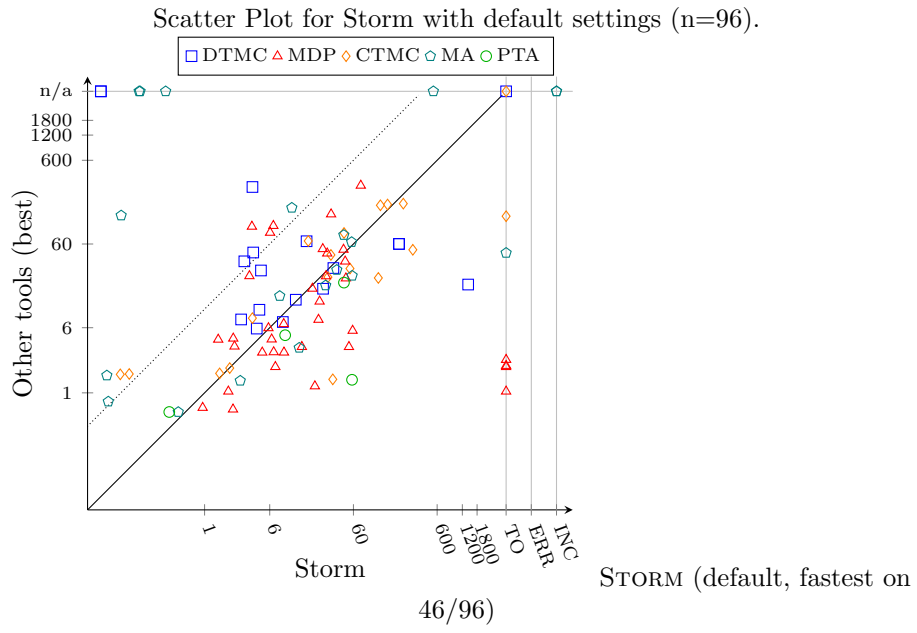


Scatter Plot for Storm-static with default settings (n=96).

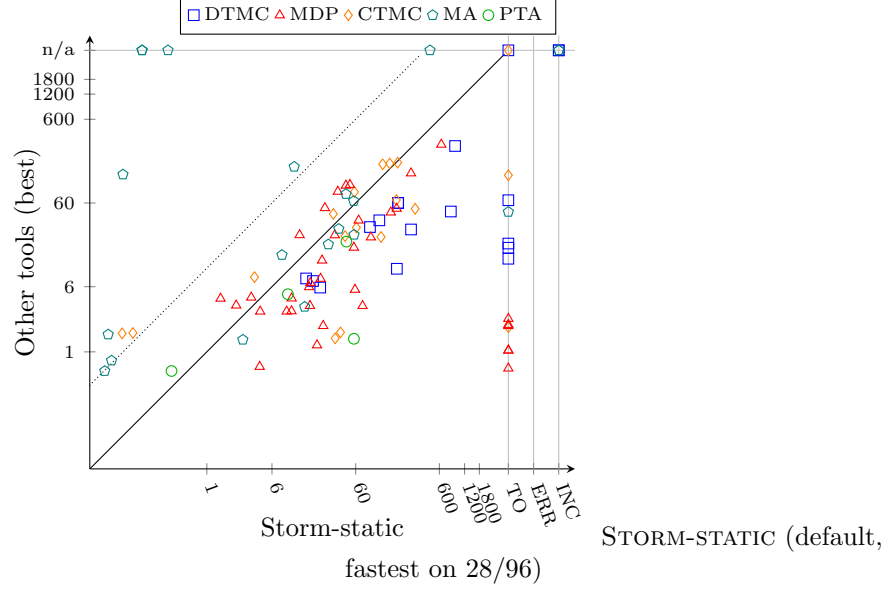


Scatter Plot for Storm-static with specific settings (n=96).

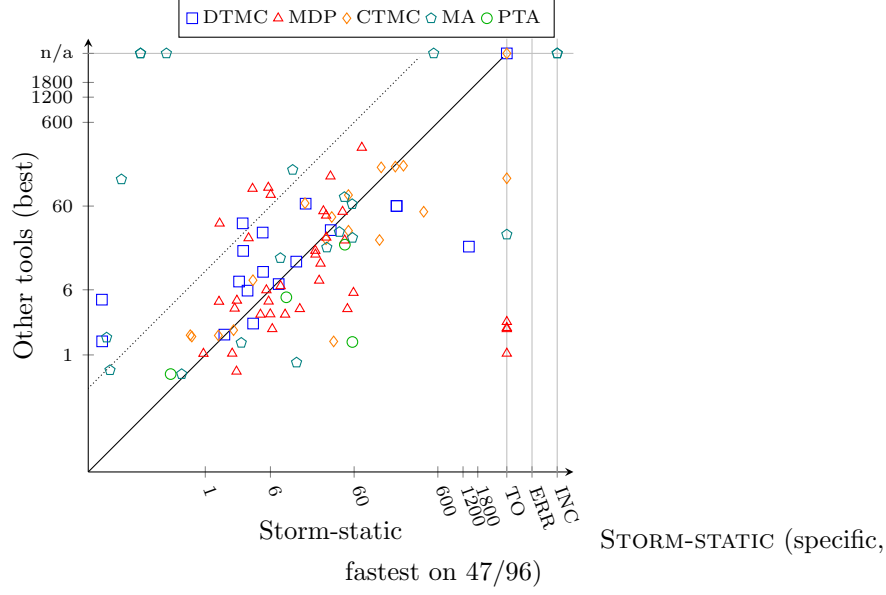


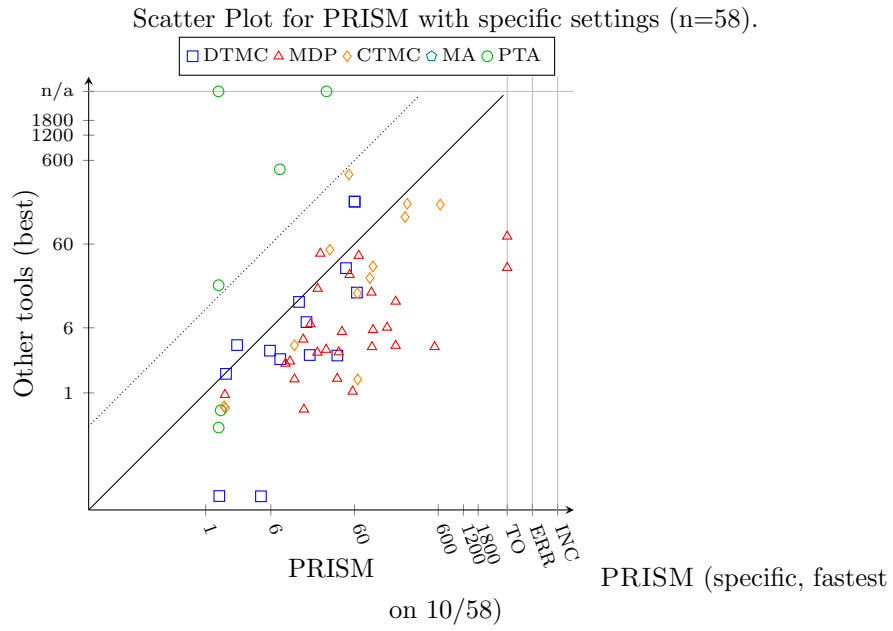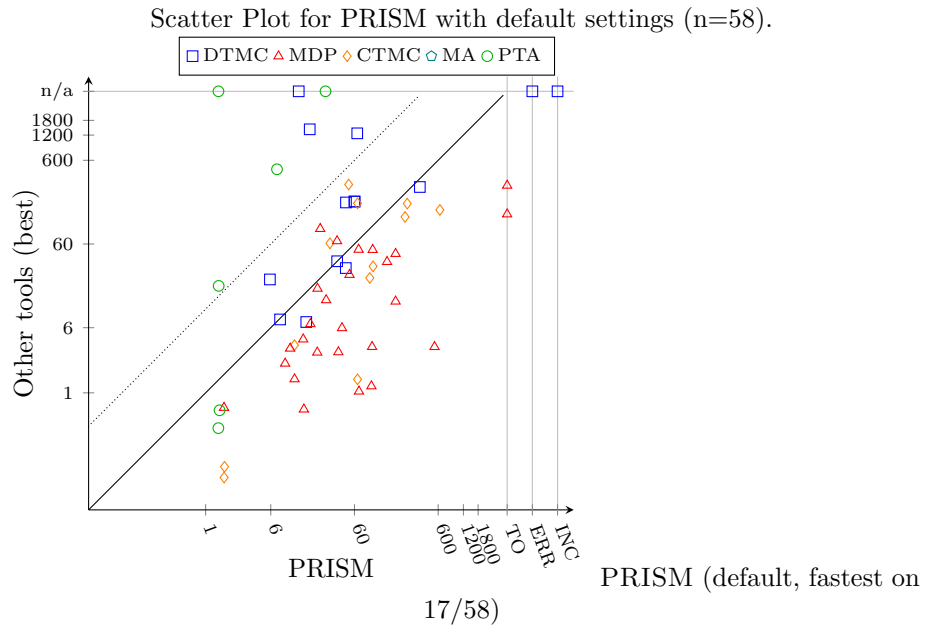


Scatter Plot for mcsta with default settings (n=88).

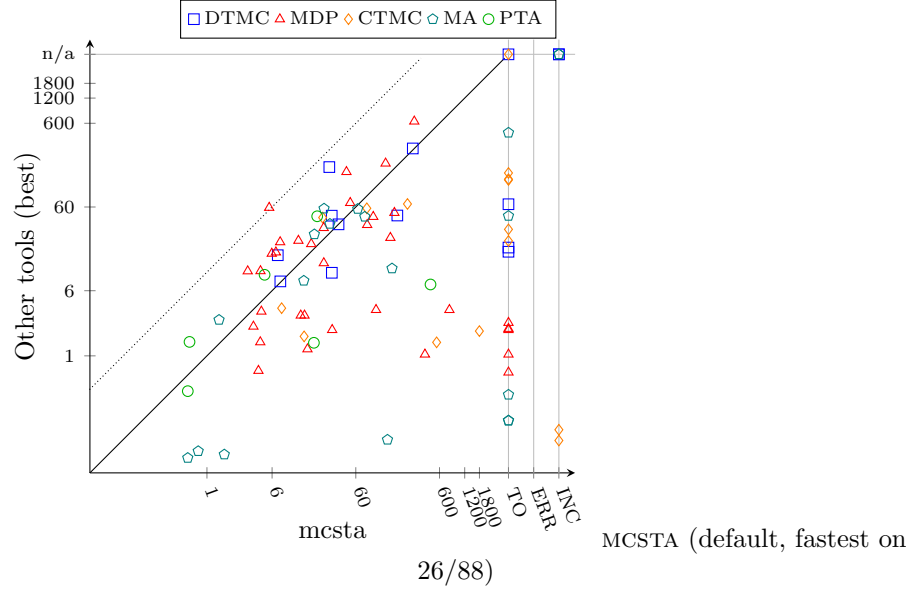


Scatter Plot for mcsta with specific settings (n=88).


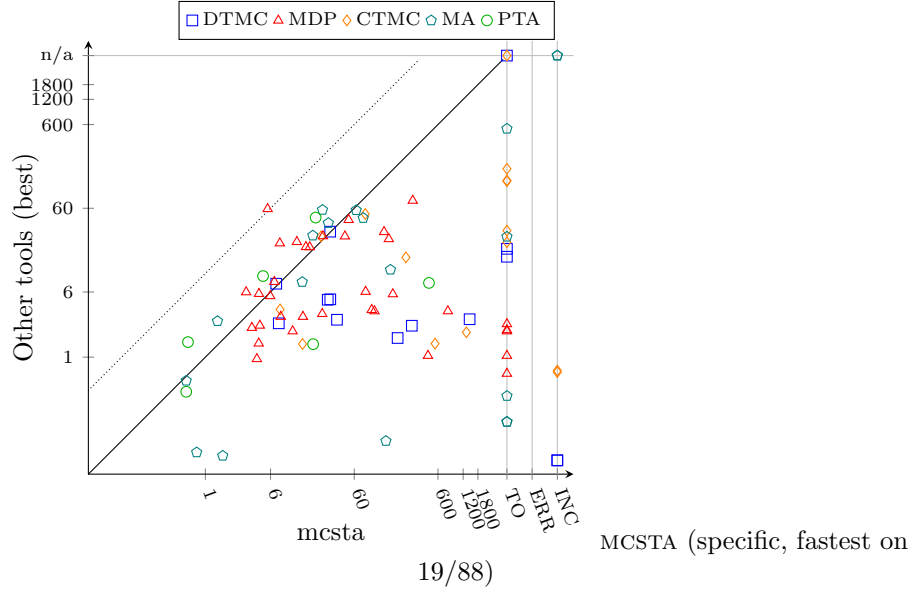


Scatter Plot for PRISM-TUM with default settings (n=24).

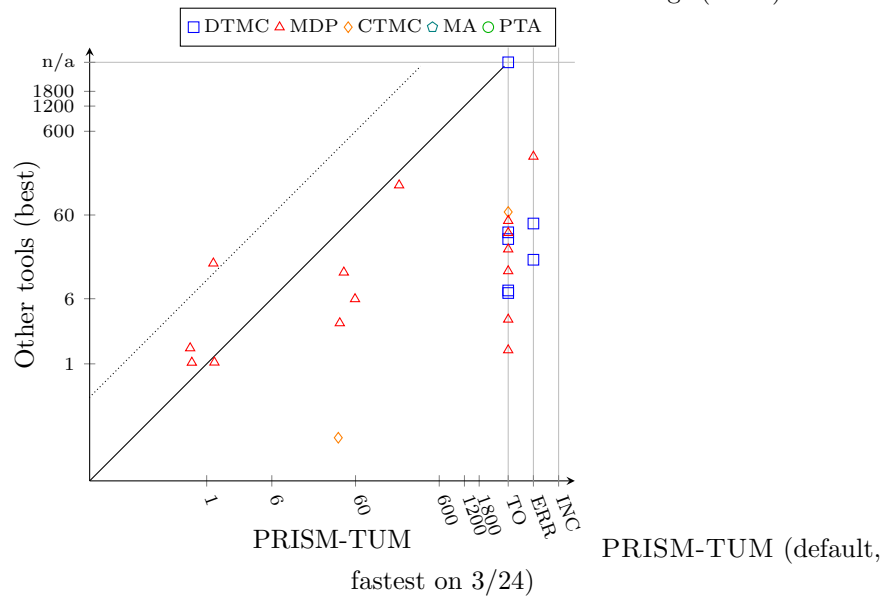


Scatter Plot for PRISM-TUM with specific settings (n=24).

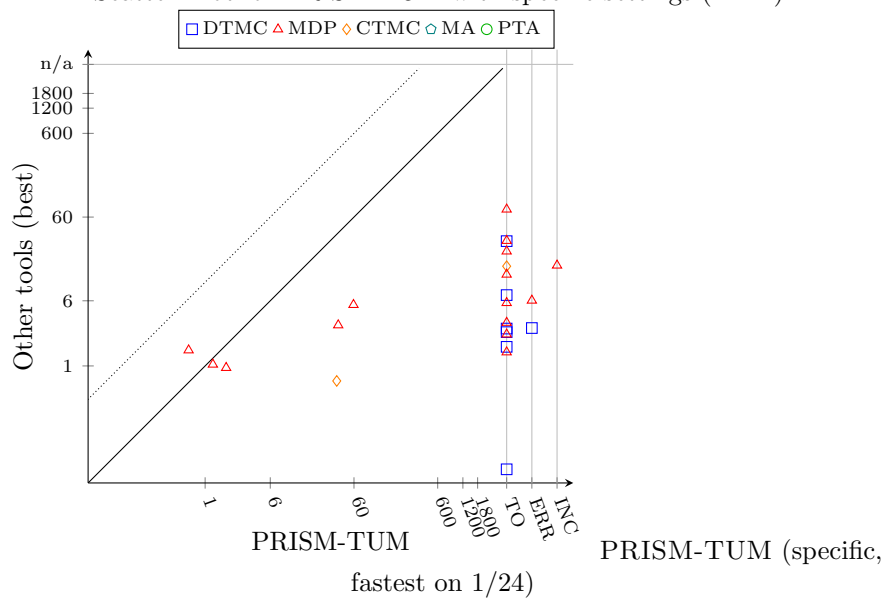


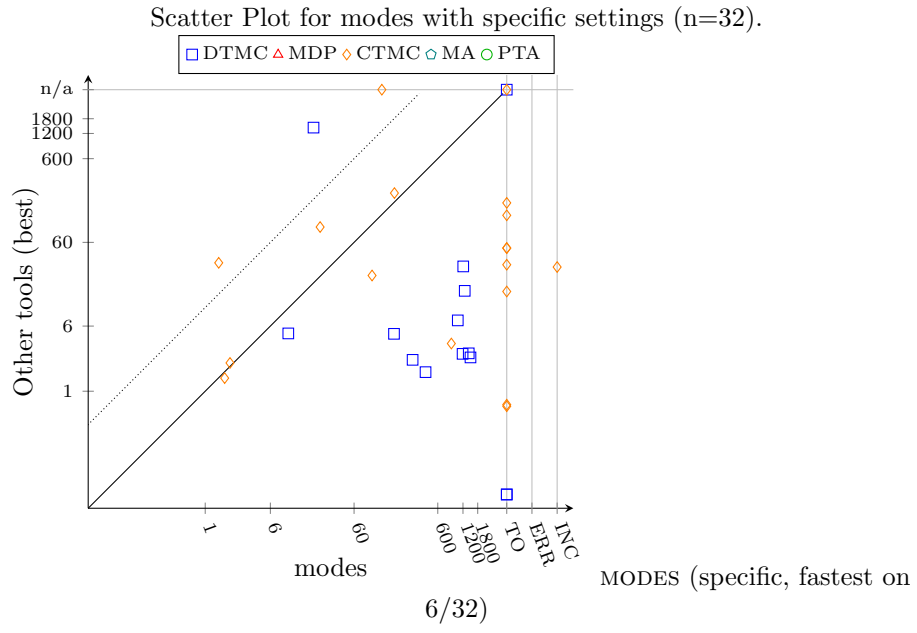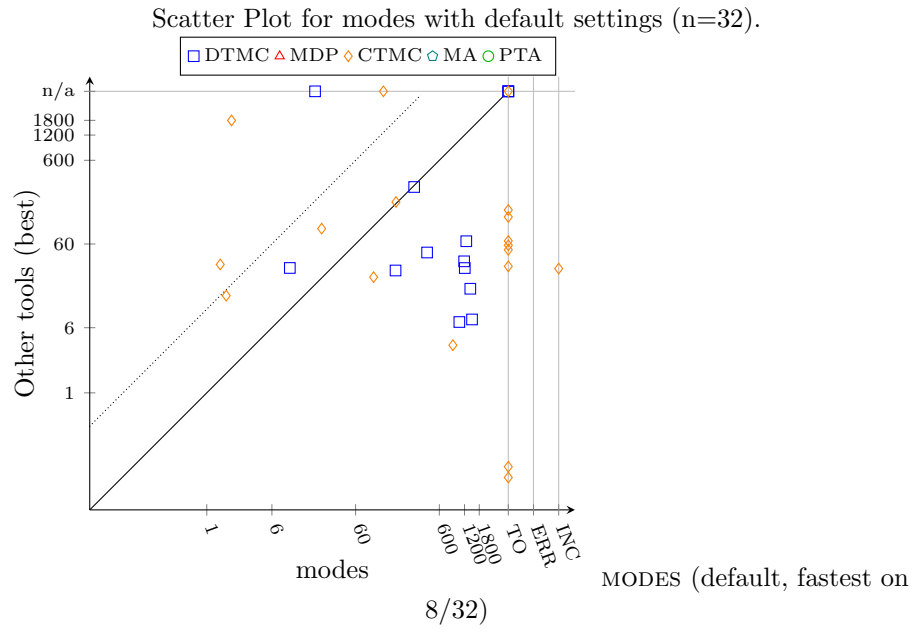


Scatter Plot for STAMINA with default settings (n=3).

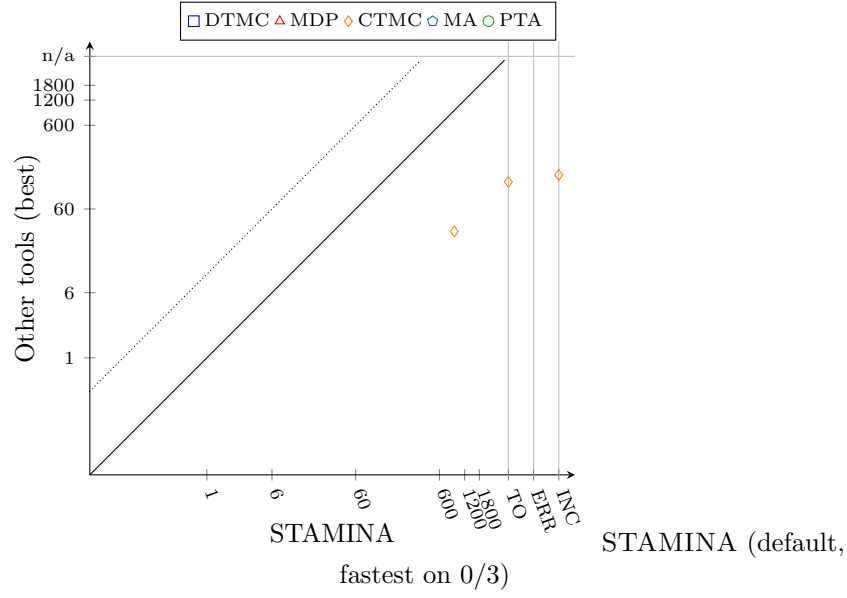


Scatter Plot for STAMINA with specific settings (n=3).

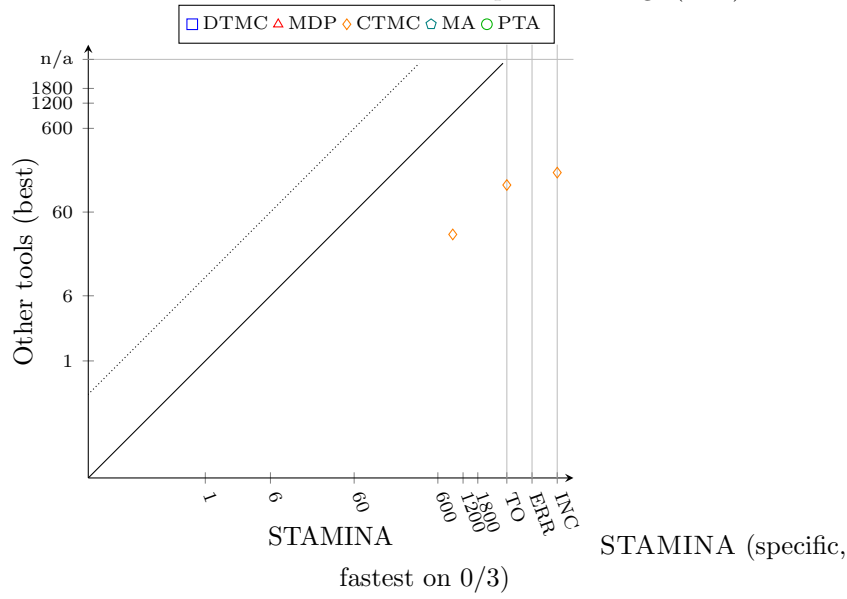


Scatter Plot for DFTRES with default settings (n=12).

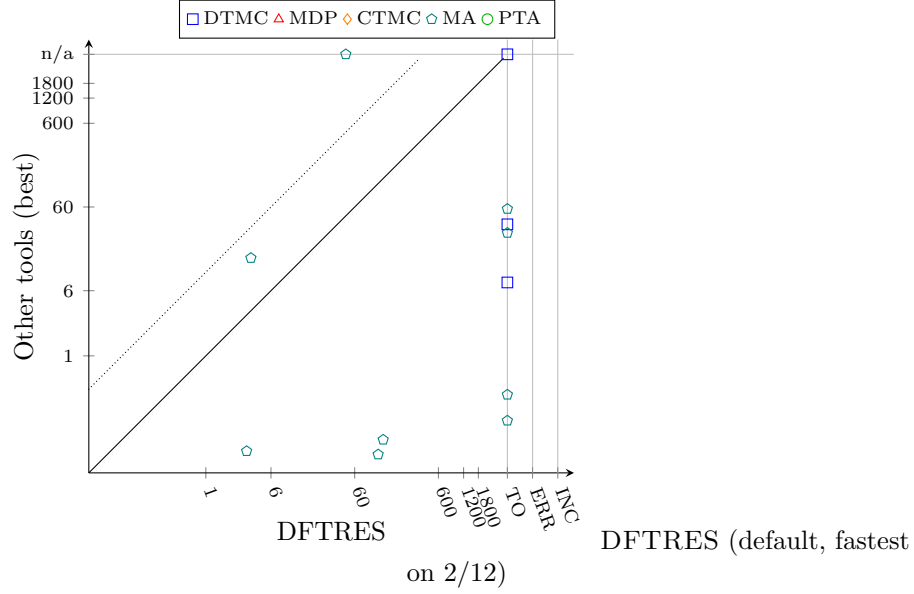


Scatter Plot for DFTRES with specific settings (n=12).

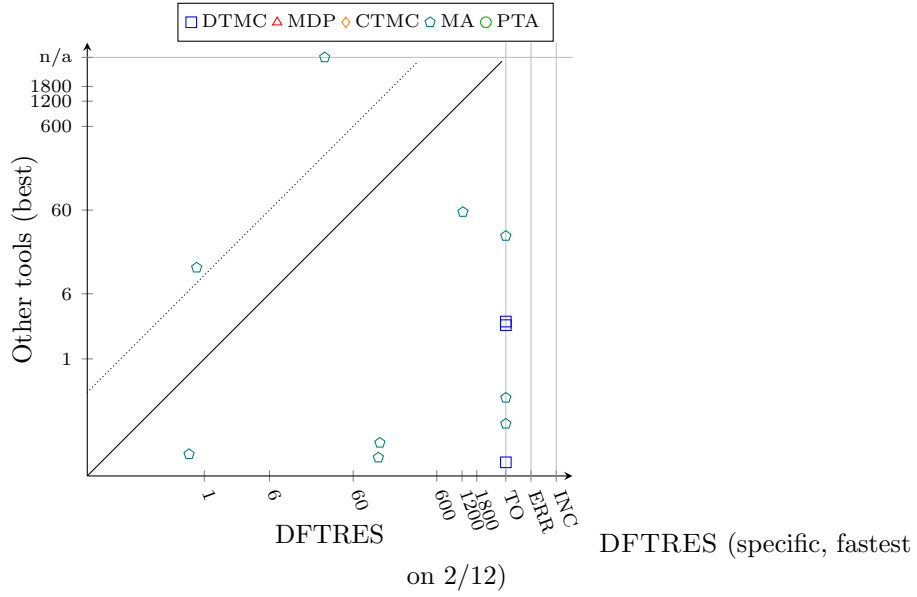

Scatter Plot for ModestFRETpiLRTDP with default settings (n=31).


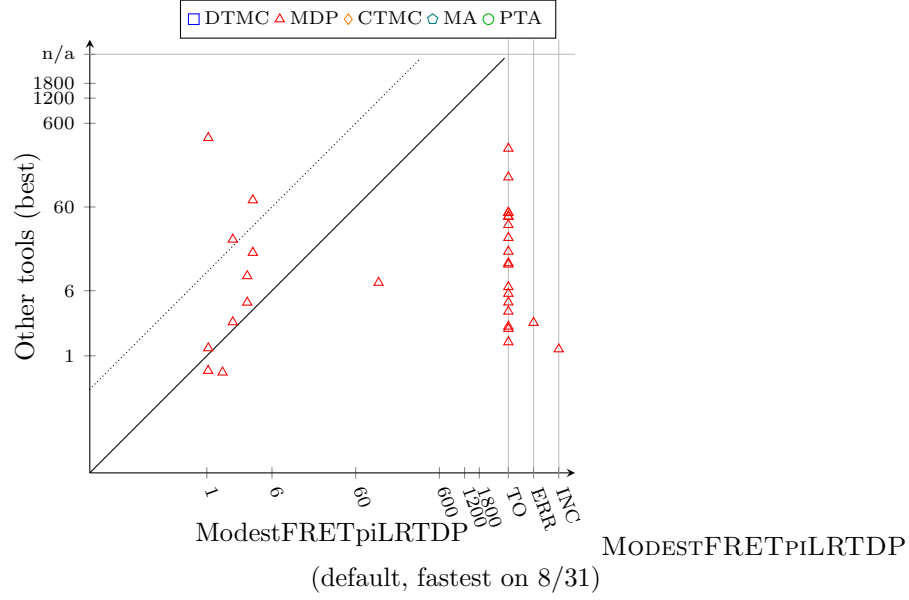


Scatter Plot for ModestFRETpiLRTDP with specific settings (n=31).

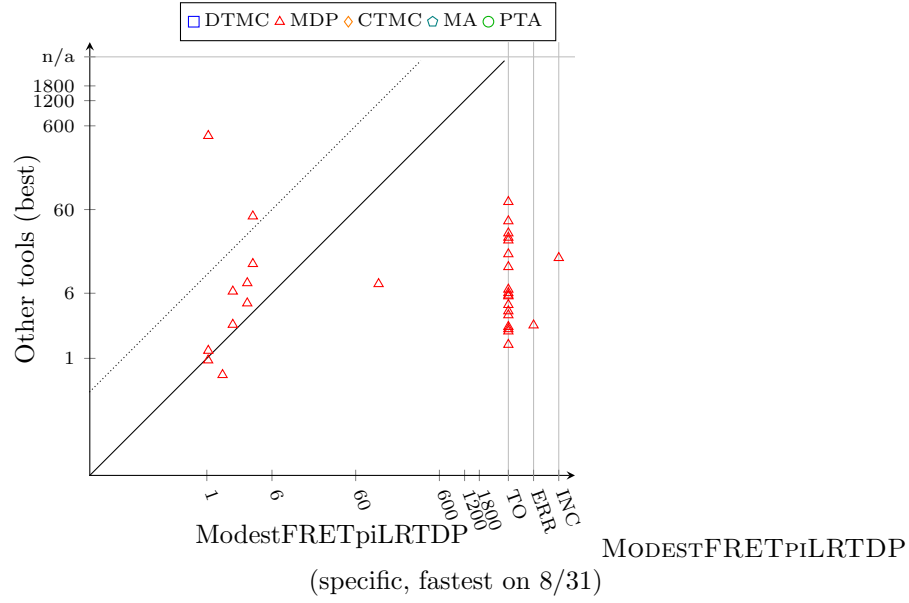


[illegible]

The scatter plot compares the performance of EPMC (specific, fastest on 1/61) against other tools (best). The x-axis is labeled 'ePMC' and the y-axis is labeled 'Other tools (best)'. Both axes use a logarithmic scale with major ticks at 1, 6, 60, 600, 1200, and 1800. A solid diagonal line represents the 1:1 ratio, and a dotted line represents a steeper ratio. Data points are categorized by tool type: DTMC (blue squares), MDP (red triangles), CTMC (orange diamonds), MA (cyan circles), and PTA (green circles). Vertical lines mark the 'ERR' and 'INC' points on the x-axis.

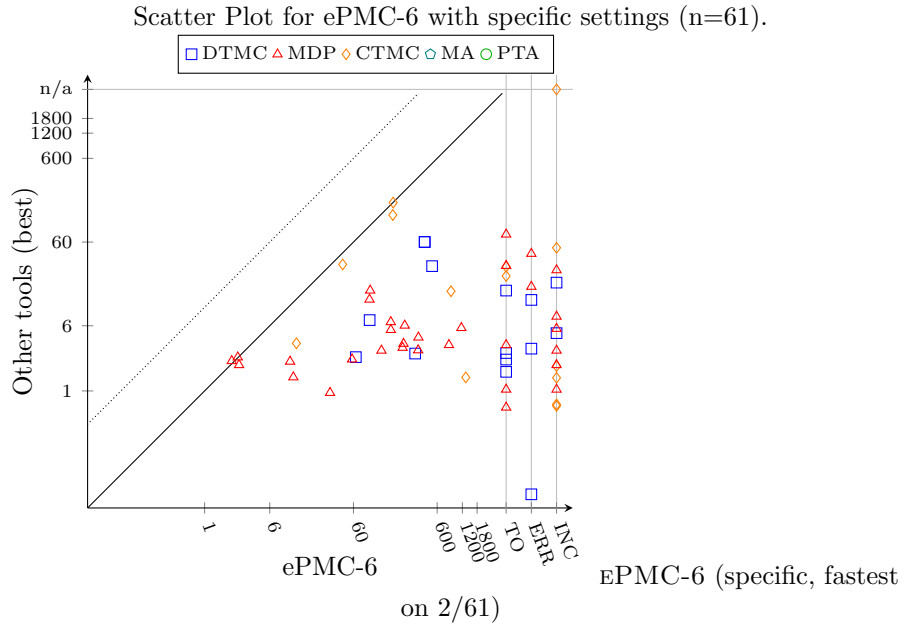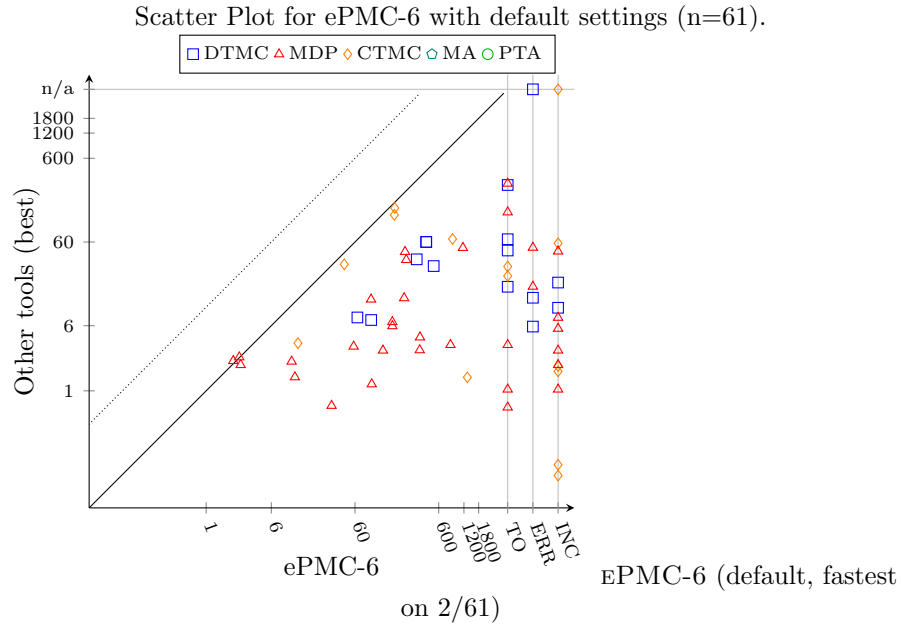

Scatter Plot for Storm vs. Storm-static with default settings (n=96).

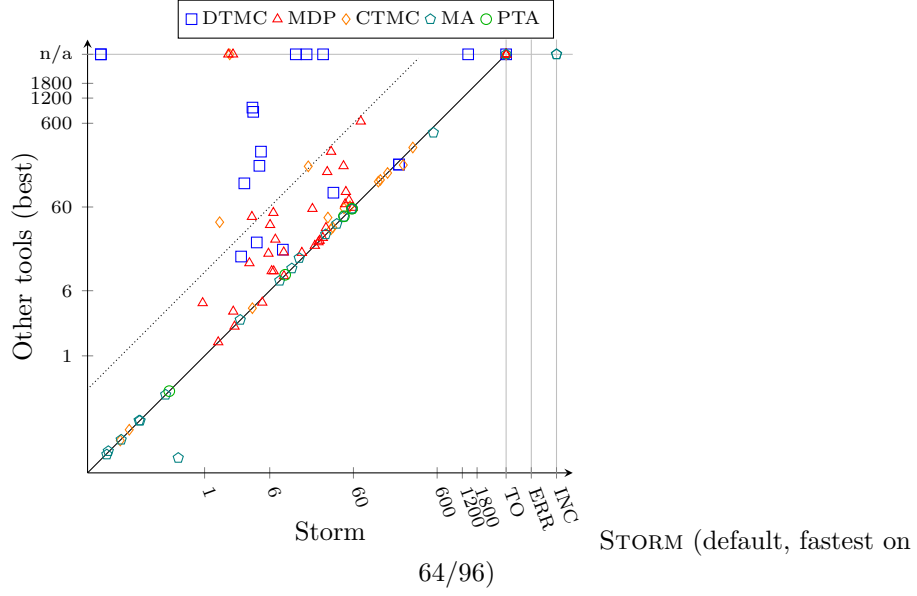

Scatter Plot for Storm vs. Storm-static with specific settings (n=96).

