



## Main Menu

- [Home](#)
- [How to Buy](#)
- [How to Register](#)
- [Our Services](#)
- [Terms of Sale](#)
- [Download](#)
- [About Us](#)
- [Contact Us](#)

## Search Product


## Login

User Name

Password

Remember Me ☐

- [Forgot your password?](#)
- [Forgot your username?](#)
- [Create an account](#)

## Shopping cart

Cart empty

[CH-024 ICL8038 Function Generator Sine Triagle Square wave 0.5Hz-100kHz](#)

[Digital Tachometer RPM meter 12VDC 1- 99990 RPM Max/Min Trigger to Relay on/off](#)

## CH-025 Curve Tracer Adapter IV Curve for Digital-Analog Oscilloscopes

[Back to: Measurement / Testing / Checker](#)



Price:

Sales price: \$80.00

1

[Add to Cart](#)

Manufacturer: [ThailandKit](#)

[Leave a message](#)

## Product Category

[AC Dimmer](#)  
[AM / FM Radio Circuit](#)  
[Animal Voice / Sound Generator](#)  
[Audio / Video Amplifier](#)  
[Charger Circuit](#)  
[DC Motor Controller](#)  
[Digital Panel Meter](#)  
[DIY Project Box](#)  
[Electronic Accessory](#)  
[Electronic Switch Circuit](#)  
[Energy Saving Tool](#)  
[Flasher and Lighting](#)  
[Game](#)  
[High Voltage Generator](#)  
[Internet / Lan / RS232](#)  
[IR / RF / Telephone Remote Control](#)  
[Knob](#)  
[Measurement / Testing / Checker](#)  
[Noise Filter](#)  
[Protection / Detection Circuit](#)  
[Potentiometer \(POT\)](#)  
[Regulator Power Supply](#)  
[Robot and Spare Part](#)  
[Temperature Controller](#)  
[Thaikits Products](#)  
[Timer and Counter](#)

## Description

---


This is curve tracer adapter which you have to connect to your oscilloscope in x-y mode, it can help to improve your oscilloscope to generate IV curve, like a real curve tracer, you can measure the resistor, capacitor, diode, zener diode, LED, junction of transistor.


### Technical information

- Power on by 110V or 220VAC, NOTE : please specify your AC line when you make the payment.
- Voltage 32Vp-p
- 3 x Current Ranges 100uA/V , 1mA/V and 10mA/V
- Max current 150mA
- Current Limit Switch for semiconductor testing 300uA for 100uA/V range , 2mA for 1mA/V range and 10mA for 10mA/V range
- Freq. 50Hz or 60Hz depending on your AC line.
- Comes with the schematic diagram for your trouble shooting / repairing.
- Comes with test probe
- Box 12.0cm x 12.0cm x 5.1cm

Note : This unit doesn't include the BNC to BNC cable. To connect between X-Y channels of curve tracer adapter to your oscilloscope. Recommend to find in Ebay or local source in your country.

Leave a message

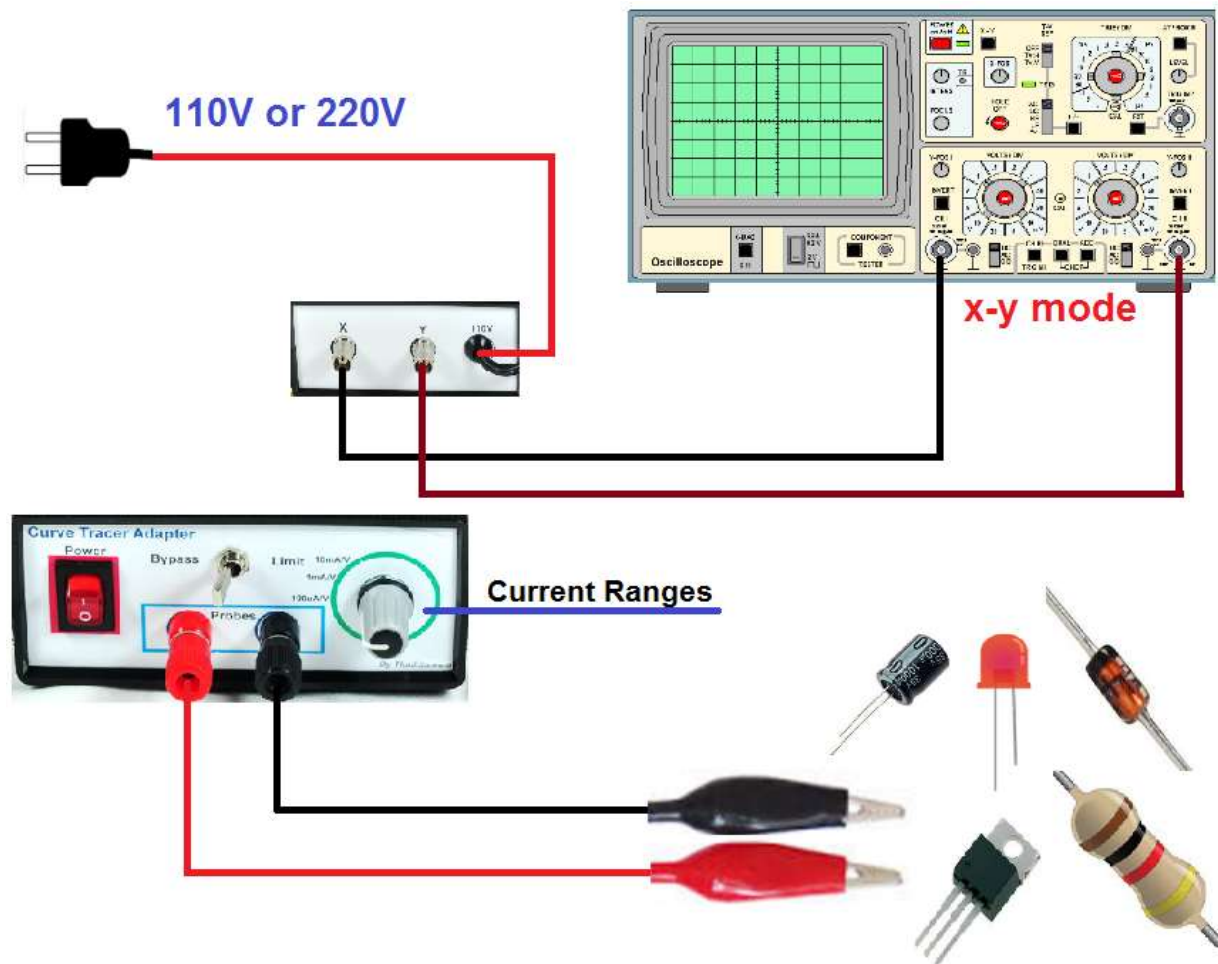

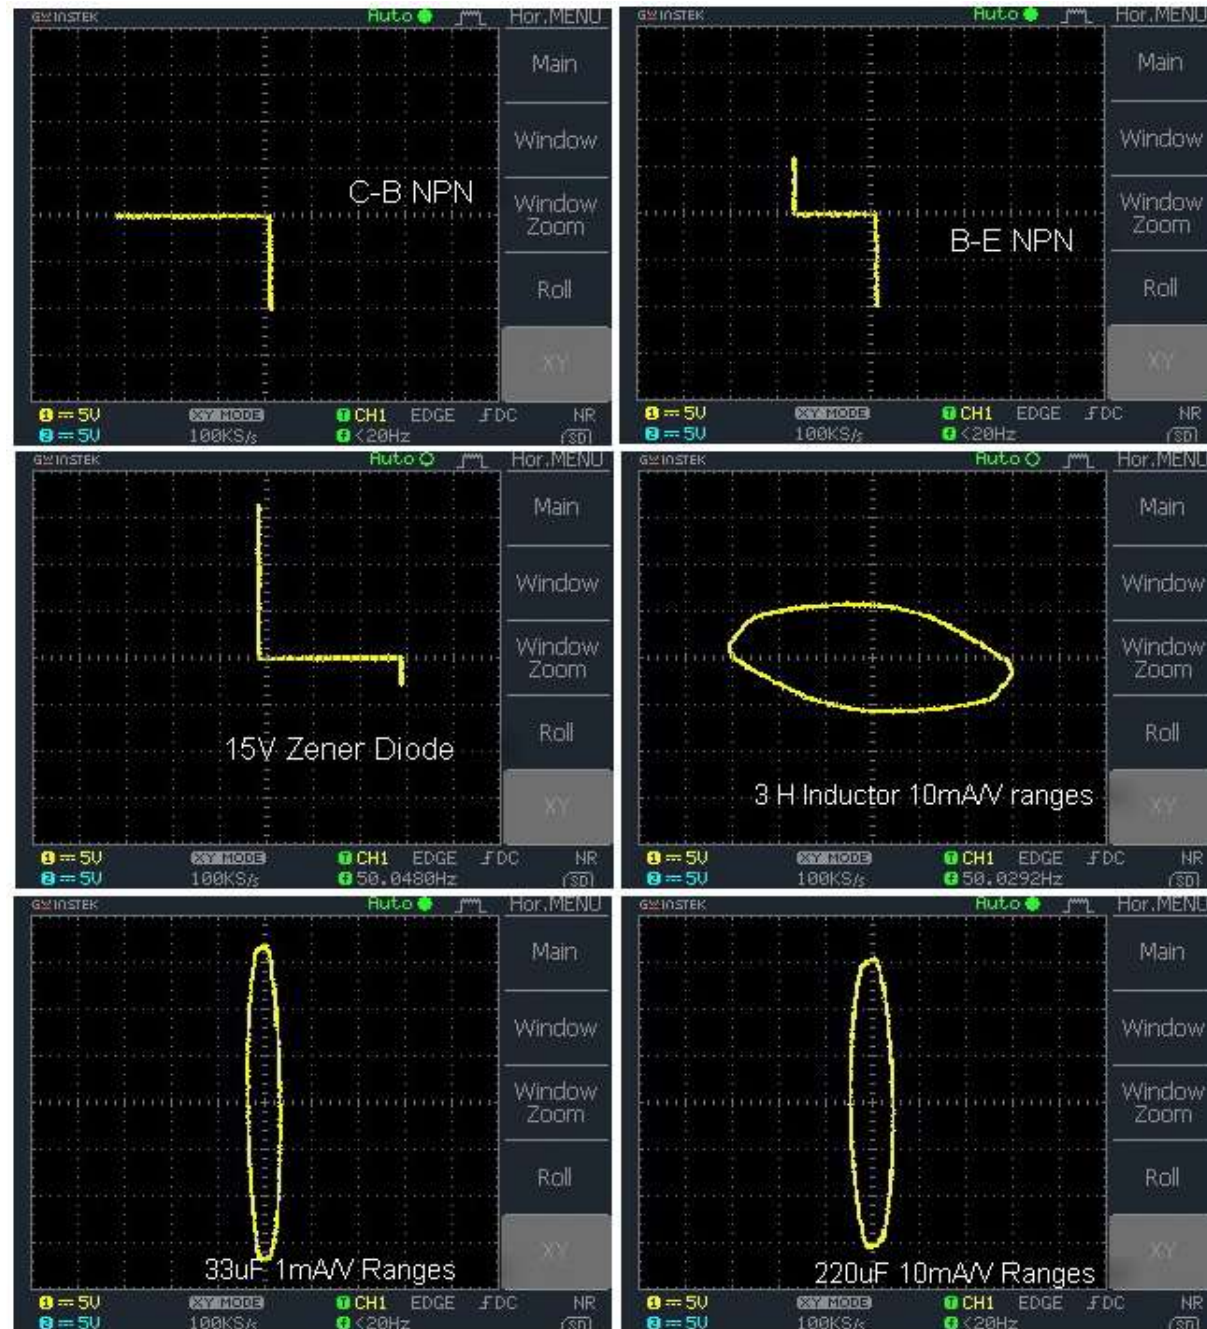

Updated : Jan,2022

© 2007 - 2022 Phoca.cz | Designed by [Phoca](#)

Leave a message