


LilyGO T-A7670G - Dual-CAN Verkabelung

CAN1 = Standard-CAN (TWAI/SN65HVD230) | CAN2 = Display-CAN (Adafruit MCP2515)

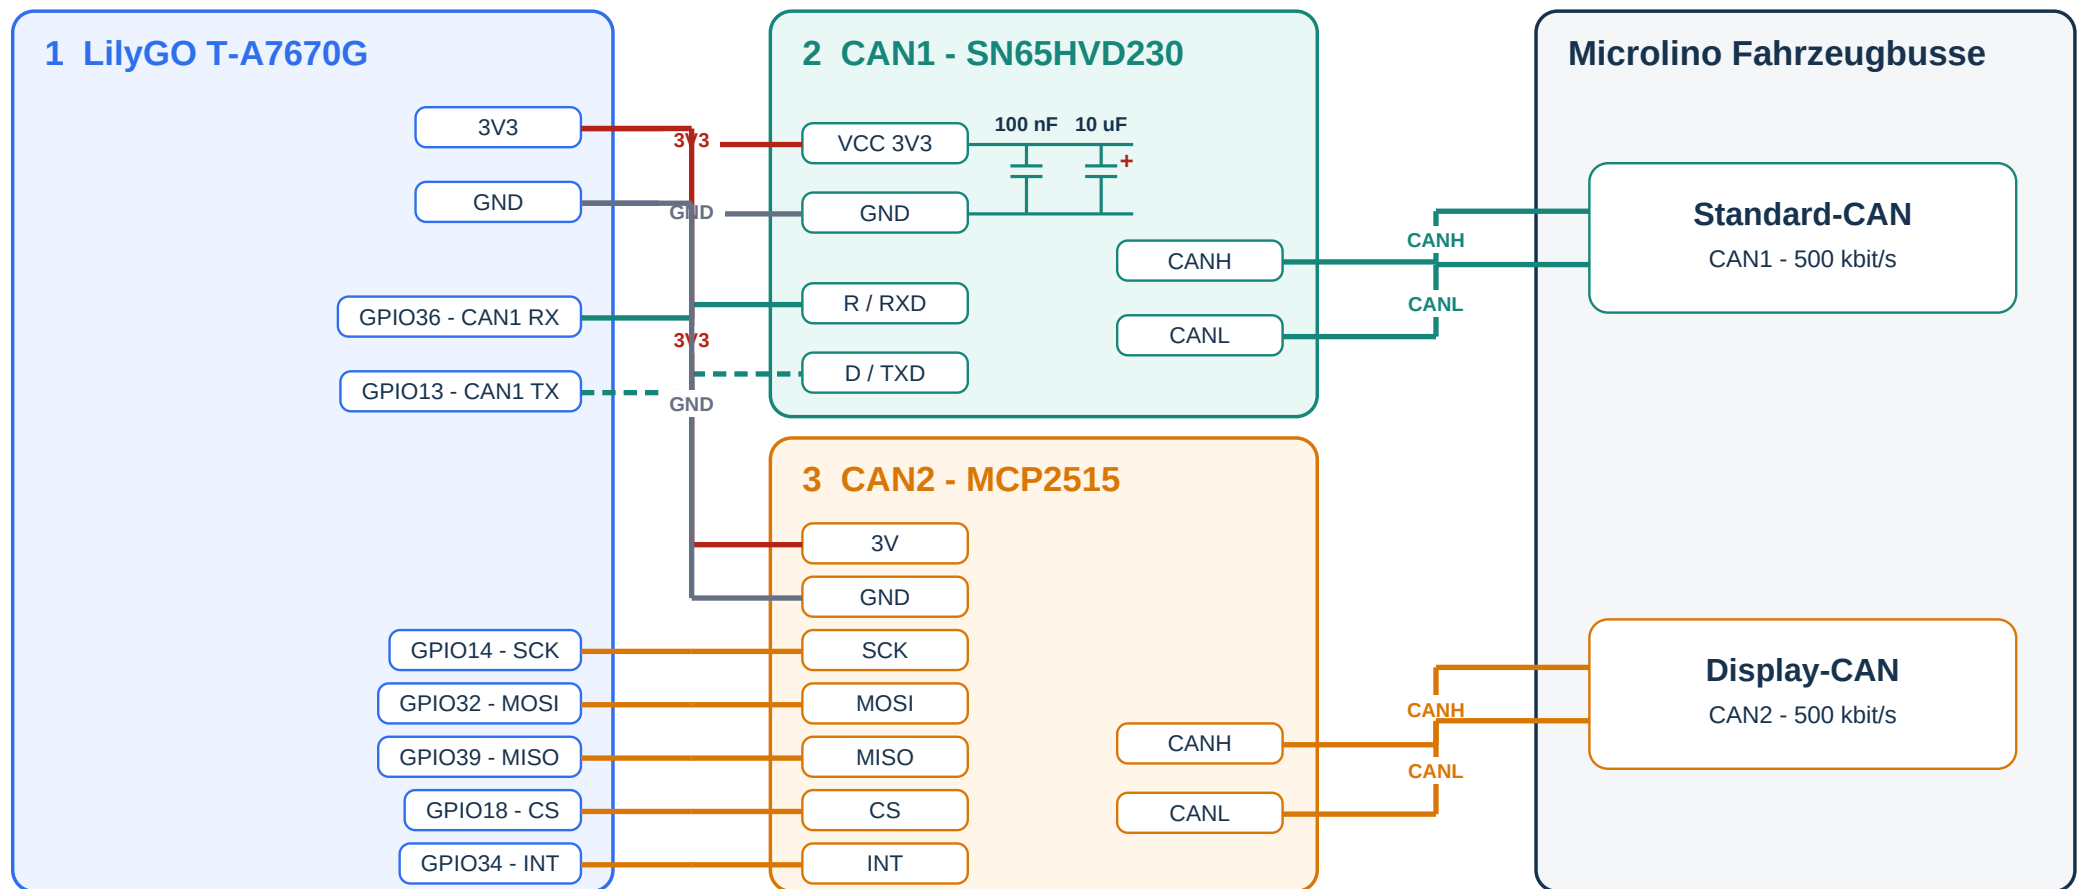

Wichtige Hardware-Regeln

- CAN1: 100 nF + 10 uF parallel, nahe zwischen 3V3 und GND.
- 10-uF-Elko: Plus an 3V3, Minus an GND.
- MCP2515: RST/SLNT an 3V3; TERM offen; keine SD-Karte.
- GPIO2/GPIO15 frei; GPIO32 = MOSI; CAN1-RX = GPIO36.
- Gemeinsame Masse fuer alle Module und CAN-Abgriffe.
- Software Listen-only; CAN1-TX hardwareseitig sicher/recessiv.