


Selecting, Provisioning and Cabling Routers, Switches and PC's

Topology

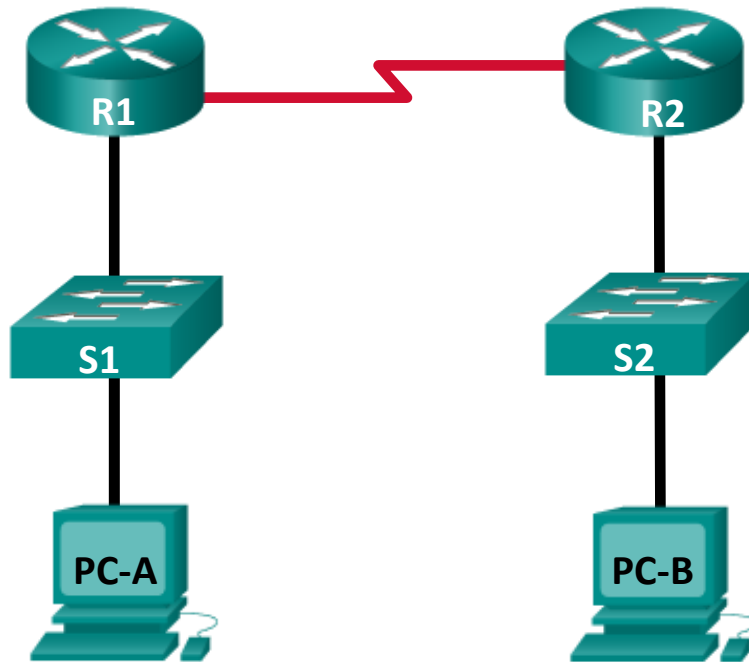

IP Addressing Table

Device	Interface	IP Address	Subnet Mask
R1	G0/0/1	192.168.1.1	255.255.255.0
R1	S0/1/1	192.168.2.1	255.255.255.0
R2	S0/1/0	192.168.2.2	255.255.255.0
R2	G0/0/1	192.168.3.1	255.255.255.0
S1	VLAN 1	192.168.1.2	255.255.255.0
S2	VLAN 1	192.168.3.2	255.255.255.0
PC-A	Eth01	192.168.1.3	255.255.255.0
PC-B	Eth01	192.168.3.3	255.255.255.0

PC-A ist an S1 Port f0/15 angeschlossen.

PC-B ist an S2 Port f0/21 angeschlossen.

R1 ist an S1 Port g0/2 angeschlossen

R2 ist an S2 Port g0/1 angeschlossen