


TO BE COMPLETED AND RETURNED BY THE SELLER

Due-Diligence & Compliance Checklist

Winding Machines · Soft Winding · Hard Winding · Sewing Thread

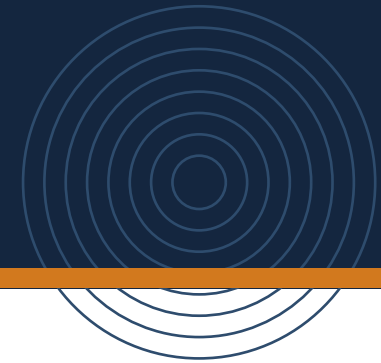

How to complete this checklist

- Mark **exactly one box** — **YES** or **NO** — **for every numbered line**. Leave no line blank.
- **YES** means the equipment offered meets the requirement in full, exactly as stated.
- **NO** means the requirement is not met, or is met only partially, conditionally, or by an alternative arrangement.
- Every **NO** must be explained in *Remarks*. State what is offered instead and the technical reason.
- Partial or conditional compliance is **NO**, not YES. A qualified YES will be read as a deviation.
- Section E items are **requests for information** — mark YES once the information is supplied in *Remarks*.
- Section F covers supply scope and support that the issued specification did not address; it is included so the commercial position is on record.
- Spec references (§) point to sections of the consolidated document *Winding Machine Technical Specification — Soft Winding, Hard Winding & Sewing Thread*.

Seller identification

Company		Offer / quote ref.	
Contact name		Position	
Email / phone		Date	
Machine model(s) offered		Country of manufacture	

SECTION A — Common Electrical Specification applies to all three machines

#	REQUIREMENT	SPEC REF	YES	NO	REMARKS / OBSERVATIONS
A1	Machine is suitable for a three-phase supply, 380–440 V AC , with protective earth (PE) and neutral (N).	§2	☐	☐	
A2	Machine is suitable for a single-phase supply, 220–230 V AC , with protective earth (PE) and neutral (N).	§2	☐	☐	
A3	Machine is rated for a 50 Hz supply frequency.	§2	☐	☐	
A4	PE and N are brought to the machine terminal box in both supply arrangements.	§2	☐	☐	
A5	State the installed / connected electrical load per machine (kW) in Remarks.	§2	☐	☐	

SECTION B — Machine 01 — Soft Winding 48 spindles

Open, permeable packages for package dyeing. Density and its uniformity are the primary acceptance criteria.

#	REQUIREMENT	SPEC REF	YES	NO	REMARKS / OBSERVATIONS
B1	Machine is built with 48 winding spindles .	§4.1	☐	☐	
B2	Each spindle is independently threaded and can be stopped without interrupting the remaining spindles.	§7.1	☐	☐	
B3	Winds cotton yarn, counts 10/1 to 50/1 .	§4.2	☐	☐	
B4	Winds cotton yarn, counts 20/2 to 100/2 .	§4.2	☐	☐	
B5	Winds spun polyester, counts 20/2 to 60/2 SSP .	§4.2	☐	☐	
B6	Winds filament polyester, 50 D to 300 D .	§4.2	☐	☐	
B7	Runs the full declared yarn range without substituting yarn-path components (guides, tensioners, traverse elements).	§7.1	☐	☐	

#	REQUIREMENT	SPEC REF	YES	NO	REMARKS / OBSERVATIONS
B8	Produces a finished package of 160 mm diameter .	\$4.3	☐	☐	
B9	Produces a finished package of 1 kg weight .	\$4.3	☐	☐	
B10	Achieves target package density 0.30 – 0.35 g/cm³ for cotton .	\$4.3	☐	☐	
B11	Achieves target package density 0.35 – 0.40 g/cm³ for polyester .	\$4.3	☐	☐	
B12	Density is uniform between package core and surface , not merely on average across the package.	\$7.1	☐	☐	
B13	Achieves a winding speed of 1 000 m/min (maximum).	\$4.3	☐	☐	
B14	Accepts a bobbin of 160.40 mm overall length with a 143.00 mm main body.	\$4.4	☐	☐	
B15	Accepts bobbin stepped end sections of 10.40 mm and 7.00 mm .	\$4.4	☐	☐	
B16	Accepts left-end bobbin diameters 54.70 / 49.60 / 43.15 mm .	\$4.4	☐	☐	
B17	Accepts right-end bobbin diameters 43.15 / 48.80 / 52.90 mm .	\$4.4	☐	☐	
B18	Resulting package is suitable for package dyeing — dye liquor penetrates to the innermost layers at the same rate as the outermost.	\$7.1	☐	☐	

SECTION C — Machine 02 — Hard Winding 60 spindles

Dense, firm cones for storage, transport and onward processing. Cotton only.

#	REQUIREMENT	SPEC REF	YES	NO	REMARKS / OBSERVATIONS
C1	Machine is built with 60 winding spindles .	\$5.1	☐	☐	
C2	Winds cotton yarn, counts 10/1 to 50/1 .	\$5.2	☐	☐	
C3	Winds cotton yarn, counts 20/2 to 100/2 .	\$5.2	☐	☐	

#	REQUIREMENT	SPEC REF	YES	NO	REMARKS / OBSERVATIONS
C4	Produces a finished cone of 150 mm top diameter .	\$5.3	☐	☐	
C5	Produces a finished cone of 180 mm bottom diameter .	\$5.3	☐	☐	
C6	Produces a finished cone of 155 mm height .	\$5.3	☐	☐	
C7	Produces a finished package of 1 kg weight .	\$5.3	☐	☐	
C8	Achieves target hardness / density 0.40 – 0.50 g/cm³ .	\$5.3	☐	☐	
C9	Achieves a winding speed of 1 000 m/min (maximum).	\$5.3	☐	☐	
C10	Accepts a conical bobbin of 173.00 mm overall length .	\$5.4	☐	☐	
C11	Accepts large-end bobbin diameters 71.00 / 67.00 mm .	\$5.4	☐	☐	
C12	Accepts small-end bobbin diameters 37.00 / 26.00 mm .	\$5.4	☐	☐	
C13	Tension system sustains and regulates the higher tension needed to reach 0.40 – 0.50 g/cm³.	\$7.2	☐	☐	
C14	Traverse control holds square, stable cone edges at the target density (no soft or broken-down edges).	\$7.2	☐	☐	
C15	Finished cone is stable in stacking, handling and transport — does not collapse, telescope or shed layers.	\$7.2	☐	☐	

SECTION D — Machine 03 — Sewing Thread 48 spindles

Precision, length-controlled cones of finished sewing thread. Tension control and automatic doffing are mandatory.

#	REQUIREMENT	SPEC REF	YES	NO	REMARKS / OBSERVATIONS
D1	Machine is built with 48 winding spindles .	\$6.1	☐	☐	
D2	Winds spun polyester, counts 20/2 to 100/2 SSP .	\$6.2	☐	☐	
D3	Winds spun polyester, counts 16/3 to 80/3 SSP (three-ply).	\$6.2	☐	☐	
D4	Winds three-ply thread without introducing or releasing twist that would cause snarling at the point of use.	\$7.3	☐	☐	
D5	Achieves a thread length / weight of 4 000 m per 100 g at yarn count 50/2 spun.	\$6.3	☐	☐	
D6	Length measurement and cut-off guarantee the declared length on every package , not merely on batch average.	\$7.3	☐	☐	
D7	Achieves a winding speed of 1 400 rpm (maximum).	\$6.3	☐	☐	
D8	Active yarn tension control is provided and does not drift as the package builds (not open-loop or purely mechanical).	\$6.3	☐	☐	
D9	Tension is consistent within a package and between packages , preserving thread elongation and strength.	\$7.3	☐	☐	
D10	Automatic doffing is provided — completed packages are ejected and empty carriers introduced without manual intervention.	\$6.3	☐	☐	
D11	Automatic feeding / yarn take-up is provided .	\$6.3	☐	☐	
D12	Accepts a conical bobbin of 114.00 mm overall length .	\$6.4	☐	☐	
D13	Accepts large-end bobbin diameters 38.00 / 35.00 mm .	\$6.4	☐	☐	
D14	Accepts small-end bobbin diameters 28.00 / 12.60 mm .	\$6.4	☐	☐	

SECTION E — Open Items Requiring the Seller's Position information requests

These items were identified as gaps or inconsistencies in the issued specification. Answer each one in Remarks.

#	REQUIREMENT	SPEC REF	YES	NO	REMARKS / OBSERVATIONS
E1	Speed basis for the sewing thread machine. Confirm that 1 400 rpm is the correct basis, and state the equivalent linear speed in m/min together with the reference diameter used.	§8.2	☐	☐	
E2	Sewing thread package envelope. State the finished package diameter, height and weight for the sewing thread machine (not given in the issued documents).	§8.2	☐	☐	
E3	Tension control on the soft and hard winders. State whether active tension control is offered on these two machines, and whether it is standard or optional.	§8.2	☐	☐	
E4	Automatic doffing on the soft and hard winders. State whether automatic doffing / feeding is offered on these two machines, and whether standard or optional.	§8.2	☐	☐	
E5	Density measurement basis. State whether quoted densities are measured on the wound yarn mass alone or on gross package volume including the carrier.	§8.2	☐	☐	
E6	Hard winder density. Confirm the target is 0.40 – 0.50 g/cm³ (issued as “0.40 – .050 gm/cm ³ ”, read as a typographical error).	§8.1	☐	☐	

SECTION F — Supply Scope, Documentation & Support not covered by the issued specification

These items are not stated in the issued documents. They are listed so that scope and support are confirmed in writing rather than assumed.

#	REQUIREMENT	SPEC REF	YES	NO	REMARKS / OBSERVATIONS
F1	Machine footprint and installation layout drawings are provided.	—	☐	☐	
F2	Utility requirements are stated — compressed air, vacuum, extraction, cooling (as applicable).	—	☐	☐	
F3	Noise emission level is stated.	—	☐	☐	

#	REQUIREMENT	SPEC REF	YES	NO	REMARKS / OBSERVATIONS
F4	Applicable safety conformity is declared (e.g. CE marking) with the standards listed.	—	☐	☐	
F5	Fixed guarding, interlocks and emergency-stop circuits conform to the declared safety standard.	—	☐	☐	
F6	Operation and maintenance manuals are supplied in English.	—	☐	☐	
F7	Electrical schematics and a spare-parts list are supplied.	—	☐	☐	
F8	A recommended spare-parts package is quoted.	—	☐	☐	
F9	Installation and commissioning are included in the offer.	—	☐	☐	
F10	Operator and maintenance training is included in the offer.	—	☐	☐	
F11	Warranty period is stated.	—	☐	☐	
F12	Spare-parts availability period after delivery is stated.	—	☐	☐	
F13	Delivery lead time from order is stated.	—	☐	☐	
F14	A factory acceptance test is offered, including sample packages wound to the specified density and dimensions for approval before shipment.	—	☐	☐	
F15	Reference installations running comparable machines can be provided.	—	☐	☐	
F16	Any deviation from this specification is listed in full, with the technical reason and the proposed alternative.	—	☐	☐	

SECTION G — Summary & Declaration to be completed last

Compliance summary (74 requirement lines in sections A to F)

Total YES		Total NO		Lines with remarks		Total deviations	
-----------	--	----------	--	--------------------	--	------------------	--

Overall statement of deviations

List every item marked NO, with the deviation offered and its technical justification. Continue on a separate sheet if required.

Summary	
---------	--

Declaration

I confirm that the responses recorded in this checklist accurately describe the equipment offered; that every **NO** is explained in the corresponding Remarks field; and that no requirement marked **YES** is subject to an unstated qualification, condition or deviation.

Name		Position	
Signature		Date	
Company stamp			

Return instructions

Return this checklist complete, together with the machine layout drawings, electrical schematics and the deviation list referred to in item F16. An incomplete checklist, or one with unexplained NO responses, cannot be evaluated.