

# Winding Machine Technical Specifications

A cleaned, searchable presentation of the supplied data for Soft Winding, Hard Winding, and Sewing Thread machines, including bobbin measurement drawings.

- Winding Machines
- Machine-by-machine layout
- Bobbin dimensions in mm

| MACHINE       | SPINDLES | YARN COMPATIBILITY                         | BOBBIN LENGTH |
|---------------|----------|--------------------------------------------|---------------|
| Soft Winding  | 48       | Cotton; Spun Polyester; Filament Polyester | 160.40 mm     |
| Hard Winding  | 60       | Cotton                                     | 173.00 mm     |
| Sewing Thread | 48       | Spun Polyester                             | 114.00 mm     |

**Common electrical specification:** 3PH (380-440 VAC) or 1PH (220-230 VAC) with PE & N; frequency 50 Hz.

## MACHINE 01

# Soft Winding Machine

48 spindles

### SPINDLES

48

### FREQUENCY

50 Hz

### RATED VOLTAGE

3PH (380-440 VAC) or 1PH (220-230 VAC) with PE & N

## YARN COUNT DATA


Cotton yarn 10/1 to 50/1 & 20/2 to 100/2

Spun Polyester 20/2 to 60/2 SSP

Filament Polyester 50D to 300D

## Bobbin specification drawing

All measurements: mm

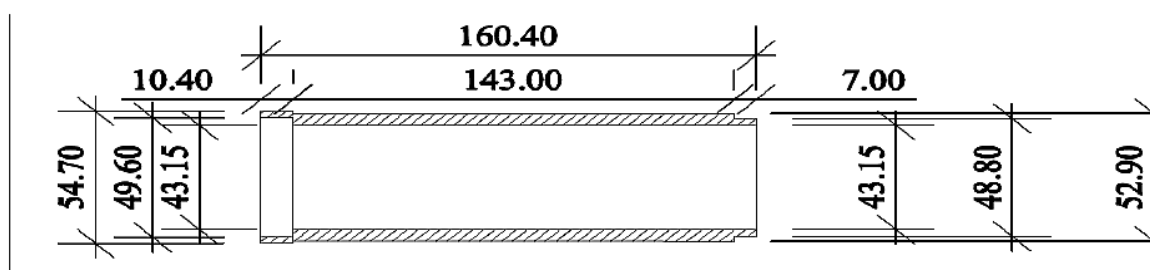

### OVERALL LENGTH

160.40

### MAIN BODY LENGTH

143.00

### END SECTIONS

10.40 / 7.00

### LEFT-END DIAMETERS

54.70 / 49.60 / 43.15

### RIGHT-END DIAMETERS

43.15 / 48.80 / 52.90

### DRAWING TYPE

Soft winding bobbin

Dimension values are transcribed from the supplied bobbin drawing.

## MACHINE 02

# Hard Winding Machine

60 spindles

SPINDLES

**60**

FREQUENCY

**50 Hz**

RATED VOLTAGE

**3PH (380-440 VAC) or 1PH (220-230 VAC) with PE & N**


## YARN COUNT DATA

Cotton yarn

10/1 to 50/1 & 20/2 to 100/2

## Bobbin specification drawing

All measurements: mm

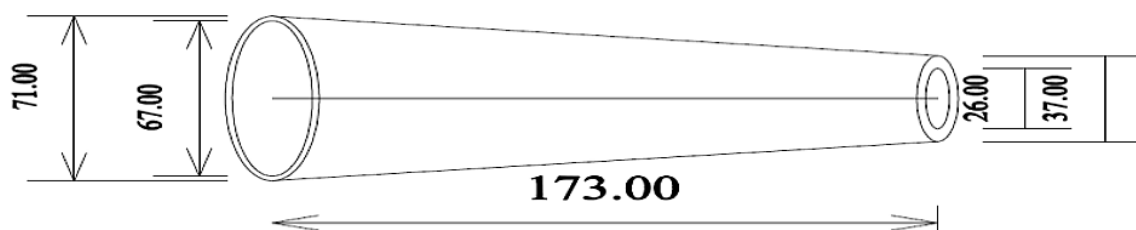

OVERALL LENGTH

**173.00**

LARGE-END DIAMETERS

**71.00 / 67.00**

SMALL-END DIAMETERS

**37.00 / 26.00**

Dimension values are transcribed from the supplied bobbin drawing.

## MACHINE 03

# Sewing Thread Machine

48 spindles

### SPINDLES

48

### FREQUENCY

50 Hz

### RATED VOLTAGE

3PH (380-440 VAC) or 1PH (220-230 VAC) with PE & N


## YARN COUNT DATA

Spun Polyester

20/2 to 100/2 SSP & 16/3 to 80/3 SSP

## Bobbin specification drawing

All measurements: mm

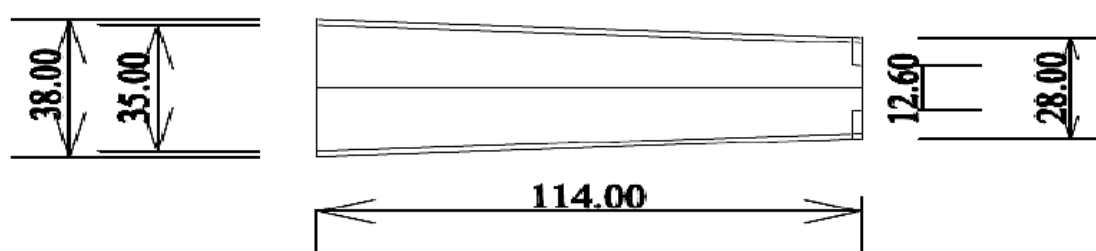

### OVERALL LENGTH

114.00

### LARGE-END DIAMETERS

38.00 / 35.00

### SMALL-END DIAMETERS

28.00 / 12.60

Dimension values are transcribed from the supplied bobbin drawing.