

INTEGRATED TECHNICAL SPECIFICATION

Winding Machine Technical Specifications

Consolidated machine configuration, yarn-count range, finished-package performance requirements and bobbin/core dimensions for Soft Winding, Hard Winding and Sewing Thread machines.

Yarn Winding Machines

Machine-by-machine compliance basis

Performance + package requirements

MACHINE	SPINDLES	YARN COMPATIBILITY	FINISHED OUTPUT REQUIREMENT	MAX SPEED
Soft Winding	48	Cotton; Spun Polyester; Filament Polyester	Package diameter 160 mm; package weight 1 kg	1000 m/min
Hard Winding	60	Cotton	Top dia. 150 mm; bottom dia. 180 mm; height 155 mm; weight 1 kg	1000 m/min
Sewing Thread	48	Spun Polyester	4000 m / 100 g for 50/2 spun yarn	1400 rpm

Common electrical requirement: 3PH (380-440 VAC) or 1PH (220-230 VAC) with PE & N; frequency 50 Hz.

MACHINE 01

Soft Winding Machine

48 spindles

SPINDLES

48

FREQUENCY

50 Hz

RATED VOLTAGE

3PH (380-440 VAC) or 1PH (220-230 VAC) with PE & N

YARN COUNT DATA

Cotton yarn 10/1 to 50/1 & 20/2 to 100/2

Spun Polyester 20/2 to 60/2 SSP

Filament Polyester 50D to 300D

FINISHED PACKAGE & PERFORMANCE

Package diameter 160 mm

Package weight 1 kg


Target density - Cotton 0.30-0.35 gm/cm³

Target density - Polyester 0.35-0.40 gm/cm³

Winding speed 1000 m/min (Max)

Bobbin / Core Specification Drawing

All measurements: mm

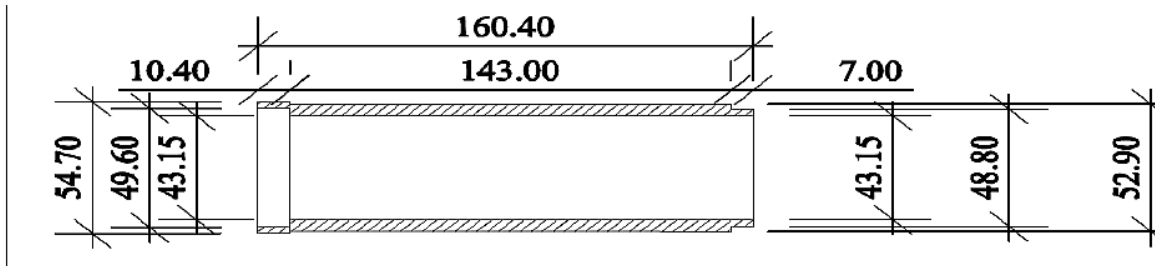

OVERALL LENGTH

160.40

MAIN BODY LENGTH

143.00

END SECTIONS

10.40 / 7.00

LEFT-END DIAMETERS

54.70 / 49.60 / 43.15

RIGHT-END DIAMETERS

43.15 / 48.80 / 52.90

DRAWING TYPE

Soft winding bobbin

Bobbin dimension values are transcribed from the supplied technical drawing; performance values are integrated from the additional machine specification.

MACHINE 02

Hard Winding Machine

60 spindles

SPINDLES

60

FREQUENCY

50 Hz

RATED VOLTAGE

3PH (380-440 VAC) or 1PH (220-230 VAC) with PE & N

YARN COUNT DATA

Cotton yarn 10/1 to 50/1 & 20/2 to 100/2

FINISHED PACKAGE & PERFORMANCE

Package diameter - Top 150 mm

Package diameter - Bottom 180 mm

Package height 155 mm


Package weight 1 kg

Target hardness/density 0.40-0.50 gm/cm³ (confirm)

Winding speed 1000 m/min (Max)

Bobbin/Core & Finished Package Reference

Dimensions: mm

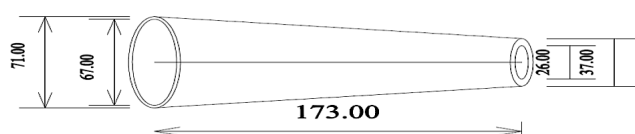

Bobbin / core dimensional drawing



Finished package dimensional reference

BOBBIN OVERALL LENGTH

173.00

LARGE-END DIAMETERS

71.00 / 67.00

SMALL-END DIAMETERS

37.00 / 26.00

The finished package dimensions are separate from the bobbin/core dimensions shown in the original drawing. Hardness/density wording is preserved exactly from the supplied additional specification and requires confirmation.

MACHINE 03

Sewing Thread Machine

48 spindles

SPINDLES

48

FREQUENCY

50 Hz

RATED VOLTAGE

3PH (380-440 VAC) or 1PH (220-230 VAC) with PE & N

YARN COUNT DATA

Spun Polyester 20/2 to 100/2 SSP & 16/3 to 80/3 SSP

THREAD PACKAGE & OPERATING REQUIREMENTS

Thread length / weight 4000 m / 100 gm
(Yarn count 50/2 spun)


Required winding speed 1400 rpm (Max)

Required tension Yes - Required

Automatic doffing / feeding Yes - Required

Bobbin / Core Specification Drawing

All measurements: mm

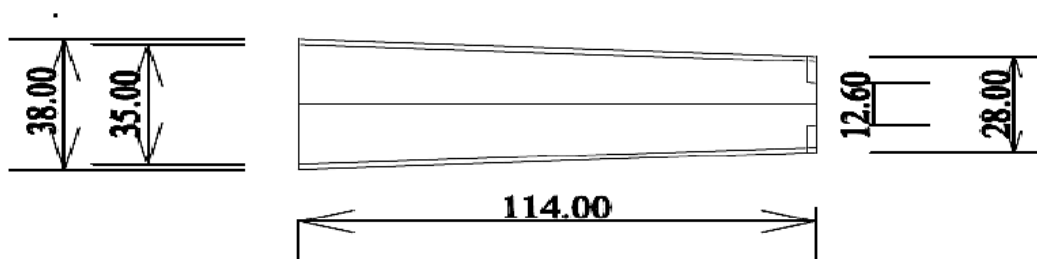

OVERALL LENGTH

114.00

LARGE-END DIAMETERS

38.00 / 35.00

SMALL-END DIAMETERS

28.00 / 12.60

PACKAGE BASIS

4000 m / 100 gm

REFERENCE YARN

50/2 spun

TENSION CONTROL

Required

AUTO DOFFING / FEEDING

Required

Bobbin dimension values are transcribed from the supplied technical drawing; operating and package requirements are integrated from the additional machine specification.