

Temporary devices consume width or redirect an existing route

Partial belt: one physical bypass

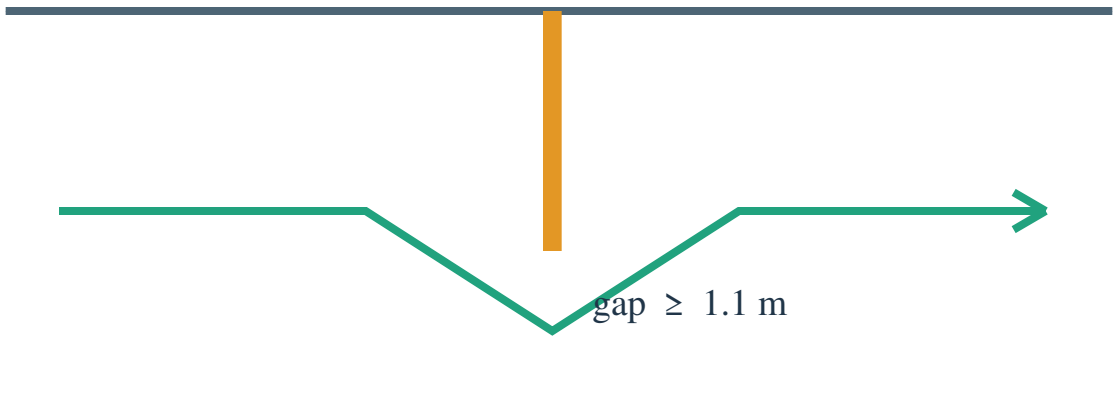

Reduced width, lower/equal capacity, displaced centreline

Full open rail: closed traversal, clear vision

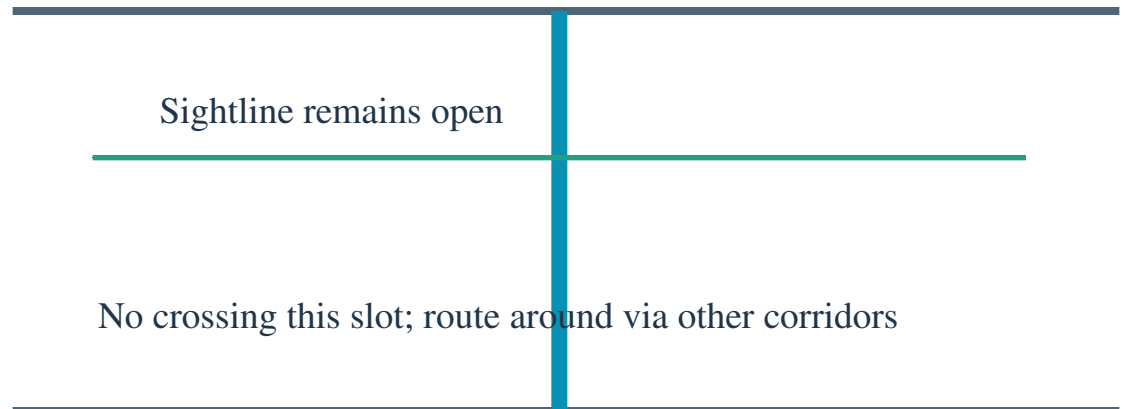

An alternate accessible escape route must remain connected