

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

GPIO Mode and Configuration

Configuration

Group By Peripherals

SYS GPIO I2C RCC

Search Signals

Search (Ctrl+F)


☐ Show only Modified Pins

Pin	Signal o	GPIO ou	GPIO m	GPIO P	Maximu	User Label	Modified
PA0-W...	n/a	Low	Output ...	No pull-...	Low	MOTOR...	☒
PA1	n/a	n/a	Input m...	Pull-up	n/a	BTN3	☒
PB0	n/a	n/a	Input m...	Pull-up	n/a	BTN1	☒
PB1	n/a	n/a	Input m...	Pull-up	n/a	BTN2	☒

Select Pins from table to configure them. Multiple selection is Allowed.

Pinout view

System view

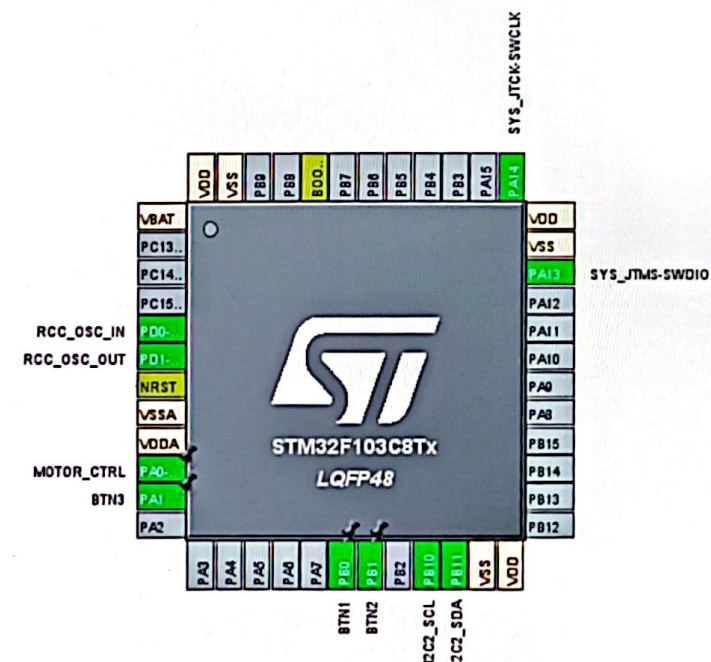



Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Categories A-Z

System Core

- DMA
- GPIO
- IWDG
- NVIC
- ✓ RCC
- ⚠ SYS
- WWDG

Analog >

Timers >

Connectivity

- CAN
- I2C1
- ✓ I2C2
- SPI1
- SPI2
- USART1
- USART2
- ✗ USART3
- USB

Compu...

I2C Mode and Configuration

Mode

I2C I2C

Configuration

Reset Configuration

• NVIC Settings • DMA Settings • GPIO Settings

• Parameter Settings • User Constants

Configure the below parameters :

Search (Ctrl+F)


Master Features

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features

Clock No Stretch Mode	Disabled
Primary Address Length selec...	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

Pinout view System view

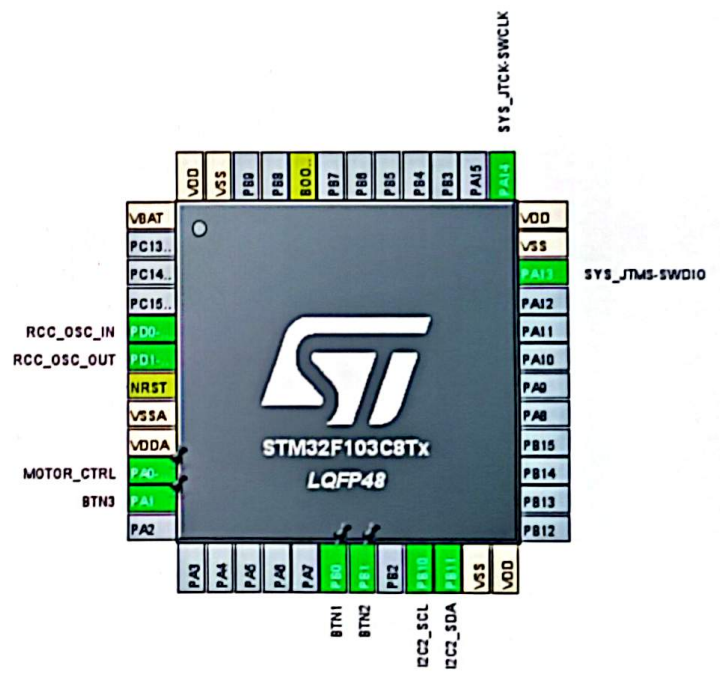

STM32CubeMX Assignment2.ioc: STM32F103C8Tx

STM32CubeMX

FileWindowHelp

myST

19

f

YouTube

X

GitHub

Apple

Android

ST

HomeSTM32F103C8TxAssignment2.ioc - Pinout & ConfigurationGENERATE CODE

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software PacksPinout

Search

CategoriesA-Z

System Core

DMA

GPIO

IWDG

NVIC

✓RCC

▲SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

▲TIM3

TIM4

Connectivity

CAN

I2C1

✓I2C2

SPI1

TIM3 Mode and Configuration

Mode

Slave ModeDisable

Trigger SourceDisable

☒ Internal Clock

Channel1Disable

Channel2Disable

Channel3Disable

Channel4Disable

Combined ChannelsDisable

Configuration

Reset Configuration

User Constants

▼ NVIC Settings

▼ DMA Settings

▼ Parameter Settings

Configure the below parameters :

Search (Ctrl+F)

?

?

?

▼ Counter Settings

Prescaler (PSC - 16 bits value)7199

Counter ModeUp

Counter Period (AutoReload R...4999

Internal Clock Division (CKD)No Division

auto-reload preloadDisable

▼ Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit)Disable (Trigger input effect not delayed)

Trigger Event SelectionReset (UG bit from TIMx_EGR)

Pinout viewSystem view

RCC_OSC_IN

RCC_OSC_OUT

MOTOR_CTRL

BTN3

PA3

PA4

PA5

PA6

PA7

PA8

PA9

PA10

PA11

PA12

PA13

PA14

PA15

PB0

PB1

PB2

PB3

PB4

PB5

PB6

PB7

PB8

PB9

PB10

PB11

PB12

PB13

PB14

PB15

PC13

PC14

PC15

PD0

PD1

NRST

VSSA

VDDA

BTN1

BTN2

I2C_SCL

I2C_SDA

VDD

VSS

VBAT

ST

STM32F103C8Tx

LQFP48

SYS_JTCK-SWCLK

SYS_JTMS-SWDIO

STM32CubeMX Assignment2.ioc: STM32F103C8Tx

STM32CubeMX

FileWindowHelp

myST

100%

Facebook

YouTube

X

GitHub

Arduino

ST

HomeSTM32F103C8TxAssignment2.ioc - Pinout & ConfigurationGENERATE CODE

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software PacksPinout

NVIC Mode and Configuration

Configuration

NVICCode generation

Priority GroupSort by Preemption Priority and Sub PrioritySort by inter

SearchShowavailable interruptsForce DMA

NVIC Interrupt Table	Enabled	Preemption Pri
Non maskable interrupt	☒	0
Hard fault interrupt	☒	0
Memory management fault	☒	0
Prefetch fault, memory access fault	☒	0
Undefined instruction or illegal state	☒	0
System service UsageFault_IRQn	☒	0
Debug monitor	☒	0
Pendable request for system service	☒	0
Time base: System tick timer	☒	15
PVD interrupt through EXTI line 16	☐	0
Flash global interrupt	☐	0
RCC global interrupt	☐	0
TIM3 global interrupt	☒	0
I2C2 event interrupt	☐	0
I2C2 error interrupt	☐	0

☐ EnabledPreemption PrioritySub Priority

Pinout viewSystem view

VDDVSSPB2PB8B00PB7PB8PB5PB4PB3PA15PA14

VBATPC13..PC14..PC15..PD0..PD1..NRSTVSSAVDDAPA0..PA1..PA2PA3PA4PA5PA6PA7PB0PB1PB2PB10PB11VSSVDD

RCC_OSC_INRCC_OSC_OUTMOTOR_CTRLBTN3

BTN1BTN2I2C_SCLI2C_SDA

SYS_JTCK-SWCLKSYS_JTMS-SWDIO

STM32F103C8Tx

LQFP48

