

Power Module for NVIDIA Jetson Orin Nano

FEATURES

- Power Module for NVIDIA Jetson Orin Nano
- Input Voltage Range: DC 21V to 36V
- Output Voltage Spec:
 - 1ch 19V for NVIDIA Jetson Orin Nano
 - 1ch 5V for MCU
 - 2ch 5V for Sensors
 - 2ch 3.3V for Sensors
- Output Current Spec:
 - 1ch Jetson 19V – Up to 2.3A
 - 1ch MCU 5V – Up to 0.5A
 - 2ch 5V – Total Up to 1.5A
 - 2ch 3.3V – Total Up to 0.6A

APPLICATIONS


- NVIDIA Jetson Orin Nano
- Robotics

DESCRIPTION

The Power Module for NVIDIA Jetson Orin Nano is a compact multi-output power supply designed to provide stable power for the Jetson Orin Nano, MCU, and external sensors from a single 21V to 36V DC input. It delivers dedicated 19V, 5V, and 3.3V outputs, making it ideal for integrated embedded AI and robotics systems.

APPLICATION GUIDE

This module is well suited for NVIDIA Jetson Orin Nano-based AI edge computing, robotics, and machine vision applications. Its multiple regulated outputs simplify power distribution for controllers, sensors, and peripheral devices in a compact system.

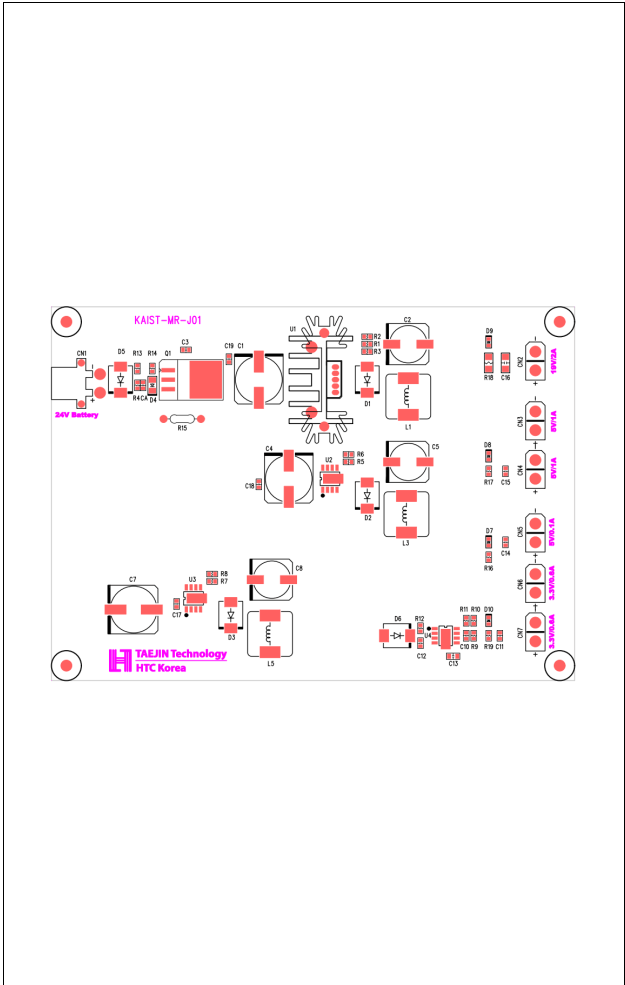


ORDERING INFORMATION



Part Number	KAIST-MR-J01
Device	Power Module for NVIDIA Jetson Orin Nano
Package	Assembled Module (10cm X 14cm)

Power Module for NVIDIA Jetson Orin Nano

POWER TREE

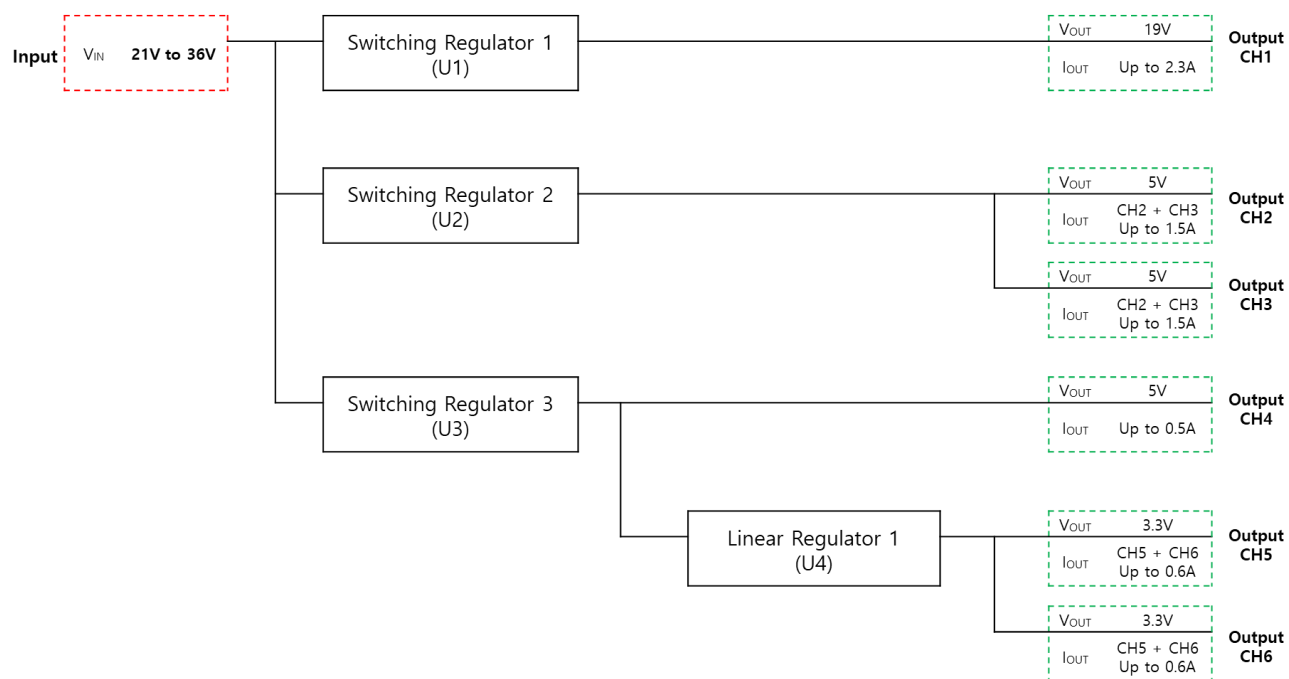


LAYOUT AND SIZE INFORMATION

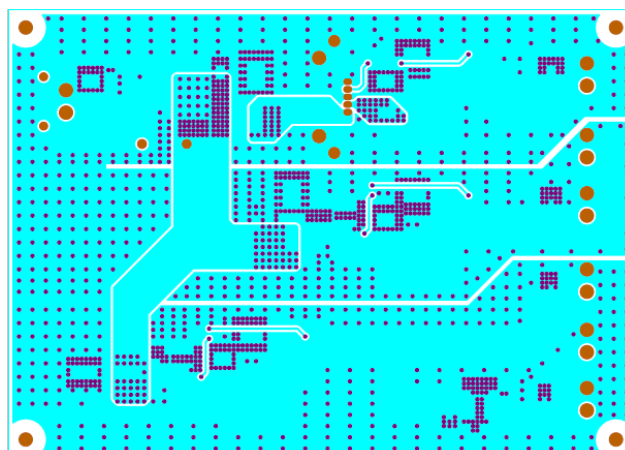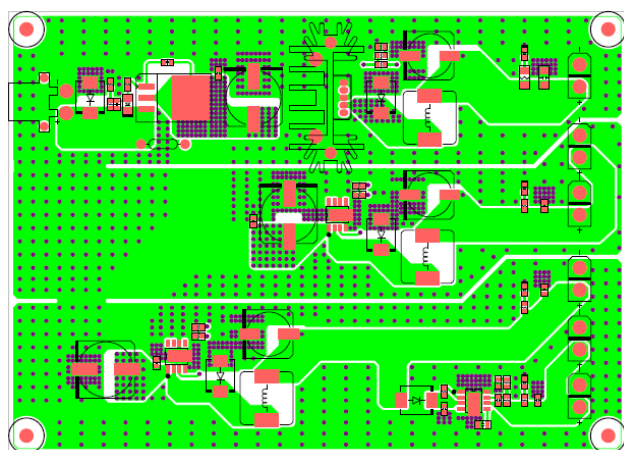

Power Module for NVIDIA Jetson Orin Nano

I/O PORT CONFIGURATION AND DESCRIPTION

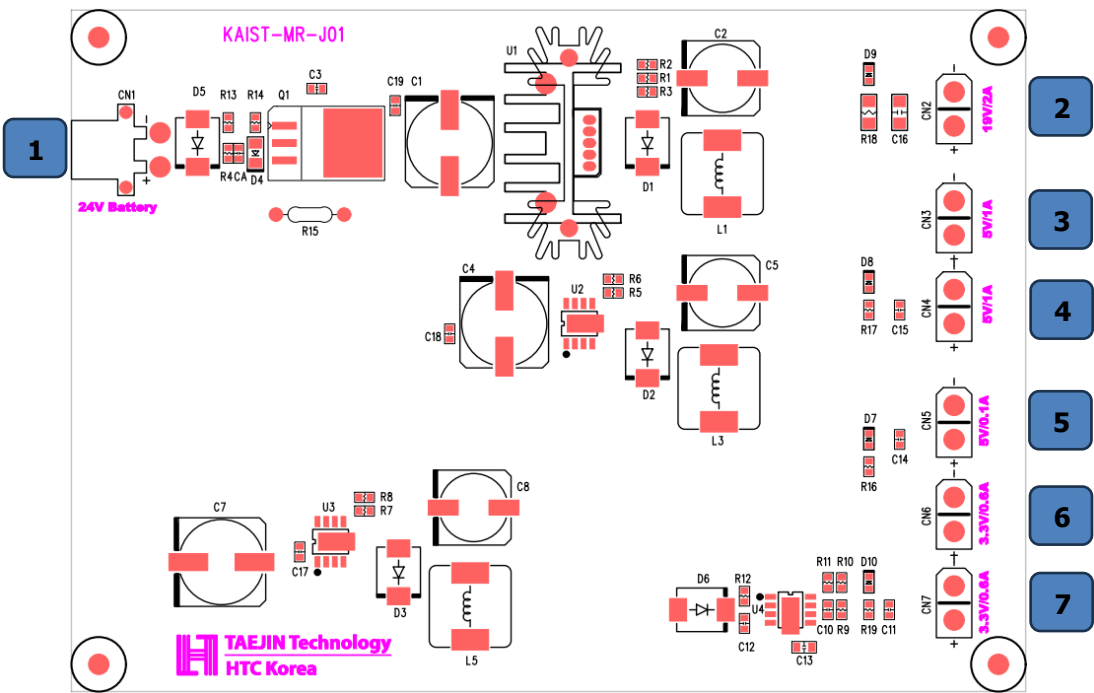

I/O PORT CONFIGURATION AND DESCRIPTION

Designator	Port Name	Port Description
1	Input Connector (XT-30 Female Connector)	Input Connector : DC 21V to 36V
2	Output Connector - CH1 (XT-30 Female Connector)	Output Connector - CH1: 19V Output Current: Max 2.3A
3	Output Connector - CH2 (XT-30 Female Connector)	Output Connector - CH2: 5.0V Total Output Current for CH2 and CH3: Max. 1.5A
4	Output Connector - CH3 (XT-30 Female Connector)	Output Connector - CH3: 5.0V Total Output Current for CH2 and CH3: Max. 1.5A
5	Output Connector - CH4 (XT-30 Female Connector)	Output Connector - CH4: 5.0V Output Current: Max. 0.5A
6	Output Connector - CH5. (XT-30 Female Connector)	Output Connector - CH5: 3.3V Total Output Current for CH5 and CH6: Max. 0.6A
7	Output Connector - CH6 (XT-30 Female Connector)	Output Connector - CH6: 3.3V Total Output Current for CH5 and CH6: Max. 0.6A

Power Module for NVIDIA Jetson Orin Nano

REVISION NOTICE

The description in this datasheet is subject to change without any notice to describe its electrical characteristics properly.