
2- Virtual Router Redundancy Prorotocol
VRRP

A-VRRP properties

1-It is open Standard not specific Vendor
2-It is designed by IETF 1999
3-Hello time each 1 sec and holding time is 3 sec
4-Default priority 100
5-Premption is enabled by default
6-destination address is multicast 224.0.0.18
7-It is Active -passive (fault tolerance) --Master-backup

B-VRRP Configuration

```
R1(config)#interface fa0/0
R1(config-if)#vrrp 3 ip 192.168.1.150
R1(config-if)#vrrp 3 priority 150
R1(config)#track 1 interface fa0/1 line-protocol
R1(config)#interface fa0/0
R1(config-if)#vrrp 3 track 1 decrement 60
```

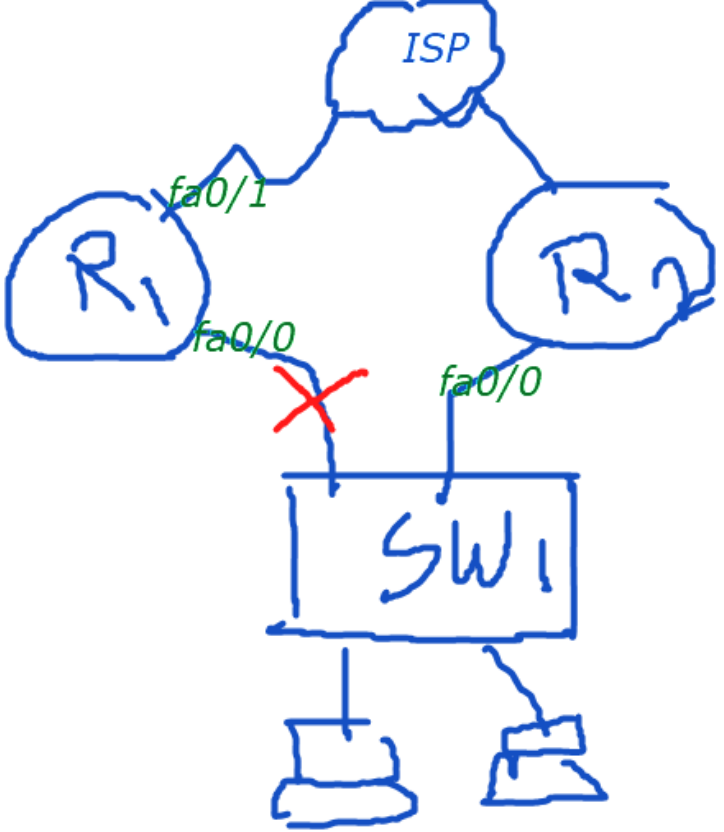

3-Gateway Load balance Protocol
GLBP

A)GLBP properties

1-It is created by cisco at 2005
2-It supports Active-Active "Load Sharing "
3-Active Virtual Gateway (AVG) router works as " the point man "
4-Other routers are called Active Virtual Forwarder (AVF) router
5-Hello interval is 3 sec and the holding time is 10 sec
6-Destination multicast address 224.0.0.102



B)GLBP Configuration

R1(config)#interface fa0/0
R1(config-if)#glbp 5 ip 192.168.1.150
R1(config-if)#glbp 5 load-balancing {Weighted ; Round robin ;host dependent }
R1(config-if)#glbp 5 weighting 3

By default the load balancing is round robin