
# Stormwater and flood management

Water routes and control points / plan 1:340 at A3 / discharge subject to authority consent

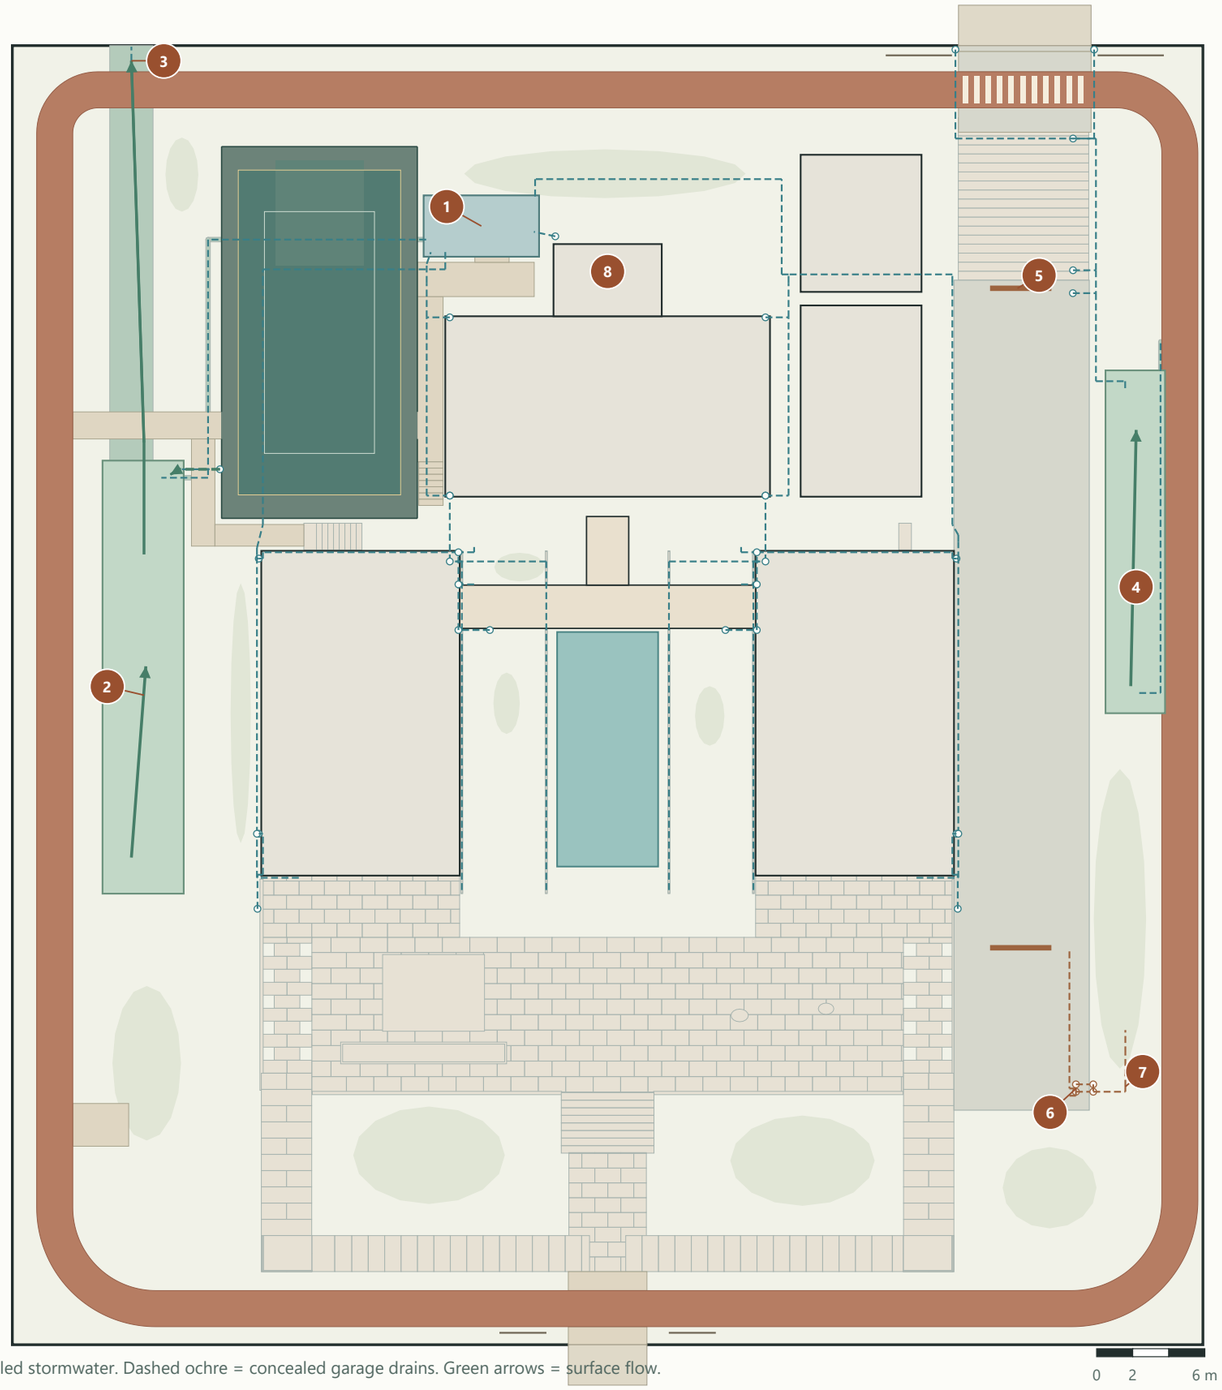


Dashed teal = concealed stormwater. Dashed ochre = concealed garage drains. Green arrows = surface flow.

## WATER SYSTEMS

**1 Roof-water cistern**

Nominal working volume 32.4 m³ from a 6.0 × 3.0 × 1.8 m usable envelope. Reserve freeboard and confirm operating levels.

**2 West planted store**

House A's collector passes below the court-side kitchen path. Clean overflow enters the west forebay and depression; bed −0.72 m, concept weir −0.27 m.

**3 North overflow reserve**

The swale continues toward the north boundary. Confirm legal receiving point, tailwater and a non-damaging exceedance route.

**4 East rain garden**

A separate planted depression intercepts east perimeter runoff. Keep garage water outside this landscape system.

**5 Crest exclusion**

The vehicle crest, cutoff drainage and closure sockets intercept approach water before the ramp descent.

**6 Garage collection**

A flush cover serves the ramp wet well. Below the cover, duty and standby pumps feed the separate oily-water discharge.

**7 Separator access**

Allow treatment and inspection of vehicle runoff before a separately approved discharge.

**8 Raised controls**

Critical electrical and pump-control equipment occupies the rear annex at +1.20 m.