

EdgeTX Pilot Info Splash Screen Generator User Guide

EdgeTX Pilot Info Splash Screen Generator - v1.1.2

1. Pilot Info File
Connect the radio via USB and select "USB Storage (SD)" on the radio screen. Then click 'Auto-Detect' to import 'PilotInfo.Txt' from radio.
Dri... **Auto-Detect** Browse... Enter Pilot Info **Open PilotInfo.Txt**

2. Pilot Data
Pilot Name: John Doe
Street Address: 1234 Main Street
City / State / ZIP: Any City, Any State, 12345
Phone: (123) 123-1234
AMA #: AMA123456
FAA #: FAA123456789
TRUST #: EASY1234567890

3. Appearance
Background image: (none — built-in design) **Browse...** Dark Tint: 63%
Background Color **Accent Color - Both Top and Bottom Bands**
☒ Top accent band background **Set Color** Opacity: 100%
☒ Bottom ID band background **Set Color** Opacity: 100%
Top Title Font & Color **Pilot Name Font & Color** **Address/Phone Font & Color**
Address/Phone Label Font & Color **AMA/FAA/TRUST Label Font & Color** **AMA#, FAA#, TRUST# Font & Color**
☒ Show field labels (Street Address, City/State/Zip, Phone)
☒ Show field labels (AMA #, FAA #, TRUST #)
☒ Stacked (AMA / FAA / TRUST centred, one per line)
☐ 3-column (AMA | FAA | TRUST side by side)

Preview (480 x 272 pixels - actual Splash Screen size for RadioMaster TX16S MK I/II)
PILOT IDENTIFICATION CARD
John Doe
Street Address: 1234 Main Street
City / State / ZIP: Any City, Any State, 12345
Phone: (123) 123-1234
AMA #: AMA123456
FAA #: FAA123456789
TRUST #: EASY1234567890
(Background images are auto-scaled to fit)

Step-by-Step Instructions
Step 1: On your radio run the 'PilotInfo' lua script in your 'Tools' menu - enter all 7 fields, then press 'SAVE'.
Step 2: Connect the radio to this PC with a USB data cable.
Step 3: On the radio screen, select 'USB Storage (SD)'.
Step 4: On the 'EdgeTX Pilot Info Screen Generator' click 'Auto-Detect'. If 'Auto-Detect' fails, click 'Browse' and navigate to the SD card drive root on your radio (e.g. E:). - it may be different on your PC).
Step 5: Optionally choose a background PNG in 'Appearance' and adjust the 'Dark Tint' slider to your preference.
Step 6: Click 'Generate Preview' and review the image.
Step 7: Click 'Save Splash Screen' to save your splash screen.
Step 8: Disconnect the USB cable from the radio, then power off and back on. Your new pilot info splash screen will appear! Adjust the display time of 'splash.png' on your radio.

Save Pilot Info **Save Splash Screen** **Re-Generate Preview** **Reset Preview to Defaults**
Preview ready: Use Auto-Detect or Browse to set the SD card path, then Save
Regulatory Guide **About** **Exit**

CONTENTS

1. Overview of the Main Window	1
2. Group 1 — Pilot Info File	2
2.1 Auto-Detect Button	2
2.2 Drive Text Box (small box next to Auto-Detect)	3
2.3 Browse... Button	3
2.4 Open PilotInfo.Txt Button.....	3
2.5 Enter Pilot Info Button.....	3
3. Group 2 — Pilot Data	3
4. Group 3 — Appearance	4
4.1 Background Sub-section.....	5
Background Image Template (text box).....	5
Browse... Button (background template)	5
Clear Button (background template).....	5
Background Color Button	6
Dark Tint Slider (only active when a template image is loaded).....	6
4.2 Both Bands Color (Accent Color Button)	6
4.3 Top Accent Band Background Sub-section	6
4.4 Bottom ID Band Background Sub-section	7
4.5 Text Font and Color Sub-section.....	7
4.6 Layout Sub-section.....	8
5. Right Column — Preview and Instructions.....	8
5.1 Preview Panel	8
5.2 Step-by-Step Instructions Panel.....	9
6. Action Buttons.....	10
7. Enter Pilot Information Dialog	11
8. Regulatory Guide Screen	11
8.1 Essential Rules & Requirements.....	12
8.2 Federal Aviation Administration (FAA) Group.....	12
8.3 Academy of Model Aeronautics (AMA) Group	13
8.4 Local AMA Clubs Group	13
8.5 Close Button.....	13
9. About Window.....	13
10. Typical Workflows	14
10.1 First-Time Setup with Radio Connected	14
10.2 Designing Without a Radio.....	14
10.3 Updating an Existing Splash Screen	14
11. Splash Card Layout Reference.....	15
12. Tips and Troubleshooting.....	15

12.1 The radio SD card is not found by Auto-Detect.....	15
12.2 PilotInfo.txt not found on the SD card.....	15
12.3 Text is clipped or overflows in the preview	15
12.4 The background image looks very dark.....	16
12.5 The preview does not refresh after a change	16
12.6 Save Splash Screen button is disabled	16
12.7 Colors look different on the radio screen vs. the preview	16
13. US Regulatory Quick Reference.....	16
Appendix — Compatible Radio Models	17

EdgeTX Pilot Info Splash Screen Generator

Version 1.1.2

Complete User Guide

What This Program Does

The EdgeTX Pilot Info Splash Screen Generator is a Windows desktop application that creates a personalised pilot identification card image (480 × 272 pixels) for use as the startup splash screen on EdgeTX colour-screen radio transmitters such as the RadioMaster TX16S MK I/II. It displays your name, address, phone number, and regulatory identification numbers (AMA, FAA, and TRUST) every time the radio powers on, providing an at-a-glance ID card for field use.

The program gives you full control over layout, colors, fonts, and a custom background image, then saves the finished graphic directly to the radio SD card or to your PC, to be used in conjunction with the 'Splash Rotate' lua script.

It also incorporates the loading, entering, editing and saving of a 'PilotInfo.Txt' file directly to the radio SD card or to your PC, to be used in conjunction with the 'Pilot Info' lua script.


These additional scripts are available at the Git Hub Repository '[MPtasz](#)'.

1. Overview of the Main Window

The main window is divided into two columns. The left column contains all controls, organized into numbered groups. The right column shows the preview, a step-by-step instruction panel and various Save, Re-Generate, and Reset buttons, along with a notification panel below the buttons.


Left Column — Controls	Right Column — Preview & Instructions
Group 1 — Pilot Info File Group 2 — Pilot Data Group 3 — Appearance	Live 480 × 272 preview image Step-by-step instruction text Save, Re-Generate, Reset buttons Notification panel Regulatory, About, Exit buttons

💡 Most controls update the preview automatically the moment you change them. The Re-Generate Preview button is only needed for unusual situations or to force a manual refresh.

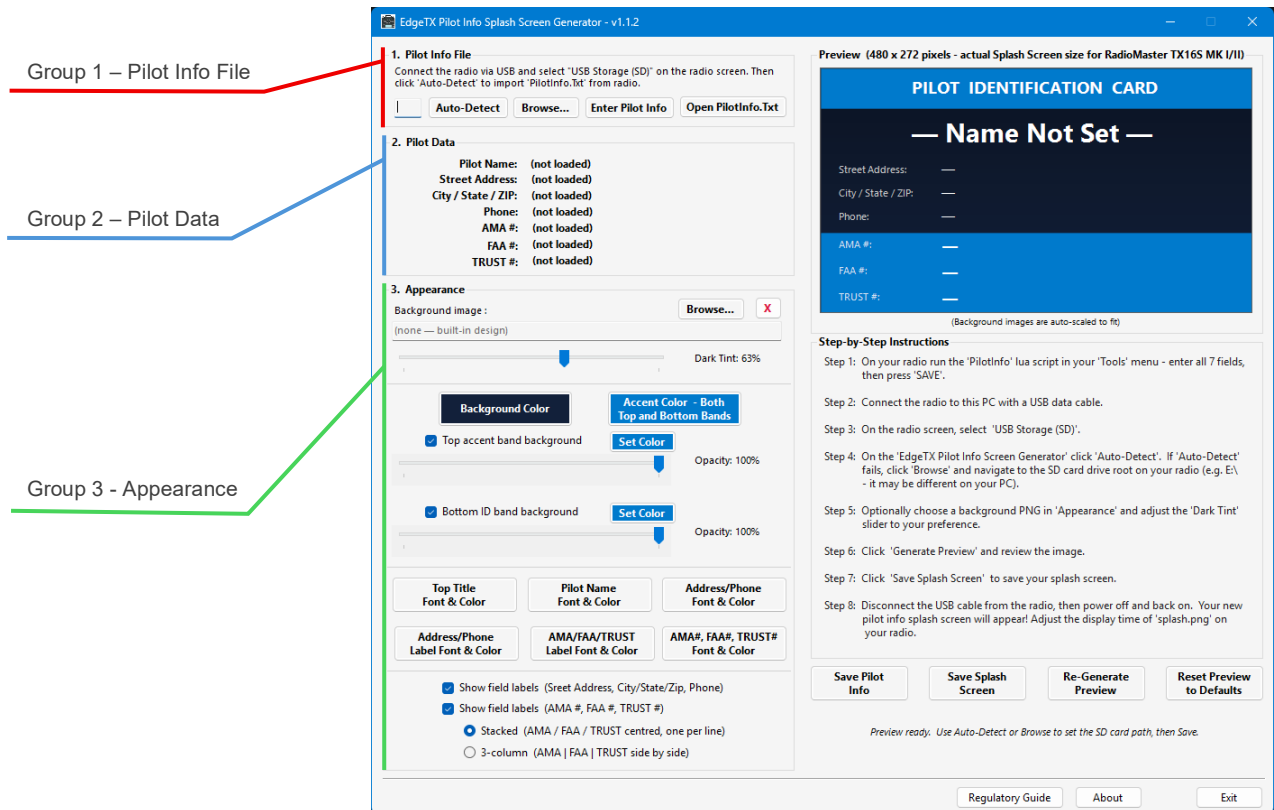

2. Group 1 — Pilot Info File

This panel at the top of the left column is where you get your pilot data into the program. There are three ways to load data (Auto-Detect, Browse, and OpenPilotInfo.Txt) and one way (Enter Pilot Info) to enter it directly without a radio.

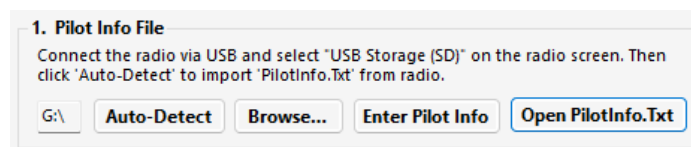

2.1 Auto-Detect Button

Scans every logical drive connected to your PC (C:\, D:\, E:\, F:\, etc.) looking for the file SCRIPTS\TOOLS\PilotInfo.txt — the file created on the SD card by the PilotInfo Lua script on the radio. When found, the program reads all seven data fields, populates the Pilot Data panel, and immediately generates a preview.

Auto-Detect

💡 Before clicking Auto-Detect: connect the radio via USB cable, then on the radio screen select > USB Storage (SD). Wait a moment for the drive to appear in Windows Explorer before clicking the Auto-Detect button.

2.2 Drive Text Box (small box next to Auto-Detect)

Displays the drive root path that was found or manually selected, for example E:\ . It is read-only during normal use — the path is set either by Auto-Detect, or Browse.

2.3 Browse... Button

Opens a Folder Browser dialog so you can manually navigate to and select the root folder of the radio SD card. Use this if Auto-Detect cannot find the drive — for example if the SD card is in a card reader rather than the radio itself. After selection the program reads PilotInfo.txt from the chosen location.

2.4 Open PilotInfo.Txt Button

Opens a standard file browser dialog so you can select any PilotInfo.txt file anywhere on your PC (or Radio) — but you do not need a radio connected at all. After you choose the file the data is loaded and the preview regenerates automatically. This is the fastest way to work when you have already saved a PilotInfo.txt from a previous session.

2.5 Enter Pilot Info Button

Opens the Enter Pilot Information dialog (see Section 6) where you can type all seven fields directly. Use this when you do not have the radio or a saved PilotInfo.txt file available or if you need to edit existing data. After clicking OK the data loads and the preview generates.

The dialog box titled "Enter Pilot Information — No Radio Required" contains the following fields:

- Pilot Name (max 30):
- Street Address (max 50):
- City / State / ZIP (max 50):
- Phone (max 15): (xxx) xxx-xxxx
- AMA # (max 10):
- FAA # (max 15):
- TRUST # (max 20):

Buttons: OK, Cancel

3. Group 2 — Pilot Data

This read-only panel shows the seven data fields that will appear on the splash card. The values are populated automatically whenever data is loaded or entered. Empty fields display in orange-red; loaded fields display in blue.

2. Pilot Data

Pilot Name: John Doe
Street Address: 1234 Main Street
City / State / ZIP: Any City, Any State, 12345
Phone: (123) 123-1234
AMA #: AMA123456
FAA #: FAA123456789
TRUST #: EASY1234567890

Field	Description & Limits
Pilot Name	Your full name as it will appear by default, large and centered on the card. Maximum 30 characters.
Street Address	Street number and name. Maximum 50 characters.
City / State / ZIP	City, state and ZIP code on one line. Maximum 50 characters.
Phone	Contact phone number. Format: (xxx) xxx-xxxx. Maximum 15 characters.
AMA #	Your Academy of Model Aeronautics membership number. Maximum 10 characters.
FAA #	Your FAA drone registration number. Maximum 15 characters.
TRUST #	Your TRUST test certificate number. Maximum 20 characters.

⚠ The values shown here are for display only. To change them use Enter Pilot Info, Open PilotInfo.Txt, or Auto-Detect. The data is written to the SD card only when you use Save Splash Screen (which writes splash.png) or Save Pilot Info (which writes PilotInfo.txt).

4. Group 3 — Appearance

This is the main design studio for your splash card. It is divided into four visual sub-sections separated by horizontal lines. Almost every control here updates the preview instantly.

3. Appearance

Background image : Browse... X
 (none — built-in design)

Dark Tint: 63%

Background Color **Accent Color - Both Top and Bottom Bands**

☒ Top accent band background Set Color
 Opacity: 100%

☒ Bottom ID band background Set Color
 Opacity: 100%

Top Title Font & Color **Pilot Name Font & Color** **Address/Phone Font & Color**

Address/Phone Label Font & Color **AMA/FAA/TRUST Label Font & Color** **AMA#, FAA#, TRUST# Font & Color**

☒ Show field labels (Street Address, City/State/Zip, Phone)
☒ Show field labels (AMA #, FAA #, TRUST #)
☒ Stacked (AMA / FAA / TRUST centred, one per line)
☐ 3-column (AMA | FAA | TRUST side by side)

4.1 Background Sub-section

Background Image Template (text box)

Shows the filename of the currently selected background image. When empty, the built-in gradient design is used. You can type a path directly into this box; the preview regenerates as soon as the text changes.

Background image : Browse... X
 (none — built-in design)

Browse... Button (background template)

Opens a file dialog filtered to PNG files. The selected image is scaled to fit the 480 × 272 canvas. (if the image has a different aspect ratio it will appear slightly stretched) A semi-transparent dark tint (adjustable with the Dark Tint slider below) is overlaid so all text remains readable regardless of the image content.

Browse...


Clear Button (background template)

Removes the selected background image. The preview immediately switches back to the built-in gradient using the chosen Background Color and the preview re-generates.

X

Background Color Button

Opens the Windows color picker pre-seeded with the current background color (default: dark navy #12203A). The chosen color is used for the built-in gradient background when no background image is selected. The button's own background updates to preview your selection. Has no visible effect when a background image is loaded.

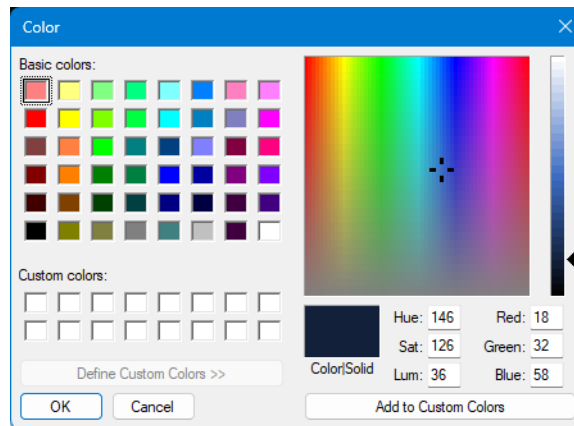

Dark Tint Slider (only active when a template image is loaded)


Controls the opacity of a black overlay drawn on top of the background image before any text or bands are rendered. Slide left for a lighter, more image-visible result; slide right for a darker background that gives better text contrast. The percentage is shown in the label to the right of the slider (0% = no tint, 100% = fully black). Default: approximately 63%.



 The Dark Tint slider only affects the appearance when a background image is loaded. It has no effect on the built-in gradient background.


4.2 Both Bands Color (Accent Color Button)

Opens the color picker and applies the chosen color to both the top accent band and the bottom ID band simultaneously. This is the quickest way to keep both bands matching. After choosing a color all three band color buttons update their display. Individual band colors can then be overridden separately using the Set Color buttons described below.



4.3 Top Accent Band Background Sub-section


The top band runs across the full width of the card at the very top and contains the title text 'PILOT IDENTIFICATION CARD'.



Control	What it Does
Top accent band (checkbox)	Tick this to show the colored band fill behind the title. Untick it to make the band transparent so the title floats over the background. The title text is always drawn regardless of this setting.
Set Color (top band)	Opens the color picker for the top band independently. Choosing a color here does not change the bottom band or the shared Both Bands button.
Opacity slider (top band)	Controls the alpha transparency of the top band fill. 0% is fully transparent (at 0% the checkbox has no visible effect); 100% is fully opaque. Default: 100%. The percentage label updates in real time as you drag.


4.4 Bottom ID Band Background Sub-section

The bottom band spans the full width across the lower portion of the card and contains the three regulatory identification numbers: AMA #, FAA #, and TRUST #.



Control	What it Does
Bottom ID band (checkbox)	Tick this to show the colored band fill behind the ID numbers. Untick it to remove the band so the numbers float over the background. The ID numbers text is always drawn regardless of this setting.
Set Color (bottom band)	Opens the color picker for the bottom band independently. Choosing a color here does not change the top band or the shared Both Bands button.
Opacity slider (bottom band)	Controls the alpha transparency of the bottom band fill. 0% is fully transparent (at 0% the checkbox has no visible effect); 100% is fully opaque. Default: 100%. The percentage label updates in real time as you drag.

4.5 Text Font and Color Sub-section

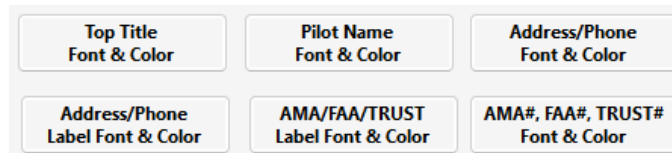

Control	What it Does
Top Title Font & Color (button)	Opens the Font dialog where you can change the font family, size, style, and color of the title text ('PILOT IDENTIFICATION CARD'). Default: Segoe UI 14pt Bold, White.
Pilot Name Font & Color (button)	Opens the Font dialog for the large pilot name text centred below the top band. Default: Segoe UI 22pt Bold, White. This is the most prominent element on the card.
Address / Phone Font & Color (button)	Opens the Font dialog for the three contact lines: Street Address, City/State/ZIP, and Phone. Default: Segoe UI 11pt Regular, White.

Address/Phone Label Font & Color (button)	Opens the Font dialog for the small field labels (Street Address, City/State/Zip) shown in the contact area below the name when the Show contact labels checkbox is ticked. Default: Segoe UI 8pt Regular, White.
AMA/FAA/TRUST Label Font & Color (button)	Opens the Font dialog for the small label text above or to the left of each number ('AMA #:', 'FAA #:', 'TRUST #:') when Show field labels is ticked. Default: Segoe UI 8.5pt Regular, White.
AMA#, FAA#, TRUST # Font & Color (button)	Opens the Font dialog for the AMA, FAA, and TRUST number values. Default: Segoe UI 13pt Bold, White.

4.6 Layout Sub-section

Two check boxes control whether field labels are displayed or not. Two radio buttons control how the three ID numbers are arranged in the bottom band. Only one of the radio buttons can be selected at a time.

☒ Show field labels (Street Address, City/State/Zip, Phone)
☒ Show field labels (AMA #, FAA #, TRUST #)
☒ Stacked (AMA / FAA / TRUST centred, one per line)
☐ 3-column (AMA | FAA | TRUST side by side)

Option	Layout Description
Show contact field labels (checkbox)	When ticked, small labels ('Street Address:', 'City / State / ZIP:', 'Phone:') appear to the left of each contact value. When unticked the values are centered on the card width with no labels.
Show ID field labels (checkbox)	When ticked, a small label ('AMA #:', 'FAA #:', 'TRUST #:') appears above or beside each ID number. When unticked the numbers are centered without labels.
Stacked (default)	AMA #, FAA #, and TRUST # are stacked vertically and centered on the card, one per line. Best when the numbers are long or when you want a clean centered look.
3-column	AMA #, FAA #, and TRUST # are placed side by side in three equal columns across the bottom band, separated by vertical divider lines. Best for shorter numbers that fit comfortably across the width.

5. Right Column — Preview and Instructions

5.1 Preview Panel

Displays the splash card at its actual pixel dimensions: 480 × 272. This is exactly the size that will be written when the image is saved to the radio or PC.



- The preview regenerates automatically when you change almost any control.
- If a background image is selected it is scaled to fill the full 480 × 272 area.
- If the image has a different aspect ratio it will be slightly stretched.
- Placeholder dashes (—) appear for any field that has not been filled in yet.
- The note below the preview box is a reminder that background images are auto-scaled.

5.2 Step-by-Step Instructions Panel

The large text panel below the preview contains a built-in quick-start guide embedded in the program. It describes the recommended workflow for first-time users: connect the radio, auto-detect the SD card, enter pilot info, customize the appearance, and save the splash image.

Step-by-Step Instructions

Step 1: On your radio run the 'PilotInfo' lua script in your 'Tools' menu - enter all 7 fields, then press 'SAVE'.

Step 2: Connect the radio to this PC with a USB data cable.

Step 3: On the radio screen, select 'USB Storage (SD)'.

Step 4: On the 'EdgeTX Pilot Info Screen Generator' click 'Auto-Detect'. If 'Auto-Detect' fails, click 'Browse' and navigate to the SD card drive root on your radio (e.g. E:\ - it may be different on your PC).

Step 5: Optionally choose a background PNG in 'Appearance' and adjust the 'Dark Tint' slider to your preference.

Step 6: Click 'Generate Preview' and review the image.


Step 7: Click 'Save Splash Screen' to save your splash screen.

Step 8: Disconnect the USB cable from the radio, then power off and back on. Your new pilot info splash screen will appear! Adjust the display time of 'splash.png' on your radio.

💡 The instruction panel is for reference only. You do not need to follow the steps in strict order — for example, you can design the appearance before loading pilot data.

6. Action Buttons

Six action buttons (and a notification area) sit below the preview column.

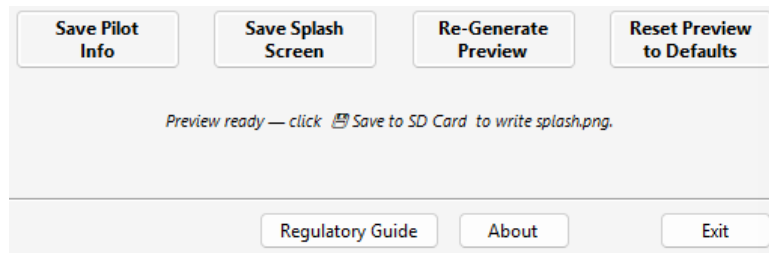

Button	What it Does
Save Pilot Info	Saves the seven pilot data fields to a PilotInfo.txt file on your radio or PC. A Save dialog lets you choose the destination. If saved to the PC the file can then be copied to the radio SD card manually (\\SCRIPTS\\TOOLS\\PilotInfo.txt). An information message after saving gives you the saved location and a three-step copy instructions if the files was saved to your PC.
Save Splash Screen	Saves the currently previewed 480 × 272 PNG image to your radio or PC. A Save dialog lets you choose the destination. If saved to the PC the file can then be copied to the radio SD card manually (\\IMAGES\\splash.png). An information message after saving gives you the saved location and a three-step copy instructions if the files was saved to your PC.
Re-Generate Preview	Forces the preview to re-render using all current settings. Under normal use this button is not needed because controls update the preview automatically. Use it if the preview ever looks out of sync with your settings.
Reset Preview to Defaults	Resets every color, font, opacity slider, checkbox, and radio button back to the factory defaults (EdgeTX navy and blue color scheme, Segoe UI fonts, both bands visible, stacked layout). Pilot data is not cleared. The preview regenerates immediately.
Notification Panel	Displays status messages as you work. Normal messages appear in dark text. Error messages appear in red. Examples include: 'SD card found at E:\\ — loading pilot data...' 'Preview ready — click Save Splash Screen to write splash.png.' 'Pilot data saved to: C:\\Users\\...\\PilotInfo.txt' - Error messages appear in red, for example if a drive is not found or a file cannot be read.
Regulatory Guide	Opens the Regulatory Guide window (see Section 8) which contains links and logos for the FAA, AMA, and local RC clubs.
About	Opens the About window (see Section 9) which displays the program version, author information, and a brief description.
Exit	Closes the program. Any unsaved changes to the design are discarded. Pilot data already saved to files on disk is not affected.

7. Enter Pilot Information Dialog

This dialog opens when you click Enter Pilot Info on the main window. It lets you type all seven data fields without needing a radio connected. Any data already loaded is pre-filled so you can edit existing values rather than retyping everything.


Title bar text: 'Enter Pilot Information — No Radio Required'

Field / Control	Details
Pilot Name	Text box. Maximum 30 characters.
Street Address	Text box. Maximum 50 characters.
City / State / ZIP	Text box. Maximum 50 characters.
Phone	Text box. Shows placeholder text '(xxx) xxx-xxxx'. Maximum 15 characters.
AMA #	Text box. Maximum 10 characters.
FAA #	Text box. Maximum 15 characters.
TRUST #	Text box. Maximum 20 characters.
OK	Saves all seven values back to the main form, closes the dialog, updates the Pilot Data panel, and regenerates the preview automatically.
Cancel	Closes the dialog without saving any changes. All fields return to their state before the dialog was opened.

 The maximum character limits are enforced by the text boxes — you cannot type beyond the limit. These limits match the field widths in PilotInfo.txt on the radio.

8. Regulatory Guide Screen

This screen opens when you click the Regulatory Guide button on the main window. It is an informational reference covering the US regulatory landscape for drone and RC aircraft pilots. It contains three grouped sections.

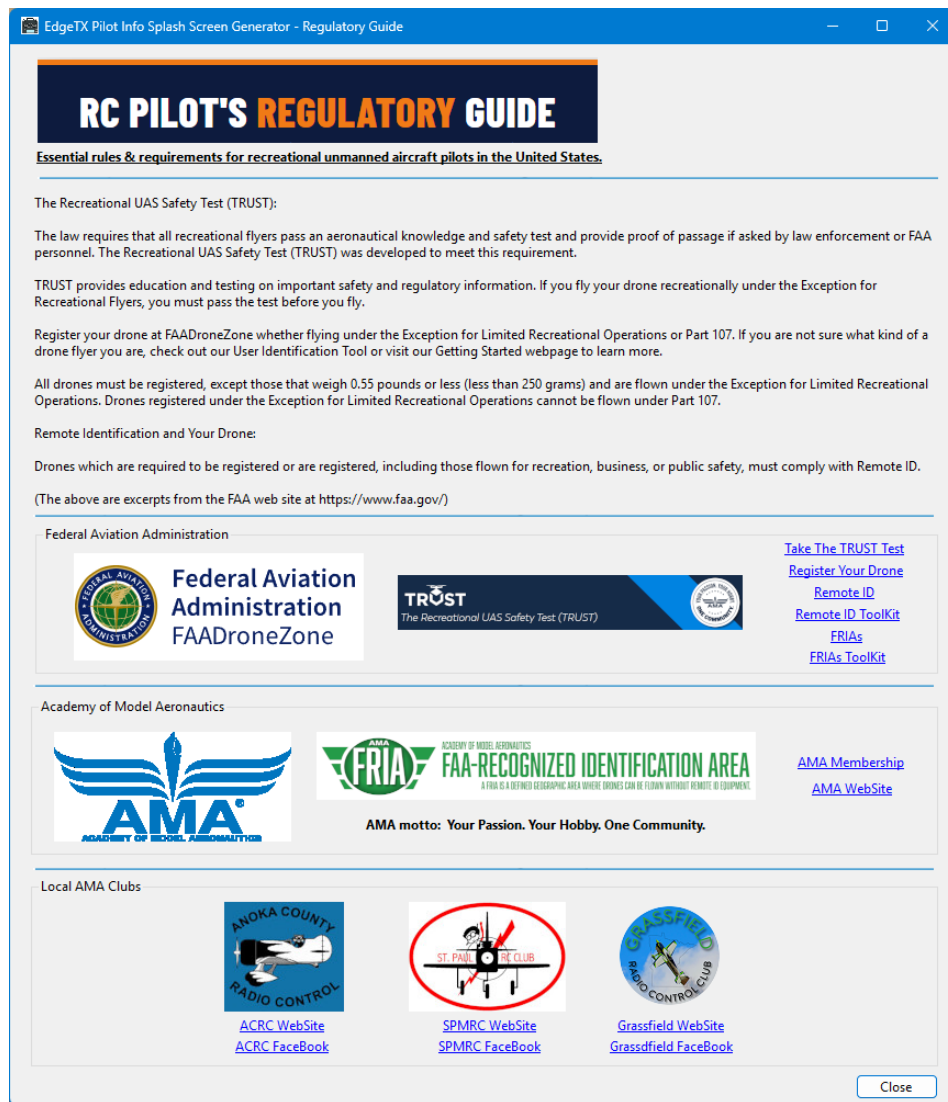

8.1 Essential Rules & Requirements

This sections contains excerpts from the FAA web site at <https://www.faa.gov/>, covering general information and requirements. Always check for the latest information and requirements as this formation may chang at any time.

8.2 Federal Aviation Administration (FAA) Group

Contains the official FAA and TRUST logos as clickable images, plus the following links:

- FAA logo image — click to open the FAA DroneZone registration website (faadronezone-access.faa.gov)
- TRUST logo image — click to open the AMA TRUST test page (modelaircraft.org/trust)
- Take The TRUST Test — direct link to the TRUST test at modelaircraft.org/trust
- Register Your Drone — direct link to FAA DroneZone
- Remote ID — FAA Remote ID information page
- Remote ID ToolKit — FAA Remote ID toolkit PDF/resource page
- FRIAs — FAA information on FAA-Recognized Identification Areas
- FRIAs ToolKit — FAA FRIA toolkit resource page

💡 **TRUST** (The Recreational UAS Safety Test) is required for all recreational drone and RC aircraft pilots in the USA. It takes about 30 minutes to complete. Your TRUST # is what appears in the TRUST # field on your splash card.

8.3 Academy of Model Aeronautics (AMA) Group

Contains the AMA logo image and a FRIA logo image, plus the following links:

- AMA logo image — click to open the AMA website (modelaircraft.org)
- FRIA logo image — click to open the FAA FRIA page
- AMA Membership — link to AMA membership options and sign-up
- AMA WebSite — link to the main AMA website

💡 AMA membership provides liability insurance and supports the hobby. Your AMA # is your member number, typically 6–7 digits.

8.4 Local AMA Clubs Group

Contains logos and links for three AMA-affiliated RC clubs. Each club has a logo image and two links:


Club	Links
Anoka County RC (ACRC)	Logo image (opens website) · ACRC Website link · ACRC Facebook link
St. Paul Model RC (SPMRC)	Logo image (opens translated site) · SPMRC Website link · SPMRC Facebook link
Grassfield RC	Logo image (opens website) · Grassfield Website link · Grassfield Facebook link

8.5 Close Button

Closes the Regulatory Guide window and returns to the main window.

9. About Window

Opens when you click About on the main window. Displays version information, the author's name, the creation date (March 2026), and various libraries used in the creation of this program. A logo image is displayed alongside the text. A Close button dismisses the window.

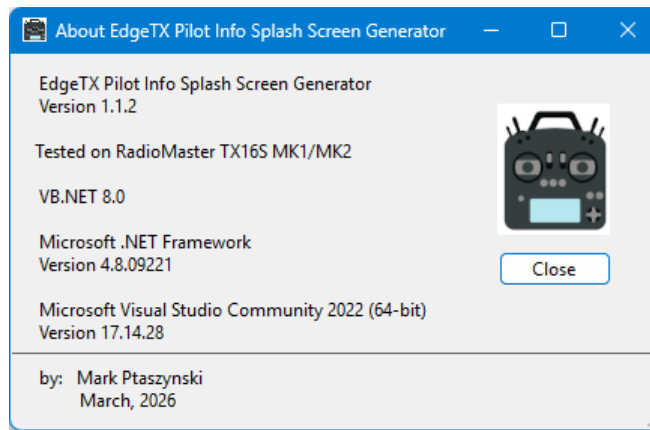

10. Typical Workflows

10.1 First-Time Setup with Radio Connected

1. Power on your radio then connect the radio to your PC via USB cable.
2. On the radio screen select USB Storage (SD).
3. Wait for the SD card drive to appear in Windows.
4. Launch the EdgeTX Pilot Info Splash Screen Generator.
5. Click Auto-Detect. If the SD card is found, pilot data loads automatically and the preview generates.
6. If Auto-Detect fails, click Browse... and navigate to the SD card root drive.
7. Review the Pilot Data panel to confirm the values are correct. If not, click Enter Pilot Info to correct them.
8. Customize the appearance using the controls in Group 3 as described in Section 4.
9. When satisfied with the preview, click Save Splash Screen, choose the destination, and save.
10. Copy the saved splash.png file to IMAGES\ on the SD card if you did not save directly to the card.
11. Safely eject the SD card drive in Windows, then disconnect the USB cable.
12. Power cycle the radio to see your new splash screen.

10.2 Designing Without a Radio

13. Launch the program.
14. Click Enter Pilot Info and fill in all seven fields, then click OK.
15. Customize the appearance using Group 3 controls.
16. Click Save Splash Screen to save the image to your PC.
17. Click Save Pilot Info to save a PilotInfo.txt file to your PC.
18. Later, when you connect the radio, copy splash.png to IMAGES\ and PilotInfo.txt to SCRIPTS\TOOLS\ on the SD card.

10.3 Updating an Existing Splash Screen

19. Open the program and load your previous PilotInfo.txt using Open PilotInfo.Txt or Auto-Detect.

20. Adjust any appearance settings that need updating.
21. Click Save Splash Screen to overwrite the previous file.

11. Splash Card Layout Reference

The 480 × 272 canvas is divided into four horizontal zones:

Y Start	Y End	Zone Content
0 px	44 px	Top Accent Band — 'PILOT IDENTIFICATION CARD' title, centered horizontally.
44 px	104 px	Name Area — Pilot name in large bold font, centered horizontally.
104 px	196 px	Contact Area — Street Address, City/State/ZIP, and Phone on three lines. Labels optional.
196 px	272 px	Bottom ID Band — AMA #, FAA #, and TRUST # in stacked or 3-column layout.

 The 480 × 272 resolution matches the TX16S MK I and MK II color screens. If you own a TX16S MK III or MAX (800 × 480 screen) or a smaller radio, the splash.png dimensions in the source code would need to be adjusted. (future project)

12. Tips and Troubleshooting

12.1 The radio SD card is not found by Auto-Detect

- Ensure you selected USB Storage (SD) on the radio screen, not USB MIDI or any other mode.
- Give Windows 10–15 seconds to register the new drive before clicking Auto-Detect.
- Open Windows Explorer and confirm the drive letter appears there. If it does, try Browse... and select that drive letter manually.
- Try a different USB cable or USB port if the drive never appears.

12.2 PilotInfo.txt not found on the SD card

- The file is only created after the PilotInfo.lua Lua script has been run at least once on the radio using the Tools menu.
- If you have not run the Lua script yet, use Enter Pilot Info or Open PilotInfo.Txt to load data without the file.

12.3 Text is clipped or overflows in the preview

- Long pilot names or addresses and fonts too large may not fit. Try a slightly smaller font size using the Pilot Name Font or Address/Phone Text buttons.

- The maximum character limits (30 for name, 50 for address/city) are set to prevent overflow, but very wide characters in certain fonts may still not fit.

12.4 The background image looks very dark

- Reduce the Dark Tint slider in the Appearance panel. Drag it left to reduce the tint percentage.
- The tint is intentional — it ensures white text is always readable over any photograph. A completely dark tint (100%) is equivalent to a solid black background.

12.5 The preview does not refresh after a change

- Click Re-Generate Preview to force a manual refresh.
- If the problem persists, check the Status bar for an error message.

12.6 Save Splash Screen button is disabled

- The button becomes enabled only after at least one successful preview render. Click Re-Generate Preview first.

12.7 Colors look different on the radio screen vs. the preview

- The radio LCD may render colors slightly differently than a PC monitor due to its display technology and color profile.
- For best results choose colors that have enough contrast to be readable in bright sunlight at the flying field.

13. US Regulatory Quick Reference

All recreational drone and RC aircraft 250 grams or over require FAA registration and TRUST certificate for the pilot in the US. AMA membership is recommended for insurance.

Requirement	What It Is	Where to Get It
AMA #	AMA membership number. Provides liability insurance and FAA recognition.	modelaircraft.org/membership
FAA #	FAA drone registration number. Required for aircraft over 0.55 lbs (250g). Fee applies.	faadronezone-access.faa.gov
TRUST #	The Recreational UAS Safety Test certificate number. Free, online, about 30 minutes.	modelaircraft.org/trust

⚠ Regulations change. Always check the FAA website for the most current requirements before flying. The information above is provided as a convenience and may not reflect recent rule changes.

Appendix — Compatible Radio Models

The program generates a 480 × 272 pixel PNG by default. This matches the following radios:

- RadioMaster TX16S MK I
- RadioMaster TX16S MK II
- RadioMaster TX16S MK II MAX
- RadioMaster Boxer
- RadioMaster Pocket
- Jumper T16
- Jumper T18

Radios with different screen resolutions (such as the TX16S MK III / MAX at 800 × 480) are not directly supported by this version of the program may not function correctly without modifying the program.