



Charging and Protection Circuit

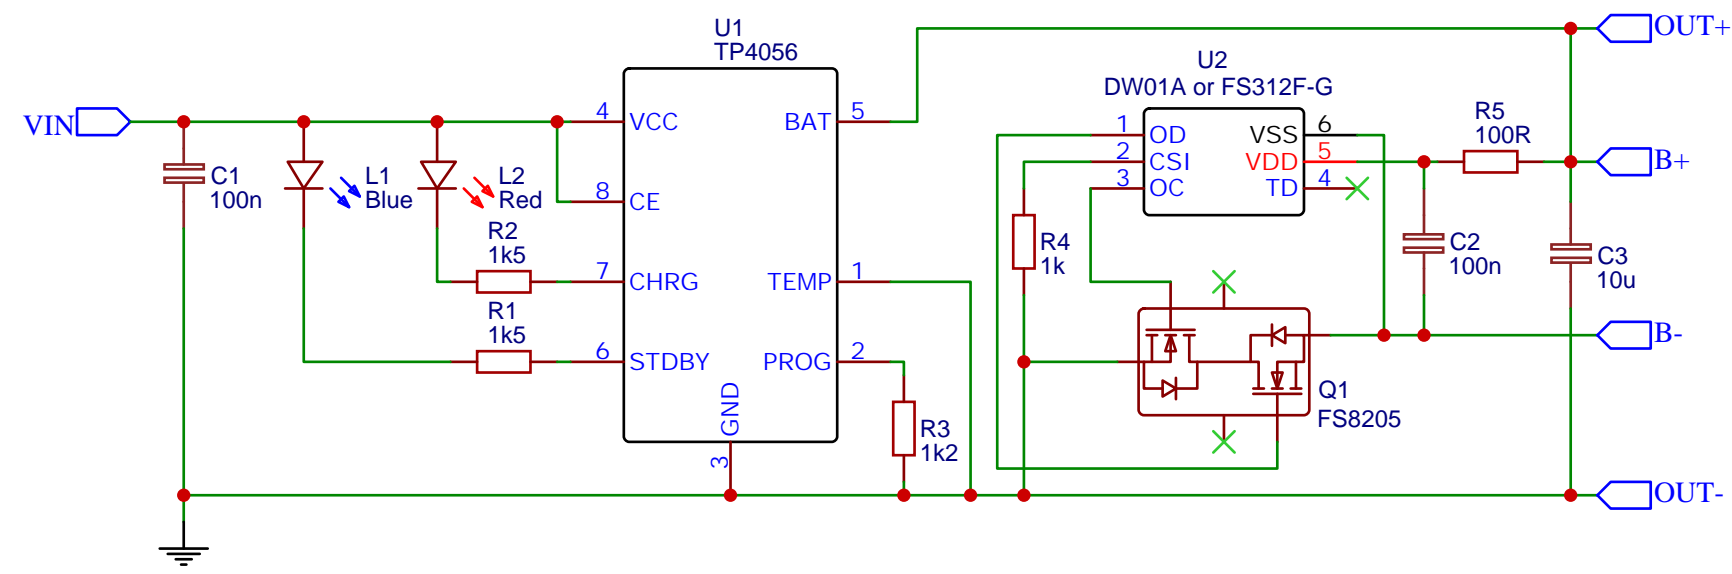

Connectors

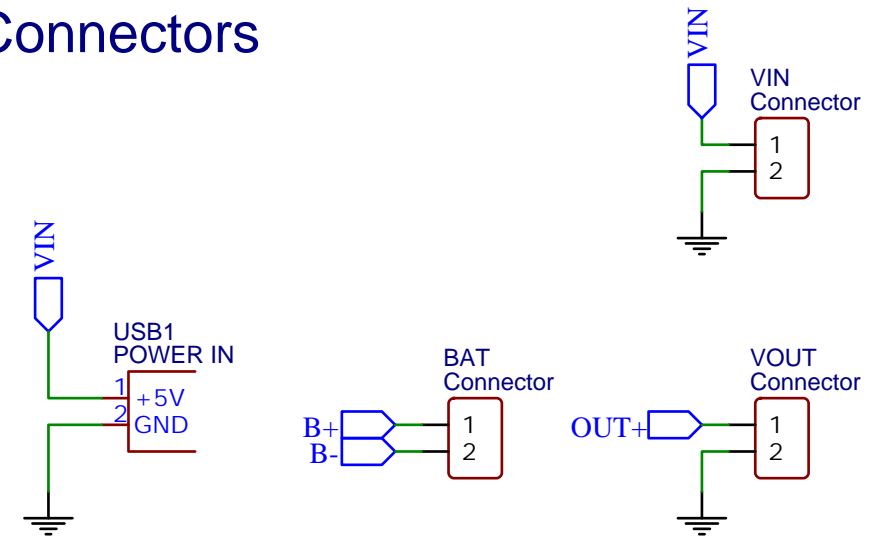


Set charging current by selecting proper R3

1k2	-	1000mA
1k5	-	780mA
2k	-	580mA
4k	-	300mA

$$I = \frac{1200V}{R3}$$

Set over discharge protection by selecting U2

DW01A	-	2.4V
FS312F-G	-	2.9V



TITLE: LiPo Charger & Protector		REV: 1.0
EasyEDA	Company: wagiminators	Sheet: 1/1
	Date: 2019-03-23	Drawn By: Stefan Wagner