

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/324049066>

# Monitoring of Large-Area IoT Sensors Using a LoRa Wireless Mesh Network System: Design and Evaluation

Article in IEEE Transactions on Instrumentation and Measurement · March 2018

DOI: 10.1109/TIM.2018.2814082

CITATIONS

111

READS

1,474

2 authors, including:



Huang Chen Warren Lee

National Chung Cheng University

39 PUBLICATIONS 389 CITATIONS

SEE PROFILE

# Monitoring of Large-Area IoT Sensors using a LoRa Wireless Mesh Network System: Design and Evaluation

Huang-Chen Lee, *Senior Member, IEEE*; Kai-Hsiang Ke

**Abstract**—Although many techniques exist to transfer data from the widely distributed sensors that make up the internet of things (IoT; e.g., using 3G/4G networks or cables), these methods are associated with prohibitively high costs, making them impractical for real-life applications. Recently, several emerging wireless technologies have been proposed to provide long-range communication for IoT sensors. Among these, LoRa has been examined for long-range performance. Although LoRa shows good performance for long-range transmission in the countryside, its radio signals can be attenuated over distance and buildings, trees, and other radio signal sources may interfere with the signals. Our observations show that in urban areas, LoRa requires dense deployment of LoRa gateways to ensure that indoor LoRa devices can successfully transfer data back to remote gateways. Wireless mesh networking is a solution for increasing communication range and packet delivery ratio without the need to install additional LoRa gateways. This study presents a LoRa mesh networking system for large-area monitoring of IoT applications. We deployed 19 LoRa mesh networking devices over an  $800\text{m} \times 600\text{m}$  area on our university campus and installed a gateway that collected data at 1-minute intervals. The proposed LoRa mesh networking system achieved an average 88.49% packet delivery ratio, whereas the star-network topology used by LoRa achieved only 58.7% under the same settings. To our knowledge, this is the first academic study discussing LoRa mesh networking in detail and evaluating its performance via real experiments.

**Index Terms**—LoRa, PHY, wireless mesh network, Internet of Things, IoT, LoRaWAN, long-range wireless area network, multi-hop, data collection, sensor.

## I. INTRODUCTION

The internet of things (IoT) aims to enable conventional sensing devices to communicate with other devices and to cooperatively provide intelligent service. For example, IoT can be used to monitor air quality in a city to provide real-time information and warnings to inhabitants as well as to control air pollution [1],[2]. Another example is monitoring of solar panels [3]; smart panels can be installed on the roofs of several buildings to optimize their collective efficiency. As the number of sensors in an IoT system grows, however, the issue of how to transfer data among those devices becomes increasingly complex, and data transfer needs must be balanced with operating considerations and infrastructure costs. In contrast to existing short-range wireless communication technologies currently used for indoor IoT sensors [4], several techniques have been proposed for providing long-range and outdoor wireless communication, such as Sigfox [5], LoRa/LoRaWAN [6], NB-IoT, and LTE-M [7]. Among these, LoRaWAN, which is based on LoRa physical layer (PHY) [8] implementation, is a network standard for telecom operators. It allows them to provide network service and enable devices to wirelessly

transfer data over long distances to remote gateways. LoRaWAN uses a star-network topology for communication between LoRa gateways and IoT devices; only one hop is allowed between a gateway and a LoRa device. Some experiments have shown that a LoRa device can transmit data 15 km in an open area, which is sufficient for most current long-range IoT applications. However, indoor LoRa devices may still be unable to communicate wirelessly with a nearby gateway, due to obstacles between sensors, which can attenuate wireless signal strength and result in data losses and communication errors.

Increasing the spreading factor (SF) of LoRa PHY to 12 can significantly extend the communication range by increasing the receiver sensitivity [9], but the drawback is that doing so can lower the data throughput rate and cause more severe data collision due to the longer times required for transmission. This issue can be exacerbated when a large number of high-density LoRa devices send wireless data and receive acknowledgements at the same time. Some studies [11] have shown that these conditions can cause the packet delivery ratio (PDR) to drop significantly. To solve this issue, telecom operators need to deploy more LoRaWAN gateways to increase the probability of receiving the wireless data from the LoRaWAN devices; this solution increases the cost of the network infrastructure.

Wireless mesh networks are one feasible solution to increase the communication performance of devices in indoor networks. This approach allows all LoRa devices on the network to act as routers and relay data from other devices. In this study, which is based on a previous study [10], we explore the use of wireless mesh networks based on LoRa PHY with the aim of collecting reliable data on the performance of this technique.

Fig. 1 shows a snapshot of the network topology of the proposed LoRa mesh network on our university campus. In this figure, GW denotes the gateway that manages the network and collects data from the IoT sensors, which are indicated by circles with numbers. Nineteen sensors were installed in different buildings across the  $600\text{m} \times 800\text{m}$  university campus. The yellow lines connecting the circles indicate the topological paths generated by the data being relayed to the gateways at the moment of the snapshot.

The example in Fig. 1 shows that data generated by sensor 4 were relayed by sensors 1 and 3 before finally arriving at the gateway. Note that the network topology is formed automatically and may change due to environmental changes. Each sensor decides locally which sensor is the best one to help relay its data. Using this approach, a sensor that cannot directly communicate with the gateway may find other sensors to help it to transfer data to the gateway, thereby raising the packet delivery performance (PDR) of each sensor.

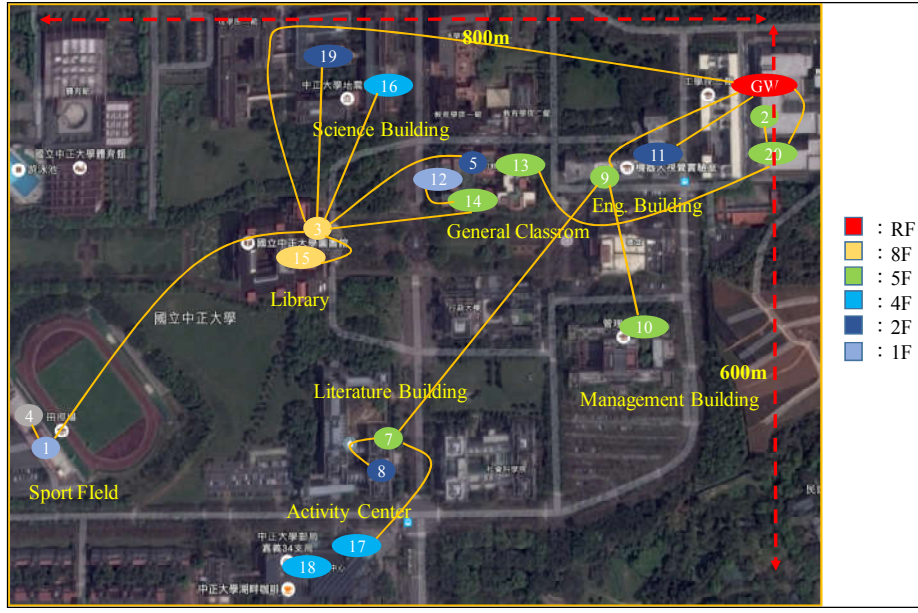


Fig. 1. A network topology snapshot of the LoRa mesh network devices distributed around a 600m  $\times$  800m university campus.

We analyzed the communication performance of the wireless mesh network and the result shows that mesh networks can deliver better performance without incurring the cost of installing additional gateways. We also analyzed the performance tradeoffs of different configurations.

Briefly, the contributions of this study are as follows:

1. Whereas other studies [11]–[16] have continued to focus on analysis of the standard LoRaWAN protocols, discussing how to alleviate the issues caused by signal attenuation and collision in high-density wireless devices, this study proposes a LoRa mesh networking system and evaluates its performance. We thereby identify a new approach for fulfilling the practical need to collect data from IoT sensors scattered over a campus-sized area without using expensive 3G/4G networks or laying cables for data transmission.
2. This study is one of the few works to empirically evaluate the performance of LoRa mesh networking. The evaluation illustrates that LoRa signals can be attenuated or blocked by buildings and other obstacles and that the proposed design can mitigate this problem by using mesh networking to increase PDR without deploying additional gateways.
3. The proposed LoRa mesh network module can be integrated with other IoT applications to help collect data from distributed sensors, bypassing complex data transmission and collection issues. Users do not need to know how to build a network or route the data because all the communication protocols are contained in the module. This significantly simplifies the use of long-range wireless communication and facilitates IoT applications over large regions.

## II. RELATED WORK AND DESIGN GOALS

Several long-range wireless communication technologies have recently been proposed. LoRa was one of the first such

technologies to become commercially available; therefore, many academic studies have been devoted to discussing and analyzing LoRa's performance. LoRa (specifically, LoRa PHY) is a long-range wireless transmission technique, and LoRaWAN is a networking design that enables telecom operators to provide subscription services based on LoRa PHY. LoRa PHY is a proprietary chirp spread spectrum (CSS) scheme that uses the sub-1 GHz wireless frequency band. It features extremely high sensitivity, down to  $-137$  dBm, and a maximal link budget of up to 157 dB [23]. Several parameters of LoRa PHY can be adjusted for different performance goals, including power level, SF, bandwidth (BW), and coding rate (CR). Changes in power level, SF, BW, and CR involve multiple tradeoffs among transmission time on air (data throughput), power consumption, and transmission range, and different tradeoffs result in varying receiver sensitivities, transmission time on air, and signal-to-noise ratios (SNRs).

In a study of how SF affects receiver sensitivity in LoRa and LoRaWAN [13], researchers used a Semtech SX1276 Mbed shield as the end device and a Cisco 910 industrial router as the gateway. The BW setting of the LoRa device was 125 kHz, the CR was 4/5, and the power output level was set to the minimum, 2 dBm, with a 3-dBi antenna. A packet transmission test showed that the receiver sensitivity (the minimum signal strength needed to decode the incoming packet correctly) was  $-123$  dBm with an SF of 7. This improved to  $-135$  dBm when the SF was increased to 12, that is, larger SF resulted in better receiver sensitivity and longer transmission range. The researchers also tested the transmission range under different SF settings in an outdoor, urban area; the results indicated that, with an SF of 12, the transmission range could reach 3500 m with a 40% PDR; the PDR collapsed to 0% at SF 7 or 9. However, the larger SF also resulted in slow data throughput. The researchers tested the throughput of LoRaWAN at BW = 125 kHz, and the results illustrated that the throughput was about 780 bytes/s at an SF of 7 and dropped to only 28 bytes/s at

an SF of 12. This shows that the channel data capacity was limited if the SF was large.

The design and drawbacks of LoRaWAN are similar to those of the ALOHA [17] protocol, as there is no mechanism to arbitrate access to a shared wireless frequency. Transmissions by more than one transmitter at the same time may result in data collision. LoRaWAN uses this approach to simplify the design of the media access control (MAC) layer for battery-powered LoRa device, which is required for saving valuable energy, thus prolonging its lifetime. Therefore, a LoRa device can transmit data to the gateway at any time, causing significant packet collision if many devices transmit signal simultaneously [11].

To test long-range outdoor transmission, Petäjärvi and colleagues [14] installed a LoRa node on the roof rack of a car and another on the radio mast of a boat. They tested the communication range of their system using a frequency of 868 MHz and an output power level of 14 dBm, with an SF of 12. They observed that the maximal communication range in an open area was more than 15 km on land and 30 km over water. However, this good performance is mainly due to lack of obstructions and use of only a few LoRa devices transmitting data on the same frequency simultaneously.

When a gateway needs to serve a large number of LoRa devices at the same time, the capacity of the uplink channel available to a LoRaWAN node strongly depends on the distance from the base station [15]. With so many devices, the capacity could drop to a mere 100 bits/s on average, especially for LoRa channels with high SF and for the most distant nodes. Additionally, in LoRaWAN, there is no clear channel assessment (CCA) mechanism, which increases the probability of packet collision. The PDR can drop to just 25% when node density is very high [11]. Deploying additional gateways can increase the performance in terms of receiving data, but at added cost. Directional antennas have also been considered as a means of alleviating interference in LoRa networks [12], but only simulations have been evaluated to date. The time-related performance of LoRa and LoRaWAN was also evaluated [16] to determine the uncertainty of schedule to transmission and long-term clock stability.

One commercial device, from NiceRF [18] can supposedly help form a LoRa mesh network, but very limited information is provided in its datasheet, including information about how to form a mesh network, how to relay data, and the communication performance of the device. Page 8 of the device datasheet [18] indicates that it is simply based on repeating the received data in the same network ID. Therefore, this approach is similar to the ad hoc on-demand distance vector routing (AODV) method of Zigbee and the managed flood method of Bluetooth 5.0 mesh networks [19]. This approach should work when network traffic is low, but it may be difficult to maintain communication quality as traffic increases, and it may not be able to manage the network topology. In contrast, the industrial application standard time-slotted channel hopping (TSCH) wireless mesh network systems such as WirelessHART [20] and the ISA100.11a [21] standard both support graph routing as well as source routing; both standards are based on IEEE 802.15.4. In the architecture of WirelessHART, a special computer Network Manager manages the network topology and communication schedule. It also manages communication quality and adapts to different types of traffic and changes in its

environment. ISA100.11a implements its routing mechanism in a data link layer for data forwarding based on routing graphs, which are created by the System Manager in the ISA100.11a architecture. Both WirelessHART and ISA100.11a can provide better communication reliability as the network is centrally managed, but they are not specifically designed for monitoring large areas like a university campus. Therefore, it may be inappropriate to make a direct comparison between these standards and the design proposed here.

The conclusion based on these previous studies, focusing on evaluating the performance of LoRa/LoRaWAN, is clear: to serve more high-density and indoor LoRa devices requires deployment of more LoRa gateways. However, this approach defeats the original purpose of LoRa/LoRaWAN, that is, to provide an inexpensive and efficient IoT communication service. Another issue is that users may need to pay telecom operators for subscriptions to a LoRaWAN service, and, even as subscribers, they might not receive good communication quality if the operator's gateway is far away.

In response to these issues, this study takes a different approach by building a wireless mesh network system based on LoRa PHY rather than LoRaWAN. The proposed design can collect data from IoT sensors distributed across a large region, such as a tall building or a university campus, using only a single LoRa gateway. The design allows all LoRa devices to act as data routers, thereby enhancing the communication performance of indoor devices that may have difficulty communicating with the gateway directly. The design goals of the proposed system are as follows:

1. The campus-wide wireless mesh network must be able to collect data from IoT sensors, even indoor sensors. The network should be able to function in environments with physical obstacles such as buildings, and it should provide automatic routing of data back to the gateway. This is very important if nonprofessional users are to manage the system.
2. The deployment procedure for the IoT sensor should not require any prior configuration. Users should be able to simply install their IoT sensors without considering communication issues. Unlike LoRaWAN, there should be no need to add gateways to increase performance; only one gateway should be needed.
3. The wireless mesh network must be manageable. Information about the network routing path, data delivery ratio, received signal strength (RSS), and SNR of each path should be collected and displayed on the gateway. This information should help the manager understand the status of the system and correct communication problems in case of weak data links.
4. The design should be empirically verified in an outdoor environment to ensure that the system works in practical scenarios.

These goals guided the design of our system, which is described in the next section.

### III. SYSTEM ARCHITECTURE AND DESIGN

In this section, we describe the design of the system.

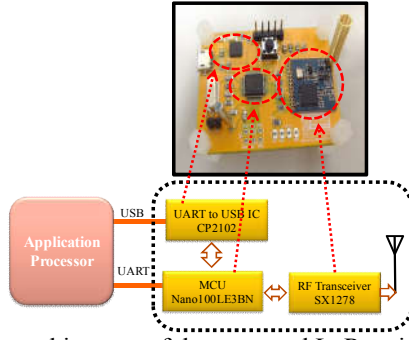


Fig. 2. The architecture of the proposed LoRa wireless mesh network module.

The basic design of the LoRa wireless mesh network module is shown in Fig. 2. It is based on a Nuvoton Nano100LE3BN [22], an ARM M0 microprocessor, and a Semtech SX1278 [23] LoRa RF 430 MHz transceiver with a 1.9-dBi gain helical antenna. The current design focuses on wireless communication performance rather than, for instance, low power requirements; therefore, all nodes and the gateway are wall-powered via 5V USB adapters.

The microprocessor communicates with the LoRa transceiver via a serial peripheral interface (SPI) to send and receive data wirelessly. The microprocessor is also integrated with a USB-UART converter Silicon Lab CP2102 to convert UART to USB for communicating with the application processor. The nodes and the gateway use the same hardware platform. All mesh networking protocols are run on an ARM M0 microprocessor. This module can act as a radio module, similar to XBee [12], to accept AT-commands from an application processor with USB or UART. An example of an AT-command list can be found in [24]; therefore, the application processor can use this module as a network interface, so users do not need to worry about how the wireless network is formed.

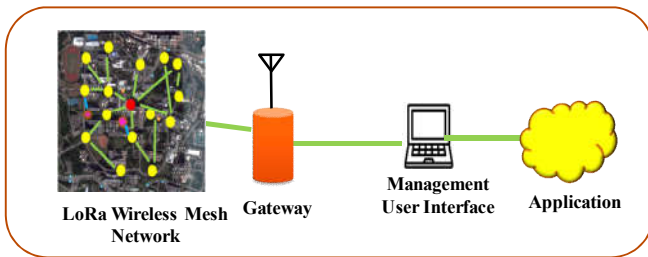


Fig. 3. System architecture.

Fig. 3 illustrates the architecture of the proposed LoRa wireless mesh network system. The integration of the IoT sensors with the LoRa wireless mesh network module forms the mesh network automatically. The gateway of this system will sequentially collect the data accumulated in the IoT sensors. The gateway outputs the data to the management user interface, displaying the status of the wireless mesh network and showing the data in the IoT sensors. The user's application can read the data from the user interface, which is useful in applications such as electricity/water-meter monitoring or solar panel management.

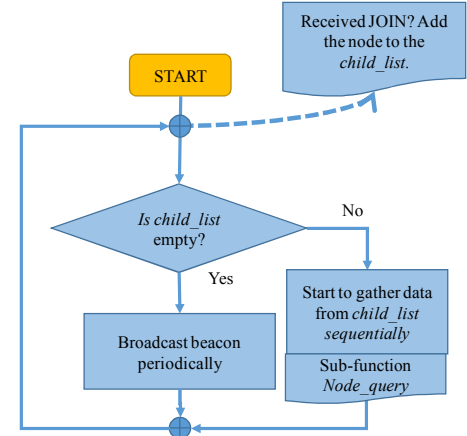


Fig. 4. Basic flowchart of a gateway.

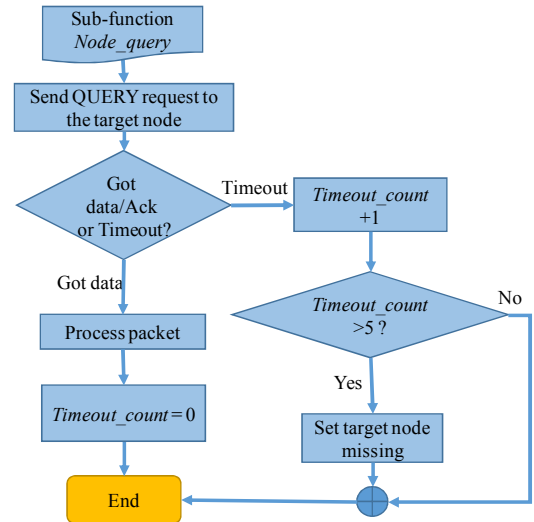


Fig. 5. Flowchart of sub-function *node\_query* of a gateway.

We introduce a network formation scenario, schematically shown in Fig. 4. *Child\_list* is a data structure that is initially empty. It is held by the *gateway* and will store the list of LoRa nodes joined to its network. In the initial stage, the gateway will broadcast beacons periodically (i.e., every 60 seconds) inviting other *LoRa nodes* (hereafter called *nodes*) to join its network, as shown in the flowchart. A LoRa node hearing the beacon from the nearby gateway may join this network by sending a JOIN request and setting the gateway as its parent.

Fig. 4 shows how the gateway adds the joined node to its *child\_list* and then begins to gather data by calling the sub-function *node\_query*, as illustrated in Fig. 5. This function sends a QUERY request to the target node to gather data from the node in the *child\_list*. If the QUERY request times out, then the function adds one to the counter *timeout\_count*, marking the target node as missing if *timeout\_count* > 5. The gateway will remove the missing node from its *child\_list* and will not attempt to gather data from it in the next node query. Once the gateway has the first child, and *child\_list* is not empty, the gateway will stop broadcasting the periodical beacon. Instead, the gateway will use the data packets sent to its children as beacons for notifying other nodes to join it if necessary, as shown in Fig. 4.



If a node can hear the beacon from the gateway, it must be able to overhear the data packet from the same gateway. So this approach saves time by eliminating unnecessary beacon broadcasting by the gateway.

As shown in Fig. 6, a power-on node  $m$  will listen for a *beacon* from a nearby gateway or will overhear a data packet (functioning as a beacon for  $m$ ) from a nearby gateway or node. If  $m$  has not yet joined the network, it will choose a suitable network parent (either the gateway or a node). The choice of a suitable network parent is based on multiple factors. In this design, the node stores the received signal strength indicator (e.g., RSSI) of recently received beacons/packets from different gateways or nodes in a candidate list. The node's hop-count distance to the gateway is also recorded in the list. The node  $m$  selects the best parent from the list based on its own subjective decision, i.e., the node with the strongest RSSI and with the smallest hop-count distance to the gateway in the present moment. The reason behind this is that a node will try to find a parent that is the closest to the gateway but that also has good communication quality.

Therefore, considering buildings, obstacles, interferences in the field, and the location of the node, that is, whether it is indoors or outdoors or on the first floor or the top floor, the geographically nearest node based on the two-dimensional top-down view is not always the best parent candidate. The various methods for deciding on a suitable parent candidate are not discussed deeply in this manuscript. In the practical implementation, the gateway has a global-view topological map of the mesh network after the network is formed, and it can force assignment of a new parent to a node according to its comprehensive information. This approach is reasonable, as it is very difficult for a node to find the best parent with its own local-view and limited knowledge.

After the node  $m$  decides on a suitable parent, it sends a JOIN request and waits for confirmation before joining the network. If the node  $m$  receives a confirmation, then it will join the network. Afterward, if node  $m$  receives a data or command packet, it will process this packet and respond as appropriate by calling the sub-function *process\_packet*.

As shown in Fig. 7, *process\_packet* determines what type of packet has been received and processes the packet as appropriate. If a node  $n$  receives a JOIN request from another node, then  $n$  may accept or reject this request based on its current status (for example,  $n$  may reject the JOIN request if  $n$  already has too many children) and respond accordingly. If the incoming packet is a data or command packet, and if the packet destination is  $n$  itself, then  $n$  will process the packet and respond accordingly; for example,  $n$  will respond to a data request or command from the GW. If the destination is not  $n$  itself but the packet source is  $n$ 's parent or child, then  $n$  will help to relay this packet to the destination; otherwise, it will drop the packet.

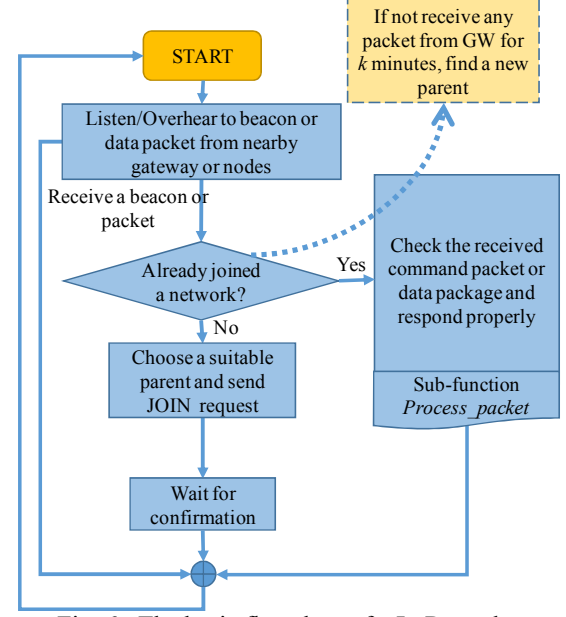


Fig. 6. The basic flowchart of a LoRa node.

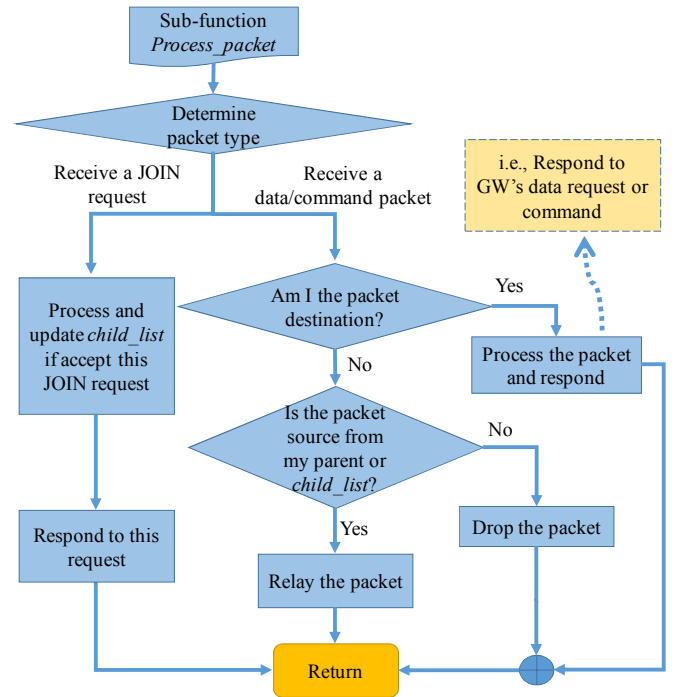


Fig. 7. The flowchart of the sub-function *process\_packet* of a LoRa node.

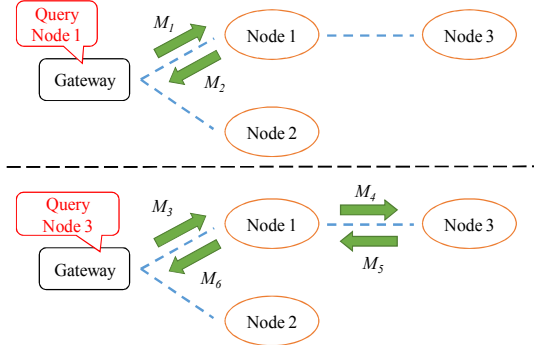


Fig. 8. Procedure for a node joining the network and querying the gateway.

We present an example scenario, illustrated in Fig. 8, in which node 1 joins the network and sets the gateway as its parent. The gateway adds node 1 to its *child\_list*. Then, the gateway queries nodes in its *child\_list* for data. In this design, the gateway initiates the query procedure. As shown in Fig. 8, the gateway sends query  $M_1$  to node 1, and node 1 reports its data  $M_2$  back to the gateway. Meanwhile, the nearby node 3 overhears  $M_2$ . Note that  $M_2$  for node 3 is a beacon. Thus, node 3 joins the network and sets node 1 as its parent. Node 1 notifies the gateway of the newly joined node 3. The mesh network is formed and all nodes are connected to the gateway based on the procedure. Therefore, in the next query round, the gateway will query node 3 to gather its data using the message sequence  $M_3$ ,  $M_4$ ,  $M_5$ , and  $M_6$ . Based on this sequence, all the nodes can join this multi-hop wireless mesh network, and the gateway can query all the nodes.

In addition, because the gateway has a global-view topological map of the mesh network and has all the routing path information, in this design, the node can ask the gateway for the routing path to another node; therefore, the routing is implemented. However, in the real-world application, in most cases, the gateway will initiate the query procedure for collecting data from the nodes; direct communication between nodes is used less frequently.

#### IV. EVALUATION AND DISCUSSION

We evaluated the proposed system to verify the applicability of the design. In this section, we describe and discuss our evaluation.

##### A. Preliminary Experiments

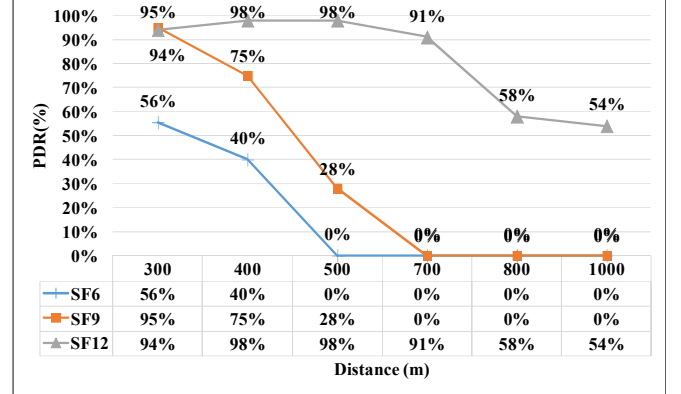


Fig. 9. PDR at different distances under different SF settings.

First, we tested the proposed LoRa module at different transmission distances by setting the output power level to 20 dBm and the BW to 125 kHz. Two nodes were placed 1 m above the ground. The transmitter sends 200 packets to the receiver, which is placed in the transmitter's line of sight on a street in an urban area, with moving and stationary obstacles (i.e., pedestrians, cars, and buildings) between them. This experiment tested the PDR of two nodes under different SF settings, including SF = 6, 9, and 12. According to the design of the LoRa PHY layer, larger SF paired with higher receiver sensitivity should result in higher PDR. Fig. 9 shows that SF = 12 yielded the best PDR among all the tested distances. With SF = 6, the PDR was 56% at 300 m and dropped to 0% at 500 m. With SF = 9, the PDR was 98% at 500 m, observably better than SF = 6. Even when the distance was extended to 1000 m, the PDR remained at 54%. This experiment confirmed that large SF can increase the transmission range and data delivery performance.

##### B. In-Building Range Test

In order to further investigate the communication performance of the designed LoRa module, we conducted an experiment in a five-story classroom building on our university campus to test how the LoRa signal travelled vertically across the building's floors. The receiver node was installed on the fifth floor (5F), the top floor of this building, and transmitter nodes were installed on 1F, 2F, 3F, 4F, and 5F. For two nodes, we used the same test procedure as in the previous test. Different LoRa PHY settings were tested, including various SF and BW values. The RSSI, PDR, and time on air were collected for evaluation.

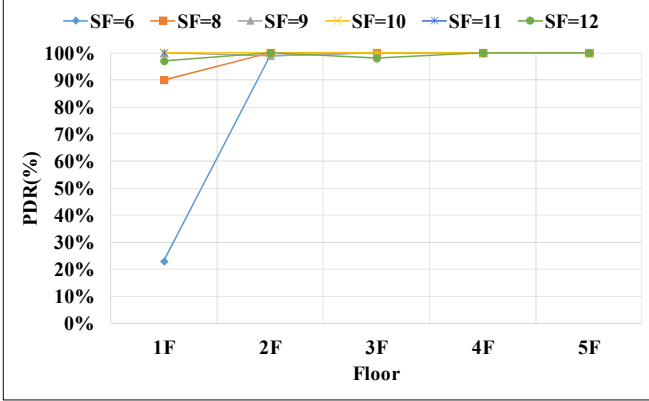


Fig. 10. PDR on different floors under different SF settings (BW = 250 kHz).

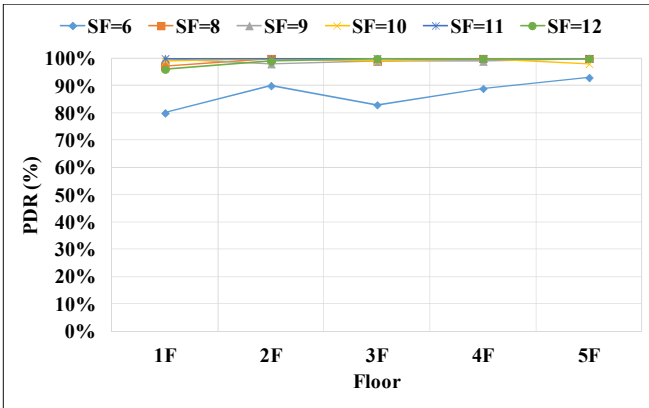


Fig. 11. PDR on different floors under different SF settings (BW = 125 kHz).

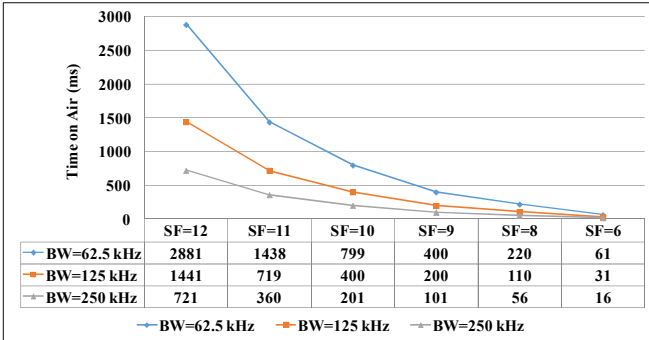


Fig. 12. Time on air (in ms) under different BW and SF settings.

Fig. 10 shows the PDR at BW = 250 kHz. When the transmitter was placed on 1F, the LoRa radio signal had to travel through four concrete stories to 5F. Therefore, all the PDRs for 1F are low compared with those of the other floors. For the LoRa transceiver, the larger bandwidth (BW) can increase the PHY rate and reduce the time on air, but it also lowers the PDR as the output power is distributed across a larger bandwidth. Setting SF = 6 further lowers the receiver sensitivity and causes even lower PDR. As a result, the PDRs at SF = 6 are the lowest among the SF settings in this experiment.

Fig. 11 shows the PDRs at BW = 125 kHz. All PDRs at BW = 125 kHz were higher than the PDRs at BW = 250 kHz,

particularly at SF = 6 on 1F. However, in both tests, the PDR of SF = 6 was still low compared with PDR at other SF settings. While the PDRs were all almost 100% at SF settings from 7 to 12 (Fig. 11), the PDRs with SF = 6 ranged from 80% to 93%. We conclude that, if we want to increase the PDR, we should set the SF to a larger number and the BW to a smaller number.

Fig. 12 illustrates how *time on air* (the amount of time needed to transmit data wirelessly) was affected by different BW and SF settings for a packet with a 20-byte payload. The time on air is measured by using the GPIO interrupt of the node's microprocessor; the GPIO interrupt was triggered when the LoRa transceiver to send data and receiving the notification of data sent out from the transceiver, and to measure the time interval between two interrupt triggering with timer. As the SPI between the microprocessor and the LoRa transceiver is SPI, and the time measurement is not very accurate, some uncertainties may be introduced, varying estimations of the time on air. However, this might be acceptable as this result is for understanding how SF and BW affect the time on air. We can see that larger SF and smaller BW resulted in longer time on air. The time on air was only 16ms for SF = 6 and BW = 250 kHz, but it increased to 2881 ms for SF = 12 and BW = 62.5 kHz. Therefore, although larger SF and smaller BW settings increase the PDR, these settings also significantly prolong the time on air and may cause serious packet collision if multiple transmitters send data simultaneously. We can compare this drawback to single-hop LoRaWAN systems, which suffer from low PDR with a high density of LoRa devices, as mentioned in [13]. In the proposed system, the GW initiates all communications and queries devices. Therefore, the LoRa node cannot actively send out data, thus avoiding packet collision at the cost of long transmission delays. Although this delay is a drawback, in the context of IoT data collecting, this approach prevents packet collision without introducing complications into the simplified design.

### C. Campus-Scale Experiment: 19 LoRa Nodes on a University Campus

In the campus-scale experiment, we placed 19 LoRa nodes (originally, we installed 20 nodes, but node 6 was lost during the experiment), distributed in an 800m×600m area of our university campus. We allowed the gateway to collect data at 1-minute intervals for 8 days. In this setting, for each node the maximum latency is 60 seconds, depending on when the node is queried by the gateway. Each node is queried by the gateway one time every minute, so it will be queried 60 (minutes) × 24 (hours) × 8 (days) = 11520 times (packets) if a node is connected to the network during all 8 days. The LoRa PHY parameters were set to SF = 12 and BW = 250 kHz. In this experiment, we focused only on communication performance; the content of data packets was not considered. The nodes form a wireless mesh network automatically and the gateway collects data from these nodes periodically based on a multi-hop network.

Referring back to the snapshot of the network topology shown in Fig. 1, the color of the circles with node numbers indicates the floor of the building on which each node was installed (e.g., 1F or RF). Nodes at 1F, like node 12, need the



help of other nodes to relay data to the gateway (denoted by GW in Fig. 1) because they cannot communicate with the GW directly. In this case, node 14 at 5F and node 3 at 8F assisted node 12 in relaying its data to the GW (the path is denoted by 12-14-3-GW).



Fig. 13. Another network topology snapshot of the LoRa mesh network devices.

Another snapshot of the network topology was taken and is shown in Fig. 13. In this snapshot, node 2 has changed its parent to node 3 and has skipped node 14, communicating with the gateway using the path 12-3-GW. These results confirm that our LoRa mesh network module can dynamically form a wireless mesh network and adapt to environmental changes. Note that, in both snapshots, node 18 was not connected to the network at the moment the snapshot was taken. Further examination revealed that it was located indoors and was not in a good position to contact a potential parent. Node 18 still achieved at most an average PDR of 69.74%, as show in Fig. 15.

Fig. 14 shows how the GW and the nodes were deployed in this experiment. The GW uses a 3-dBi omni-antenna installed on the roof of the building. All nodes were installed at locations that were not in the line of sight of the GW.

Fig. 15 shows the end-to-end PDR of this campus-scale experiment. The PDR was counted on the gateway side, based on the data log collected in this experiment. For ease of evaluation, data were analyzed by applying different limited-hop counts. In the figure, **1Hop** indicates that all nodes were restricted to sending data to the GW with only one hop, that is, with no relay from other nodes. If a data packet was delivered back to the GW with more than two hops, this packet was not counted in the 1Hop PDR. Therefore, the performance of 1Hop includes only packets delivered with one hop, so it can be seen as a LoRaWAN simulation. We can see that the 1Hop PDRs are relatively low. Some nodes did not successfully deliver any data to the GW, resulting in PDRs of 0% (i.e., nodes 1, 4, 8, 12, 17, 18, and 19 in Fig. 15). This result indicates that the one-hop LoRa network does not perform well for indoor nodes, which again confirmed the analysis of previous studies [11],[12],[13]. The PDR could fall even further if nodes are allowed to send data actively (such as in the ALOHA protocol in LoRaWAN approach). The proposed design, by contrast, uses a polling-based approach whereby all the nodes listen for

requests from the gateway, then report data only when queried, avoiding the problem of intra-network packet collision.



Fig. 14. Pictures of the GW and nodes deployed in this experiment.

For these low-PDR nodes, with the exception of node 4, the PDRs increased dramatically if the hop-count constraint was relaxed to **3Hop**, allowing a node to use, at most, three hops to deliver data to the GW. For example, the PDR of node 12 was 0% at 1Hop, but it increased to 94.94% at 3Hop. For all nodes, the average 1Hop PDR was 58.7% and the average 3Hop PDR was 88.49%. These results support our assertion that the proposed LoRa mesh networking solution can increase PDR without deploying an additional GW, avoiding additional infrastructure costs associated with collecting IoT sensor data.

With regard to the relationship between transmission distance and PDR, multiple factors affect the PDR, including buildings, obstacles, interferences in the field, the location of the node, such as whether it is indoors or outdoors, or whether it is on a first floor or top floor. Thus, the geographical distance based on the top-down view does not always correlate with the PDR. Transmission distance is not a good factor for estimating PDR, which is very difficult to model without considering these factors.

Fig. 16 shows the parent candidates for node 10 in the experiment. Note that this does not include the case in which node 10 sends data directly to the GW. In this design, a node chooses its parent according to its current local information. If the environment changes or the node loses contact with its current parent for a period of time (i.e., 5 minutes pass without receiving any command or data request from its parent), then the node will try to find a new parent by sending a JOIN request. Fig. 16 shows that if node 10 cannot join the GW, then it has four parent candidates: nodes 3, 9, 14, and 15. Referring to the pie chart on the left side of the figure, we can see that node 9 was node 10's parent 74% of time and transferred 7,085 packets. The bar chart on the right side of the figure indicates that node 9 had the highest average PDR, almost 100%, and the strongest RSSI among all the parent candidates.

Fig. 17 shows the relationship between RSSI and PDR. These signal quality statistics are based on delivery of all packets to the gateway. We can see that the average PDR was above 96.1% when RSSI was larger than  $-110$  dBm, and the average PDR dropped to 5.8% when the RSSI was smaller than  $-130$  dBm. In the range from  $-110$  dBm to  $-130$  dBm, the RSSIs decreased as the standard deviation of PDR increased, indicating unreliable communication. The maximum standard deviation of PDR occurred when RSSI was in the range of  $-120$  dBm to  $-130$  dBm. In this range, packet delivery was unreliable, so nodes should avoid low RSSI parents if a stable communication path is to be established.

Fig. 18 illustrates the relationship between PDR and SNR. We can see that larger SNR accompanies higher PDR and smaller standard deviation of SNR. For all SNR values larger than  $-5$ , the PDRs are greater than 94.2%. A significant cliff appears in the PDR trend at SNR below  $-20$ , dropping the average PDR to only 5.4%; by contrast, the PDR was still 65% when the SNR was in the range of  $-15$  to  $-20$ .

The above information in combination with the results suggests that a stable LoRa PHY link with a PDR  $> 90\%$  can be achieved with RSSI  $> -110$  dBm and SNR  $> -5$ . By contrast, this would be impractical for LoRaWAN systems, which require deployment of more gateways near the nodes to achieve the same RSSI and SNR. This further supports the proposed design, which can increase PDR while circumventing the requirement for additional gateways.

## V. DISCUSSION AND CONCLUSION

This study presents the design of a LoRa wireless mesh network system for collecting data from IoT sensors distributed across a large geographical area. Our preliminary and in-building experiments confirmed the findings of previous studies regarding the effect of various LoRa PHY parameters (e.g., SF, BW) on communication performance, including PDR and time on air. In our campus-scale experiment, 19 LoRa nodes were distributed over an  $800\text{m} \times 600\text{m}$  area. Data analysis comparing the LoRa PHY one-hop wireless network (i.e., simulated LoRaWAN) with our proposed LoRa mesh network shows that the mesh network can significantly increase PDR without installing additional gateways. In addition, parent selection, PDR vs. RSSI, and PDR vs. SNR were comprehensively analyzed. The results suggest thresholds for RSSI and SNR for maintaining communication quality. These thresholds may be impractical for LoRaWAN architecture, where achieving the ideal RSSI and SNR would require deployment of many additional gateways, thus raising the cost of the infrastructure.

As far as we know, this is the first academic study extending LoRa PHY to mesh networking. It is also the first to evaluate such a mesh network in practical experiments over a large geographical area. This study has explored the potential of IoT sensor deployment and monitoring and collecting of data from those IoT sensors in an area requiring long-range transmissions. Further study on this topic will focus on adjusting the SF/BW parameters dynamically to raise PDR. Further study will also be required to understand how to minimize delays in data transmission from the nodes. In the current design, the node can

send out data only if it has received a command to do so from the gateway. If nodes are allowed to send data actively, without waiting for a data request from the gateway, as in the ALOHA LoRaWAN approach, packet collision may decrease PDR in the event that many nodes send data simultaneously. Striking a balance between transmission delay and packet collision is a complex task.

Regarding the timing performance degradation, as the proposed method uses a mesh network, the number of nodes that a network can serve is smaller than for conventional star-topology networks. Referring to Fig. 8, for a one-hop node (i.e., node 1 in Fig. 8) the message transmission time is  $2t$ , where  $t$  is the time to transfer a message  $M$ . For a two-hop node (i.e., node 3 in the figure), the time is  $4t$ , and for a three-hop node it is  $6t$ . Considering a given period time  $p$ , the number of nodes from which a gateway can collect data in a star-topology network is  $p/2t$ , but this drops to only one-third of that ( $p/6t$ ) when all the nodes are three-hop nodes in the mesh network. The mesh network is a solution for trading off long range with multiple hops, and it can reduce the number of nodes that can be served in given period of time. Therefore, this degradation of timing performance should be considered in designing the IoT data collecting system. Meanwhile, in this design, in order to avoid multiple nodes simultaneously uploading their data over the wireless network, causing data collisions, the gateway is responsible for polling data from the nodes and the nodes are not allowed to actively upload data. The drawback of this approach is that the latency between generating data in a node to uploading that data to the gateway is high. However, the polling approach has greater flexibility by allowing the gateway to decide when to query which node, in contrast to the approach in which communication is initiated by nodes or centralized scheduling.

In addition, questions remain about the security of such a network. As this study focuses on data transmission, security issues have not been discussed in this paper. However, we can directly apply LoRaWAN's security solution, which uses Application Server to provide application session keys for end-to-end security and Network Server to provide network session keys for network session security in a multi-hop network.

Finally, the cost in terms of power consumption may also be an issue if this system is to be implemented with, for instance, battery-powered nodes. Regarding the issue of low power at nodes, the router node needs to help relay data from other nodes, so its wireless transceiver must be on at all times; thus, high power consumption is unavoidable. Therefore, in the current design, all the router nodes are wall-powered. If some nodes have limited energy, a straightforward approach can be used to disable the data relaying function of these nodes, similar to LoRa Class A End Devices [25]. Thus, energy used in wireless communication can be saved as a *simple node*, that is, one with its data relaying function disabled, only enables its wireless transceiver while it needs to send or receive data. However, this requires further modifying the protocol and introducing *friend nodes* as defined in the Bluetooth 5.0 mesh network [19] to assist the simple nodes in buffering and relaying data. As the current design has been demonstrated the correctness and performance of the system, such modifications of specific requirements can be pursued in future work.

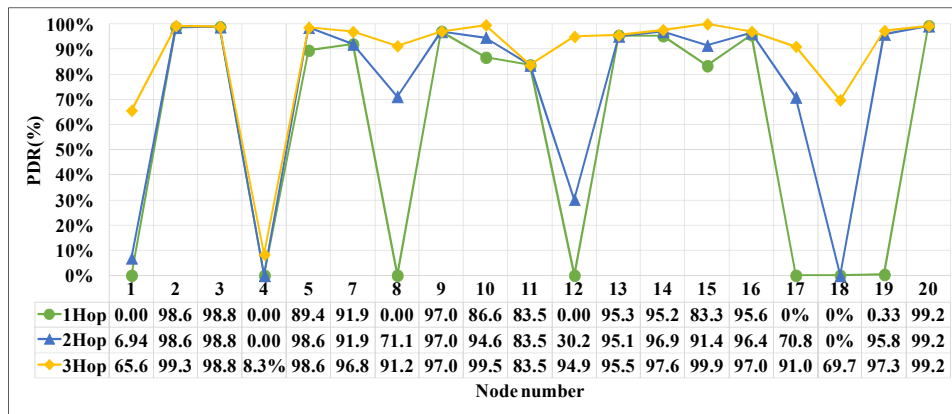


Fig. 15. PDR under different hop-count limitations.

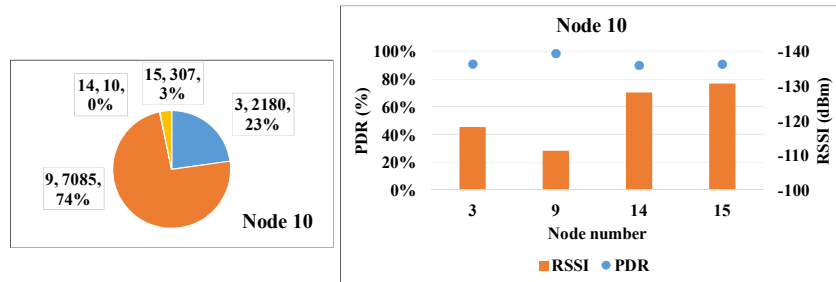


Fig. 16. The parent selections of node 10 in this experiment.

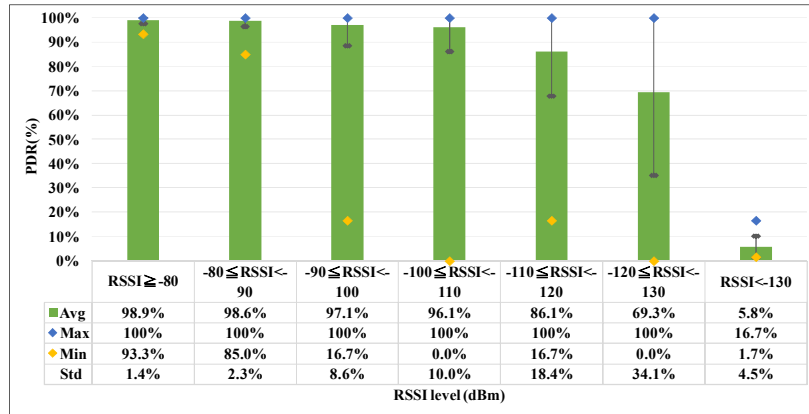


Fig. 17. The relationship between PDR and RSSI.

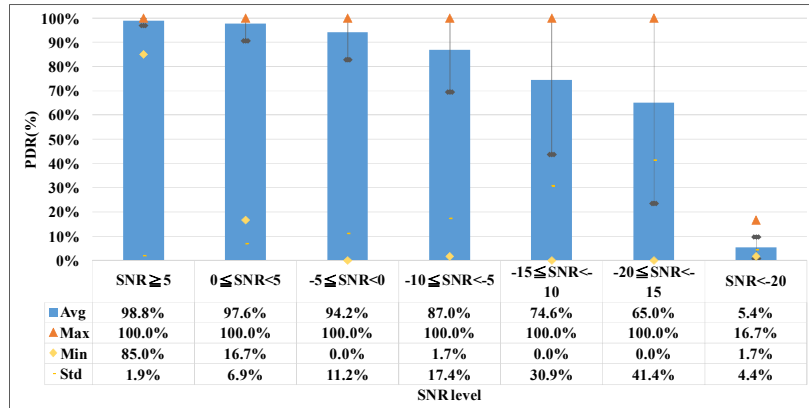


Fig. 18. The relationship between PDR and SNR.

## ACKNOWLEDGEMENTS

The authors would like to thank ICP DAS Co. Ltd, Taiwan, for its financial and technology supports.

## REFERENCES

- [1] Yun Cheng, Xiucheng Li, Zhijun Li, Shouxu Jiang (Harbin Institute of Technology), Yilong Li, Ji Jia (Air Scientific), Xiaofan Jiang "AirCloud: A Cloud-based Air-Quality Monitoring System for Everyone," *SenSys* 2014, Nov. 2014
- [2] Jalpa Shah, Biswajit Mishra "IoT enabled Environmental Monitoring System for Smart Cities", International Conference on Internet of Things and Applications (IOTA), Jan. 2016
- [3] B. Andò, S. Baglio, A. Pistorio, G. M. Tina and C. Ventura, "Sentinella: Smart Monitoring of Photovoltaic Systems at Panel Level," in *IEEE Transactions on Instrumentation and Measurement*, vol. 64, no. 8, pp. 2188-2199, Aug. 2015.
- [4] G. Mois, S. Folea and T. Sanislav, "Analysis of Three IoT-Based Wireless Sensors for Environmental Monitoring," in *IEEE Transactions on Instrumentation and Measurement*, vol. 66, no. 8, pp. 2056-2064, Aug. 2017.
- [5] "Sigfox - The Global Communications Service Provider for the Internet of Things (IoT)", *Sigfox.com*, 2017. [Online]. Available: <https://www.sigfox.com/en>. [Accessed: 02- Sep- 2017].
- [6] "LoRa-alliance". [Online]. Available: <https://www.lora-alliance.org/>. [Accessed: 02- Sep- 2017].
- [7] K. Flynn, "Standardization of NB-IOT completed", *3gpp.org*, 2017. [Online]. Available: <http://www.3gpp.org/news-events/3gpp-news/1785-nb-iot-complete>. [Accessed: 02- Sep- 2017].
- [8] "LoRa Modulation Basics", 2017. [Online]. Available: <http://www.semtech.com/images/datasheet/an1200.22.pdf>. [Accessed: 03- Sep- 2017].
- [9] M. Centenaro, L. Vangelista, A. Zanella and M. Zorzi, "Long-Range Communications in Unlicensed Bands: the Rising Stars in the IoT and Smart City Scenarios". *Fabulous 2015 conference*, Sept. 2015.
- [10] Kai-Hsiang Ke, Qi-Wen Liang, Guan-Jie Zeng, Jun-Han Lin, Huang-Chen Lee, A LoRa Wireless Mesh Networking Module for Campus-Scale Monitoring, The 16th International Conference on Information Processing in Sensor Networks (IPSN 2017), Demo Session, Pittsburgh, Pennsylvania, April 2017.
- [11] N. Varsier and J. Schwoerer, "Capacity limits of LoRaWAN technology for smart metering applications," 2017 IEEE International Conference on Communications (ICC), Paris, 2017, pp. 1-6.
- [12] Thiemo Voigt, Martin Bor, Utz Roedig, and Juan Alonso, "Mitigating Inter-network Interference in LoRa Networks," In *International Conference on Embedded Wireless Systems and Networks (EWSN '17)*. Uppsala, Sweden, Feb. 2017.
- [13] Augustin, A., Yi, J., Clausen, T., & Townsley, W. M. (2016). A study of LoRa: Long range & low power networks for the internet of things. *Sensors*, 16(9), 1466.
- [14] Juha Petäjäjärvi, Konstantin Mikhaylov, Antti Roivainen, Tuomo Hänninen, Marko Pettissalo "On the Coverage of LPWANs: Range Evaluation and Channel Attenuation Model for LoRa Technology" *International Conference on ITS Telecommunications* on 14th, 2015.
- [15] Mikhaylov, K., Petäjäjärvi, J., & Haenninen, T. (2016, May). "Analysis of capacity and scalability of the LoRa low power wide area network technology". In *European Wireless 2016; 22th European Wireless Conference; Proceedings of* (pp. 1-6). VDE.
- [16] M. Rizzi, P. Ferrari, A. Flammini and E. Sisinni, "Evaluation of the IoT LoRaWAN Solution for Distributed Measurement Applications," in *IEEE Transactions on Instrumentation and Measurement*, accepted and to appear, 2017.
- [17] Abramson, N. The Aloha System: Final Technical Report; Hawaii University: Honolulu, HI, USA, 1974.
- [18] "NiceRF LoRa-MESH series Mesh network modules", 2017. [Online] Available: [http://nicerf.com/product\\_149\\_203.html](http://nicerf.com/product_149_203.html)
- [19] "Bluetooth 5.0 Mesh Networking Specifications", 2017, [Online] Available: <https://www.bluetooth.com/specifications/mesh-specifications> [Accessed: 30- Dec- 2017].
- [20] IEC 62591, "Industrial communication networks - Wireless communication network and communication profiles - WirelessHART™", 2010.
- [21] "The ISA100 Standards Overview & Status", 2017. [Online] Available: [http://isa100wci.org/Documents/PDF/ISA100\\_Standards-Overview\\_WC1\\_Webinar\\_V3\\_12Apr10.aspx](http://isa100wci.org/Documents/PDF/ISA100_Standards-Overview_WC1_Webinar_V3_12Apr10.aspx)
- [22] Nuvoton.com. (2017). NUC100 Advanced Series. [online] Available at: <http://www.nuvoton.com/hq/products/microcontrollers/arm-cortex-m0-mcus/nuc100-200-advanced-series/> [Accessed 19 Sep. 2017].
- [23] Semtech.com. (2017). SX1278 137 MHz to 525 MHz Low Power Long Range Transceiver [online] Available at: <http://www.semtech.com/wireless-rf/rf-transceivers/sx1278/> [Accessed 19 Sep. 2017].
- [24] "XBee/XBee-PRO S1 802.15.4 (Legacy) RF Modules", 2017. [Online] Available: <https://www.digi.com/resources/documentation/Digidocs/90000982/Default.htm> [Accessed: 30- Dec- 2017].
- [25] "LoRaWAN Classes", 2017, [Online] Available: <https://www.lora-alliance.org/technology> [Accessed: 30- Dec- 2017].



**Huang-Cheng Lee (SM'12)** received his Ph.D. from the National Tsing-Hua University, Hsin-Chu, Taiwan, in 2010. He has been in the industry since 2000 and has a wide breadth of experience designing personal digital assistants, cellular phones, and low-power embedded systems. He joined the Department of Communications Engineering and Electrical Engineering,

National Chung-Cheng University, Chiayi, Taiwan, in 2011, where he has been an Associate Professor since 2015. He has a strong track record of collaborating with industry partners to transfer technologies from academic research into practice. His current research interests include wireless sensors, mesh networking, internet of things, and low-power embedded systems, especially for natural and industrial environment monitoring. Dr. Lee has been an Associate Editor of the *IEEE Transactions on Instrumentation and Measurement* since 2015 and an Associate Editor of the *IEEE Sensors Journal* since 2017.



Kai-Hsiang Ke received his B.S. and M.S. degrees from the Department of Communications Engineering, National Chung-Cheng University, Taiwan, in 2015 and 2017. He is currently an engineer at Delta Electronics, Tainan, Taiwan.