


machine room

rack

node (AC922 8335-GTG)

the die in one socket

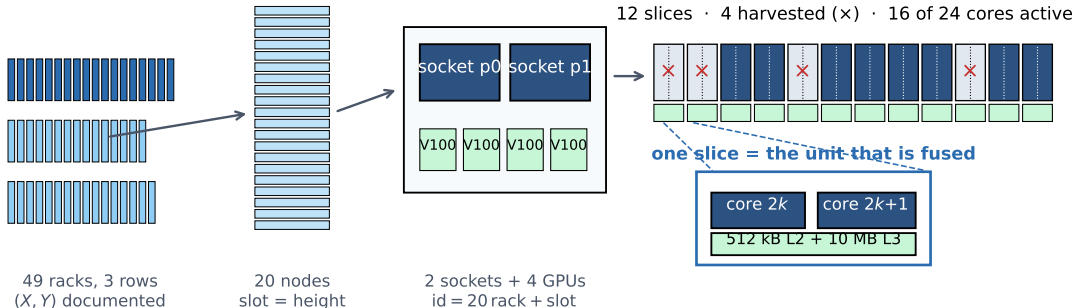

what a change in the recovered map means, and how often (steady state)

RELABEL

19%
p0/p1 tags swap;
no silicon moves

CPU-SWAP

70%
one socket changes;
processor replaced

NODE-SWAP

11%
both change, no mirror;
whole node replaced

GUARD

3 events
one slice deconfigured;
firmware, reversible