

Overview



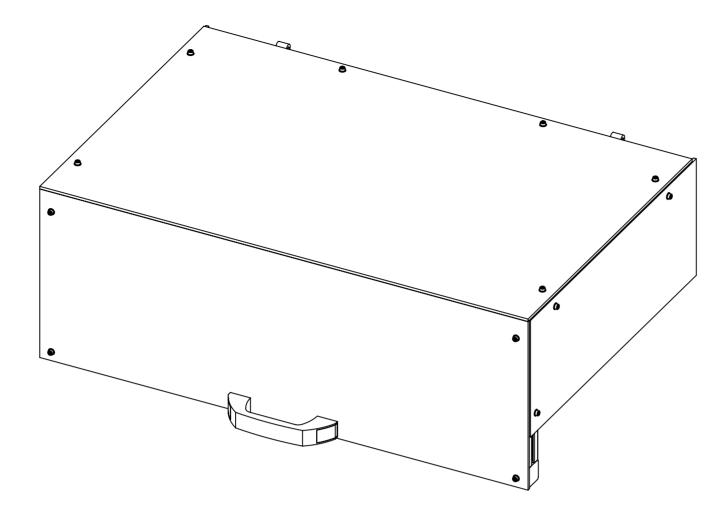


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|-----------|----------------|-----------------------------------|------|
| 1 | DIN 0125-1A M4 | Washer | 16 |
| 2 | DIN 0912 M4x12 | Hex socket head cap screw | 16 |
| 3 | DIN 0912 M6x12 | Hex socket head cap screw | 16 |
| 4 | DIN 0912 M6x16 | Hex socket head cap screw | 2 |
| 5 | DIN 7991 M6x12 | Hex socket countersunk head screw | 4 |
| 6 | HBLFSN6 | 30mm single angle | 4 |
| 7 | HBLFSSW6 | 30mm double angle | 2 |
| 8 | HFCL6-3030-S | Profile end cap | 6 |
| 9 | HFS6-3030-228 | 30x30 profile | 2 |
| 10 | HFS6-3030-402 | 30x30 profile | 2 |
| 11 | HFS6-3030-719 | 30x30 profile | 2 |
| 12 | HNTAP6-4 | Profile nut M4 | 16 |
| 13 | HNTAP6-6 | Profile nut M6 | 22 |
| 14 | OA-Y10-P11-00 | Top lid panel | 1 |
| 15 | OA-Y10-P12-00 | Side lid panel | 2 |
| 16 | OA-Y10-P13-00 | Front lid panel | 1 |
| 17 | UPCDG117 | Handle | 1 |
| MATERIAL: | De | escription | |

SCALE:1:5 MATERIAL: Description Cover

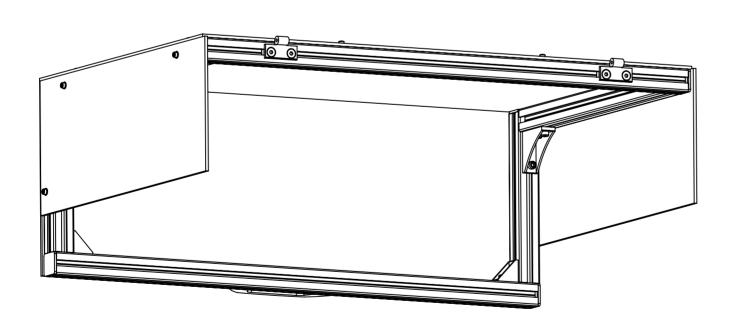


OA-Y10-A02-00

| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS | DRAWN BY | DATE | |
|---|------------|------------|----|
| SURFACE FINISH: Ra 1.6 TOLERANCES: +/- 0.1mm LINEAR: +/- 0.2mm ANGUI AR: +/- 1 ° | Y. de Haas | 14-10-2018 | A2 |

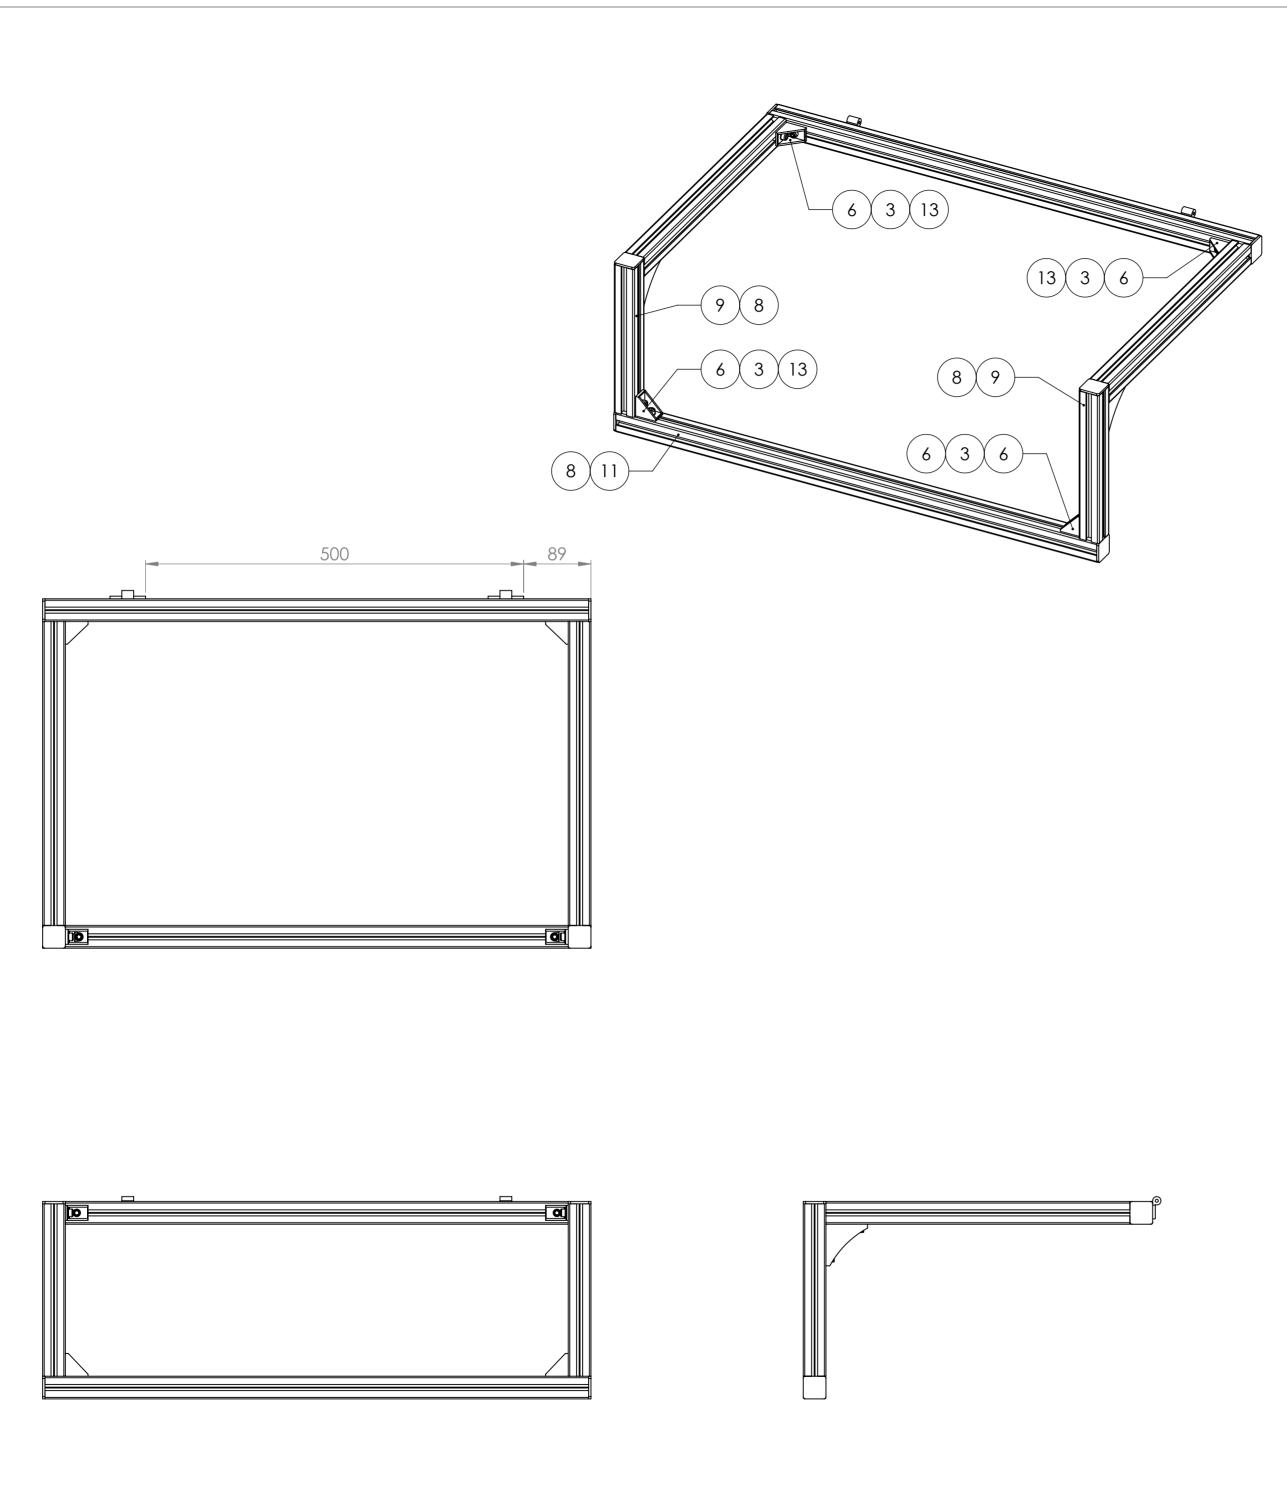

* is other halve of hinge in A01 baseframe

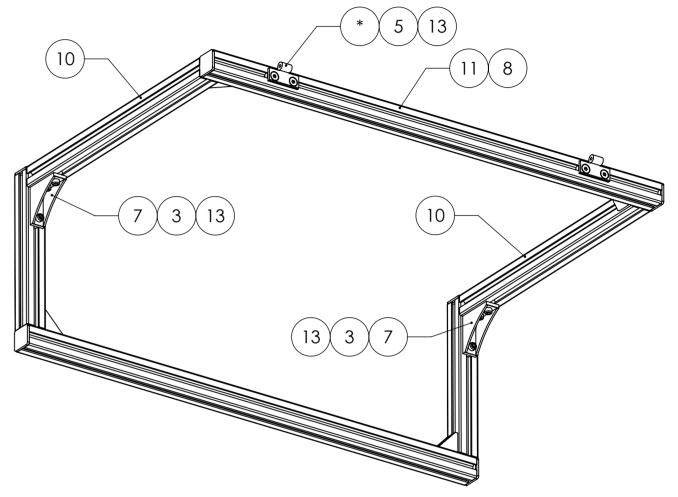

| ITEM NO. | PART NUMBER | N 0125-1A M4 Washer N 0912 M4x12 Hex socket head cap screw | | QTY. |
|------------------|----------------|--|-----------------------|------|
| 1 | DIN 0125-1A M4 | | | 16 |
| 2 | DIN 0912 M4x12 | | | 16 |
| 3 | DIN 0912 M6x12 | | | 16 |
| 4 | DIN 0912 M6x16 | Hex socket he | ead cap screw | 2 |
| 5 | DIN 7991 M6x12 | 1 | untersunk head rew | 4 |
| 6 | HBLFSN6 | 30mm sin | igle angle | 4 |
| 7 | HBLFSSW6 | 30mm do | uble angle | 2 |
| 8 | HFCL6-3030-S | 6-3030-228 30x30 profile 6-3030-402 30x30 profile 6-3030-719 30x30 profile | | 6 |
| 9 | HFS6-3030-228 | | | 2 |
| 10 | HFS6-3030-402 | | | 2 |
| 11 | HFS6-3030-719 | | | 2 |
| 12 | HNTAP6-4 | | | 16 |
| 13 | HNTAP6-6 | Profile | nut M6 | 22 |
| 14 | OA-Y10-P11-00 | Top lic | panel | 1 |
| 15 | OA-Y10-P12-00 | Side lic | d panel | 2 |
| 16 OA-Y10-P13-00 | | Front lie | d panel | 1 |
| 17 | UPCDG117 | Har | ndle | 1 |
| MATERIAL: | | cription | - | |


SCALE:1:5 MATERIAL: Description


COVER



OA-Y10-A02-00

| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS | DRAWN BY | DATE | |
|---|------------|------------|----|
| SURFACE FINISH: Ra 1.6 TOLERANCES: +/- 0.1mm LINEAR: +/- 0.2mm ANGULAR: +/- 1° | Y. de Haas | 14-10-2018 | A2 |

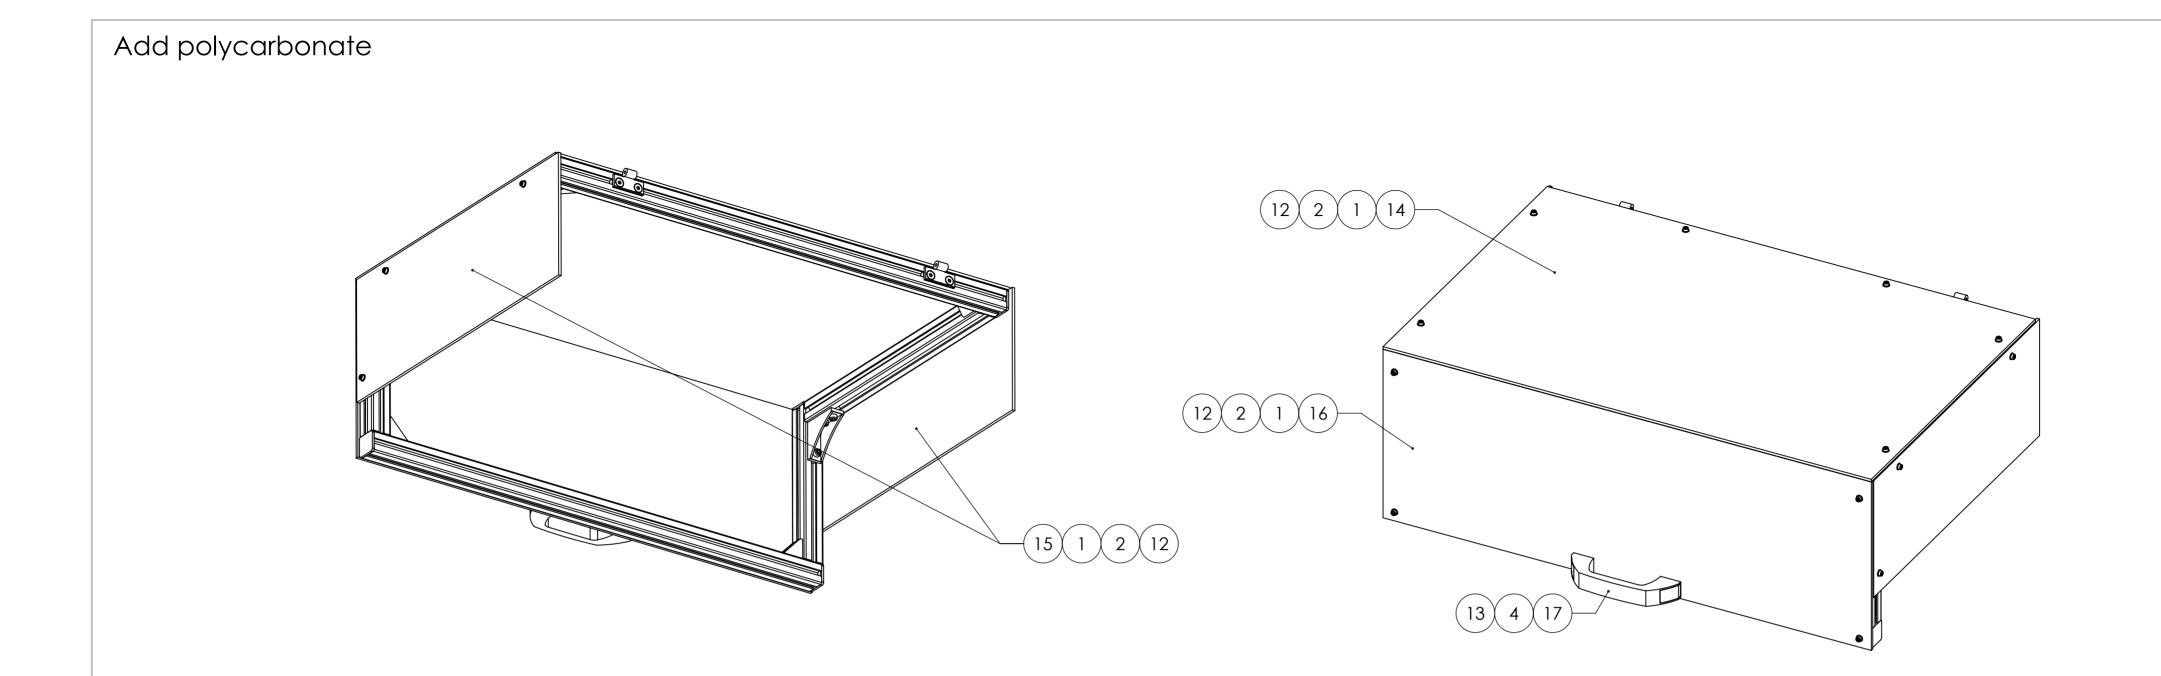

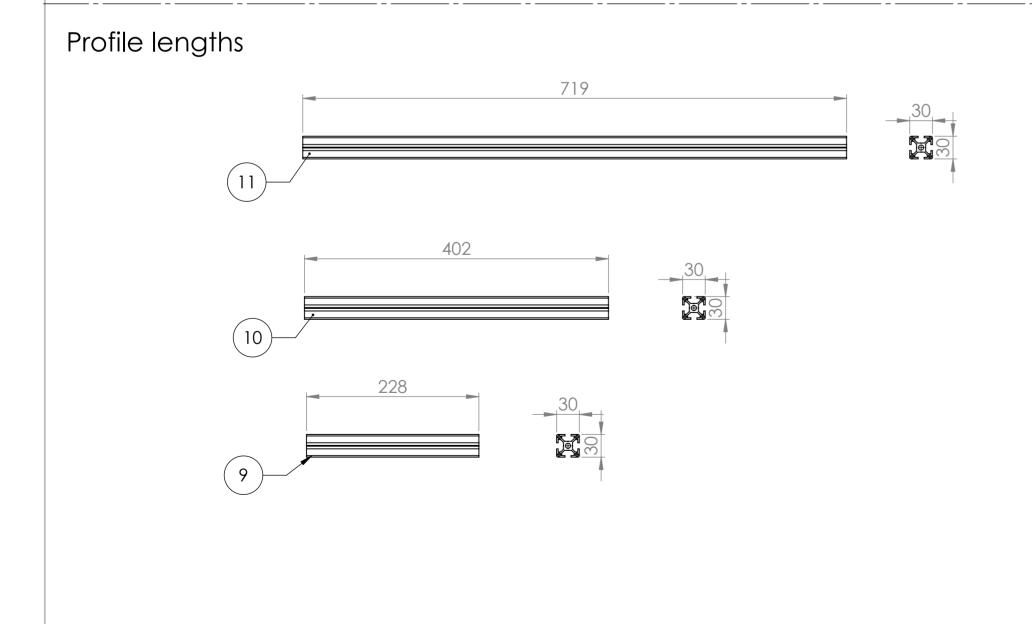

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|-----------|----------------|-----------------------------------|------|
| 1 | DIN 0125-1A M4 | Washer | 16 |
| 2 | DIN 0912 M4x12 | Hex socket head cap screw | 16 |
| 3 | DIN 0912 M6x12 | Hex socket head cap screw | 16 |
| 4 | DIN 0912 M6x16 | Hex socket head cap screw | 2 |
| 5 | DIN 7991 M6x12 | Hex socket countersunk head screw | 4 |
| 6 | HBLFSN6 | 30mm single angle | 4 |
| 7 | HBLFSSW6 | 30mm double angle | 2 |
| 8 | HFCL6-3030-S | Profile end cap | 6 |
| 9 | HFS6-3030-228 | 30x30 profile | 2 |
| 10 | HFS6-3030-402 | 30x30 profile | 2 |
| 11 | HFS6-3030-719 | 30x30 profile | 2 |
| 12 | HNTAP6-4 | Profile nut M4 | 16 |
| 13 | HNTAP6-6 | Profile nut M6 | 22 |
| 14 | OA-Y10-P11-00 | Top lid panel | 1 |
| 15 | OA-Y10-P12-00 | Side lid panel | 2 |
| 16 | OA-Y10-P13-00 | Front lid panel | 1 |
| 17 | UPCDG117 | Handle | 1 |
| MATERIAL: | Descr | iption | |

SCALE:1:5 MATERIAL: Description

COVER



| OA-Y10-A02-00 |
|---------------|
|---------------|

| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: Ra 1.6 TOLERANCES: +/- 0.1 mm LINEAR: +/- 0.2mm ANGULAR: +/- 1.* | DRAWN BY | DATE | |
|--|------------|------------|----|
| | Y. de Haas | 14-10-2018 | A2 |