
Mohammad Tanwir 13 M18CSO54 5B1

1. Selup a LAN in LAB-2 with 10 modes, five connected each to one hill, and the hubs, connected by a switch.

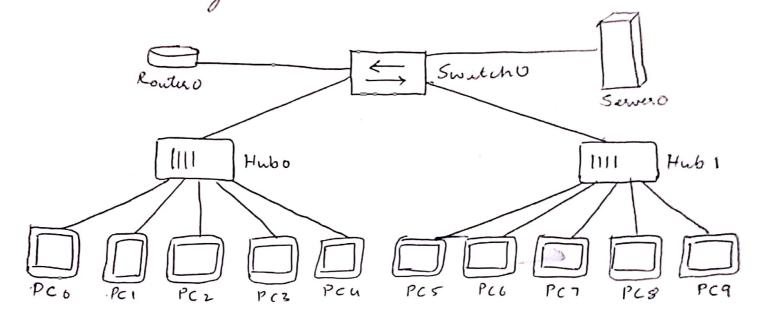

· Assign IP addresses by the PHCP protocol

"Assign gateway to the Pouter and DNS Server address "of the Server o as itself. Assign start IP address.

· bonfigure PCs to use DHCP

Gateway: Louter: 10.0.0.1

DNS Server: 10.0.0.2